

NUMERICAL INVESTIGATION OF FREE CONVECTION OVER A PERMEABLE HORIZONTAL FLAT PLATE EMBEDDED IN A POROUS MEDIUM WITH RADIATION EFFECTS AND MIXED THERMAL BOUNDARY CONDITIONS

MOHD ZUKI SALLEH^{*}, NAJIHAH MOHAMED¹, ROZIEANA KHAIRUDDIN¹,
NAJIYAH SAFWA KHASI'IE¹ & ROSLINDA NAZAR²

ABSTRACT

In this paper, the mathematical modelling of free convection boundary layer flow over a permeable horizontal flat plate embedded in a porous medium under mixed thermal boundary conditions and radiation effects, is considered. The transformed boundary layer equations are solved numerically using the shooting method. Numerical solutions are obtained for the wall temperature, the heat transfer coefficient, as well as the velocity and temperature profiles. The features of the flow and heat transfer characteristics for different values of the radiation parameter N_R , the mixed thermal boundary condition parameter ε and the suction or injection parameter γ are analyzed and discussed.

Keywords: free convection; mixed thermal boundary conditions; permeable horizontal flat plate; porous medium; radiation

1. Introduction

The transport properties of fluid-saturated porous materials are due to the increasing number of important applications in many modern industries, ranging from heat removal processes in engineering technology and geophysical problems. Further examples of convection through porous media may be found in manmade systems such as granular insulations, winding structures for high-power density electric machines, and the cores of nuclear reactor (Bejan 1984; Pop & Ingham 2001; Nield & Bejan 2006).

Following Pop and Ingham (2001), Cheng and Chang (1976) were probably the first to consider the similarity solutions for the free convection boundary layer flow about a heated horizontal impermeable surface embedded in a porous medium, where the surface temperature is a power function of the distance from the origin. In a subsequent paper, Chang and Cheng (1983) pointed out that this boundary layer approximation is identical to the governing equations for the first order inner problem in a matched asymptotic expansion in which other effects, such as fluid entrainment, were taken into consideration. The free convection over an impermeable horizontal flat plate embedded in a porous medium has been discussed by many researchers such as Hsu *et al.* (1978), Ingham *et al.* (1985), Nazar *et al.* (2006), Moghaddam *et al.* (2009), etc. For permeable surfaces, Chaudhary *et al.* (1996) studied the natural convection from a horizontal permeable surface in a porous medium. Results obtained from various asymptotic analyses are found to compare well with those obtained from the direct numerical integration of the equations.

Radiation effects on free convection flow are important in the context of space technology and processes involving high temperature, and very little is known about the effects of radiation on the boundary-layer flow of a radiating fluid past a body. The inclusion of radiation effects in the energy equation, however, leads to a highly nonlinear partial

differential equation (Hossain *et al.* 2001). Hossain *et al.* (1999, 2001) have studied the effects of radiation on free convection from a porous vertical plate with a uniform surface temperature, a uniform rate of suction and with variable viscosity, respectively. Recently, Cortell (2008a, 2008b) separately studied radiation effects on Blasius and Sakiadis flows when the plate is maintained at a constant temperature and conjugate boundary conditions, respectively. He determined the effects of physical parameters like Prandtl number Pr and radiation parameter N_r on the heat transfer characteristics. The previous studies of the free convection boundary layer flow over horizontal surfaces embedded in a porous medium dealt with numerical solutions associated with either prescribed/constant surface temperature or heat flux. Ramanaiah and Malarvizhi (1992) were the first to consider free convection adjacent to a wedge and a cone that are subjected to mixed thermal boundary conditions. Nazar *et al.* (2006) studied the free convection boundary layer flow over vertical and horizontal surfaces in a porous medium with mixed thermal boundary conditions. Laminar free convection flow about a wedge, a cone and a vertical spinning cone under mixed thermal boundary conditions and magnetic field were solved numerically using the Thomas algorithm by Ece (2005, 2009), respectively.

The aim of the study is to study the radiation effects of free convection boundary layer flow over a horizontal flat plate embedded in a porous medium under mixed thermal boundary conditions.

2. Analysis

Consider the steady free convection from a horizontal flat plate embedded in a fluid-saturated porous medium of uniform temperature T_∞ . Dimensional coordinates are used with \bar{x} -axis measured along the surface and \bar{y} -axis being normal to it. The boundary layer equations which govern the steady free convection flow over a horizontal surface which is embedded in a fluid-saturated porous medium are of the form (Pop & Ingham 2001):

$$\frac{\partial \bar{u}}{\partial \bar{x}} + \frac{\partial \bar{v}}{\partial \bar{y}} = 0 \quad (1)$$

$$\frac{\partial \bar{u}}{\partial \bar{y}} = -\frac{gK\beta}{\nu} \frac{\partial T}{\partial \bar{x}} \quad (2)$$

$$\bar{u} \frac{\partial T}{\partial \bar{x}} + \bar{v} \frac{\partial T}{\partial \bar{y}} = \alpha_m \frac{\partial^2 T}{\partial \bar{y}^2} - \frac{1}{\rho c_p} \frac{\partial q_r}{\partial \bar{y}}, \quad (3)$$

where \bar{x} and \bar{y} are the Cartesian coordinates with \bar{x} -axis measured along the horizontal plate and \bar{y} -axis is the coordinate normal to the plate, ν is the kinematic viscosity, g is the gravitational acceleration, β is the thermal expansion coefficient of the fluid, K is the permeability of the saturated porous medium, T is the temperature across the thermal boundary layer, T_∞ is the constant temperature of ambient fluid, $\alpha_m = k/\rho c_p$ is the effective thermal diffusivity, k is the thermal conductivity, ρ is the fluid density and c_p is the specific heat of the fluid at constant pressure.

We shall solve Eqs. (1)-(3) assuming that the boundary conditions for the velocity components \bar{u} and \bar{v} along with the mixed thermal and concentration boundary conditions are

$$\bar{v}(\bar{x}, 0) = v_w(\bar{x}), \quad A(\bar{x})T(\bar{x}, 0) - B(\bar{x}) \left. \frac{\partial T}{\partial \bar{y}} \right|_{\bar{y}=0} = C_1(\bar{x}) \quad (4)$$

$$T(\bar{x}, \bar{y}) \rightarrow T_\infty, \quad \text{as } \bar{y} \rightarrow \infty$$

where $\bar{v}_w(\bar{x})$ is the mass transfer velocity with $\bar{v}_w(\bar{x}) > 0$ when fluid is injected into the flow from the wall and $\bar{v}_w(\bar{x}) < 0$ when fluid is removed through the wall. Let $A(\bar{x})$, $B(\bar{x})$ and $C(\bar{x})$ be the undetermined functions of \bar{x} .

Using the Rosseland approximation for radiation (Bataller 2008), the radiative heat flux is simplified as

$$q_r = -\frac{4\sigma^*}{3k^*} \frac{\partial T^4}{\partial \bar{y}} \quad (5)$$

where σ^* and k^* are the Stefan-Boltzmann constant and the mean absorption coefficient, respectively. We assume that the temperature differences within the flow through the porous medium such as that the term T^4 may be expressed as a linear function of temperature. Hence, expanding T^4 in a Taylor series about T_∞ and neglecting higher-order terms, we get

$$T^4 \cong 4T_\infty^3 T - 3T_\infty^4 \quad (6)$$

In view of Eqs. (5) and (6), Eq. (3) reduces to

$$\bar{u} \frac{\partial T}{\partial \bar{x}} + \bar{v} \frac{\partial T}{\partial \bar{y}} = \left(\alpha_m + \frac{16\sigma^* T_\infty^3}{3\rho c_p k^*} \right) \frac{\partial^2 T}{\partial \bar{y}^2} \quad (7)$$

From this equation it is seen that the effect of radiation is to enhance the thermal diffusivity. Following Bataller (2008), we take $N_R = k k^* / (4\sigma^* T_\infty^3)$ as the radiation parameter, so that Eq. (7) becomes

$$\bar{u} \frac{\partial T}{\partial \bar{x}} + \bar{v} \frac{\partial T}{\partial \bar{y}} = \frac{\alpha_m}{k_0} \frac{\partial^2 T}{\partial \bar{y}^2} \quad (8)$$

where the dimensionless parameter k_0 is defined as

$$k_0 = \frac{3N_R}{3N_R + 4} \quad (9)$$

Further, we introduce now, the following dimensionless variables:

$$\begin{aligned} x &= \bar{x}/L, \quad y = Ra^{1/3}(\bar{y}/L), \quad u = Ra^{-2/3}(L/\alpha_m)\bar{u} \\ v &= Ra^{-1/3}(L/\alpha_m)\bar{v}, \quad \theta = (T - T_\infty)/(T_r - T_\infty) \end{aligned} \quad (10)$$

where T_r is the reference temperature and $Ra = gK\beta(T_r - T_\infty)L/\alpha_m\nu$ is the Rayleigh number for a porous medium. Thus, Eqs. (1), (2) and (8) can be written as

$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (11)$$

$$\frac{\partial u}{\partial y} = -\frac{\partial \theta}{\partial x} \quad (12)$$

$$u \frac{\partial \theta}{\partial x} + v \frac{\partial \theta}{\partial y} = \frac{1}{k_0} \frac{\partial^2 \theta}{\partial y^2} \quad (13)$$

and the boundary conditions (4) become

$$v(x,0) = v_w(x), \quad A(x)(T_r - T_\infty)\theta(x,0) - B(x)(T_r - T_\infty) \frac{Ra^{1/3}}{L} \frac{\partial \theta}{\partial y} \Big|_{y=0} = C(x) \quad (14)$$

$$\theta(x, y) \rightarrow 0 \quad \text{as } y \rightarrow \infty$$

We look for a similarity solution of Eqs. (11)-(13) of the following form:

$$\psi = x^{1/3} f(\eta), \quad \theta = \theta(\eta), \quad \eta = y/x^{2/3} \quad (15)$$

where ψ is the stream function defined in the usual way as $u = \partial\psi/\partial y$ and $v = -\partial\psi/\partial x$.

In order that this similarity solution exists, we assume that $v_w(x) = (2/3) x^{-1/3} \gamma$, where $\gamma > 0$ is for injection and $\gamma < 0$ is for withdrawal of fluid. Substituting (15) into Eqs. (12) and (13), we obtain the following ordinary differential equations

$$f'' - \frac{2}{3} \eta \theta' = 0 \quad (16)$$

$$\theta'' + \frac{1}{3} k_0 f \theta' = 0 \quad (17)$$

where primes denote differentiation with respect to η . It is worth mentioning here that when $k_0 = 1$, the thermal radiation effect is not considered. The boundary conditions (14) reduce to

$$\begin{aligned} f(0) &= -\gamma, \quad a(x)(T_r - T_\infty)\theta(0) - b(x)(T_r - T_\infty)^{4/3} \theta'(0) = 1 \\ f'(\infty) &\rightarrow 0, \quad \theta(\infty) \rightarrow 0 \quad \text{as } \eta \rightarrow \infty \end{aligned} \quad (18)$$

where

$$a(x) = \frac{A(x)}{C(x)}, \quad b(x) = \frac{B(x)}{C(x)} x^{-2/3} \left(\frac{g K \beta}{\alpha_m \nu L} \right)^{1/3} \quad (19)$$

Each of these functions $a(x)$ and $b(x)$ must be equal to a constant to enable a similarity solution. For given values of the constants a, b and T_∞ , the reference temperature T_r may be chosen to satisfy the following equation without any loss of generality

$$a(T_r - T_\infty) + b(T_r - T_\infty)^{4/3} = 1 \quad (20)$$

by defining $\varepsilon = b(T_r - T_\infty)^{4/3}$, the thermal boundary condition (18) can be written as

$$(1 - \varepsilon)\theta(0) - \varepsilon \theta'(0) = 1 \quad (21)$$

It is worth noticing that the case $\varepsilon = 0$ corresponds to the constant surface temperature (CWT) $\theta(0) = 1$, the case $\varepsilon = 1$ corresponds to the constant surface heat flux (CHF) $\theta'(0) = -1$ and the case $\varepsilon = \infty$ corresponds to the mixed thermal boundary conditions (MBC).

3. Results and Discussion

Equations (16) and (17) subjected to boundary conditions (18) are solved numerically using the shooting method for the cases of CWT when $\xi = 0$, CHF when $\xi = 1$ and MBC when $\xi = \infty$. Values of γ considered are $\gamma = -1 < 0$ (suction), $\gamma = 0$ (impermeable wall) and $\gamma = 1 > 0$ (injection).

Table 1: Values of $-\theta'(0)$ when $\gamma = 0$, $k_0 = 1$ (the thermal radiation effect is not considered) and $\xi = 0$ (CWT case)

$\xi = 0$ (CWT)	
$-\theta'(0)$	
Chang and Cheng (1983)	Present
0.4299	0.4300

Table 2: Values of $-\theta'(0)$ for various values of N_R when $\xi = 0$ (CWT) and $\gamma = -1, 0$ and 1

N_R	$\gamma = -1$ (suction)	$\gamma = 0$ (impermeable wall)	$\gamma = 1$ (injection)
0.1	0.1887	0.1766	0.1656
0.5	0.3267	0.2786	0.2360
1	0.4008	0.3242	0.2584
3	0.5074	0.3798	0.2773
7	0.5619	0.4053	0.2824
10	0.5771	0.4121	0.2834
100	0.6138	0.4278	0.2854
1000	0.6180	0.4295	0.2855

Table 1 shows the numerical values of $-\theta'(0)$ when $\xi = 0$ (CWT case) with $\gamma = 0$ and $k_0 = 1$, where the thermal radiation effect is not considered. Numerical result obtained by an implicit finite-difference scheme as reported by Chang and Cheng (1983) for the case of CWT is included in this table for comparison purposes. It is found that the agreement between the previously published result with the present one is very good. We can conclude that this numerical method works efficiently for the present problem and we are also confident that the results presented here are accurate.

Values of $-\theta'(0)$ for various values of N_R when $\xi = 0$ (for the case of CWT) and $\gamma = -1, 0$ and 1 are presented in Table 2. It is observed that $-\theta'(0)$ increases with increasing the radiation parameter N_R for all cases of $\gamma = -1, 0$ and 1 . When N_R is fixed, it can be seen that $-\theta'(0)$ is higher for $\gamma = -1 < 0$ (suction) rather than those for $\gamma = 0$ and $\gamma = 1 > 0$ (injection).

Table 3 presents the values of $\theta(0)$ for various values of N_R when $\xi = 1$ (for the case of CHF) and $\gamma = -1, 0$ and 1 . It is found that $\theta(0)$ decreases with increasing the radiation parameter N_R for all cases of $\gamma = -1, 0$ and 1 . For fixed N_R , it can be seen that $\theta(0)$ is lower for $\gamma = -1 < 0$ (suction) rather than those for $\gamma = 0$ and $\gamma = 1 > 0$ (injection).

Table 3: Values of $\theta(0)$ for various values of N_R when $\xi = 1$ (CHF) and $\gamma = -1, 0$ and 1

N_R	$\gamma = -1$ (suction)	$\gamma = 0$ (impermeable wall)	$\gamma = 1$ (injection)
0.1	3.5514	3.6668	3.7826
0.5	2.3831	2.6061	2.8434
1	2.0525	2.3286	2.6295
3	1.7220	2.0646	2.4579
7	1.5936	1.9669	2.4038
10	1.5613	1.9429	2.3917
100	1.4887	1.8891	2.3667
1000	1.4810	1.8835	2.3642

Table 4: Values of $\theta(0)$ for various values of N_R when $\xi = \infty$ (MBC) and $\gamma = -1, 0$ and 1

N_R	$\gamma = -1$ (suction)	$\gamma = 0$ (impermeable wall)	$\gamma = 1$ (injection)
0.1	173.8079	180.0499	186.3511
0.5	39.9806	46.0506	52.4915
1	23.3410	29.3049	35.8520
3	12.3566	18.1411	24.8680
7	9.2675	14.9515	21.7791
10	8.5786	14.1338	21.0904
100	7.1427	12.7267	19.5120
1000	7.0000	12.5760	19.5120

Table 4 presents the values of $\theta(0)$ for various values of N_R when $\xi = \infty$ (MBC) and $\gamma = -1, 0$ and 1 . It is found that $\theta(0)$ decreases with increasing the radiation parameter N_R for all cases of $\gamma = -1, 0$ and 1 . For fixed N_R , it can be seen that $\theta(0)$ is lower for $\gamma = -1 < 0$ (suction) rather than those for $\gamma = 0$ and $\gamma = 1 > 0$ (injection).

The trend for MBC case is similar to the CHF case but different from the CWT case. It is worth mentioning that the numerical values given in Tables 1 to 4 are very important and they serve as a reference against which other exact or approximate solution can be compared in the future.

Figures 1 and 2 illustrate the velocity and temperature profiles when $N_R = 10$ and $\xi = \infty$ (MBC), respectively. These figures show that the values of $f'(\eta)$ and $\theta(\eta)$ decrease from 1 to 0 as η increases from zero at different values of γ . Also, it is noticed that as γ decreases, both the velocity and temperature profiles decrease and also the thermal boundary layer thickness decreases.

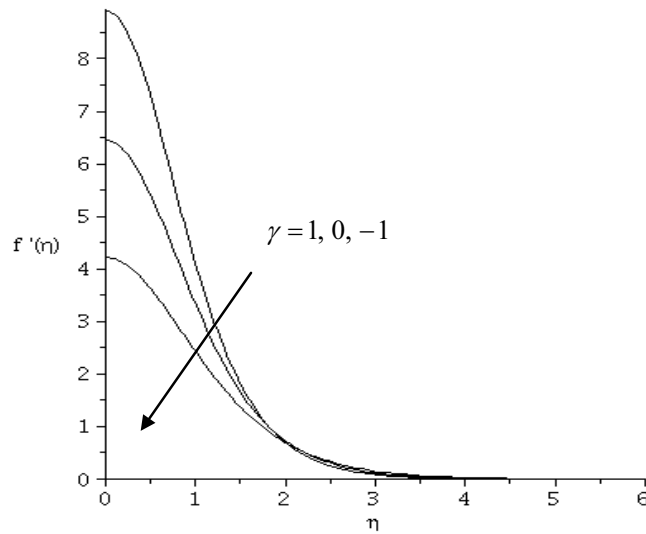


Figure 1: Velocity profiles when $N_R = 10$ and $\xi = \infty$ (MBC case).

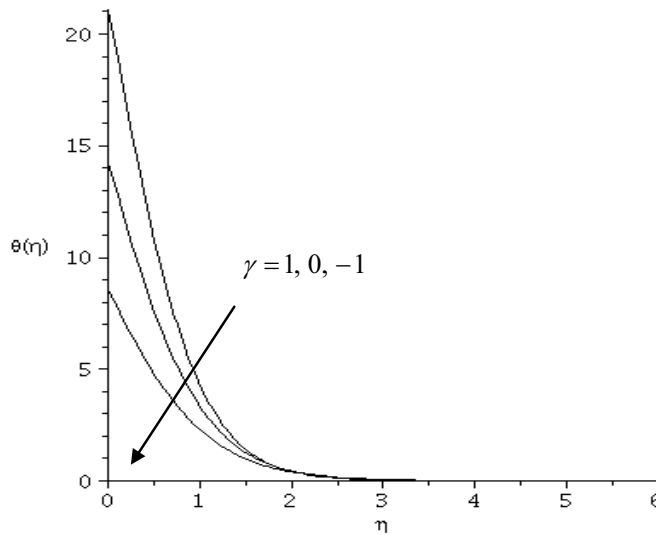


Figure 2: Temperature profiles when $N_R = 10$ and $\xi = \infty$ (MBC case).

4. Conclusion

In this paper, we have numerically studied the problem of free convection over a permeable horizontal flat plate embedded in a porous medium under mixed thermal boundary conditions with thermal radiation effect. We can conclude that when γ is fixed, an increase in the radiation parameter N_R leads to the increase of $-\theta'(0)$ (for the case of CWT). But, when γ is fixed, an increase in the radiation parameter N_R leads to the decrease of $\theta(0)$ (for both cases of CHF and MBC).

Acknowledgments

The authors gratefully acknowledge the financial supports received from the Ministry of Higher Education, Malaysia (UKM-ST-07-FRGSS0036-2009) and a research grant (RDU090308) from the Universiti Malaysia Pahang. The last author is also grateful to MOSTI and ASM for the financial support under the BGM Programme.

References

- Bataller R.C. 2008. Radiation effects in the Blasius flow. *Appl. Math. Comput.* **198**: 333-338.
- Bejan A. 1984. *Convection Heat Transfer*. New York: John Wiley & Sons.
- Chang I.D. & Cheng P. 1983. Matched asymptotic expansions for free convection about an impermeable horizontal surface in a porous medium. *Int. J. Heat Mass Transfer* **26**: 163-173.
- Chaudhary M.A., Merkin J.H. & Pop I. 1996. Natural convection from a horizontal permeable surface in a porous medium – numerical and asymptotic solutions. *Trans. Porous Media* **22**: 327-344.
- Cheng P. & Chang I.D. 1976. On buoyancy induced flows in a saturated porous medium adjacent to impermeable horizontal surfaces. *Int. J. Heat Mass Transfer* **19**: 1267-1272.
- Cortell R. 2008a. Radiation effects in the Blasius flow. *Appl. Math. Comput.* **198**: 333-338.
- Cortell R. 2008b. A numerical tackling on Sakiadis flow with thermal radiation. *Chin. Phys. Lett.* **25**: 1340-1342.
- Ece M.C. 2005. Free-convection flow about a wedge under mixed thermal boundary conditions and a magnetic field. *Heat Mass Transfer* **41**: 291-297.
- Ece M.C. & Öztürk A. 2009. Boundary-layer flow about a vertical spinning cone under mixed thermal boundary conditions and magnetic field. *Meccanica* **44**: 177-187.
- Hossain M.A., Alim M.A. & Rees D.A.R. 1999. The effect of radiation on free convection flow from a porous vertical plate. *Int. J. Heat Mass Transfer* **42**: 181-191.
- Hossain M.A., Khanfer K. & Vafai K. 2001. The effect of radiation on free convection flow of fluid with variable viscosity from a porous vertical plate. *Int. J. Thermal Sci.* **40**: 115-124.
- Hsu C.T., Cheng P. & Homsy G.M., Instability of free convection flow over a horizontal impermeable surface in a porous medium. *Int. J. Heat Mass Transfer* **21**: 1221-1228.
- Ingham D.B., Merkin J.H. & Pop I. 1985. Flow past a suddenly cooled horizontal flat surface in a saturated porous medium. *Acta Mech.* **56**: 205-217.
- Moghaddam M.M., Ghazizadeh H.R. & Mansouri A. 2009. Homotopy analysis solution of free convection flow on a horizontal impermeable surface embedded in a saturated porous medium. *Commun. Nonlinear Sci. Numer. Simulat.* **14**: 3833-3843.
- Nazar R., Arifin N.M. & Pop I. 2006. Free convection boundary layer flow over vertical and horizontal flat plates embedded in a porous medium under mixed thermal boundary conditions. *Int. Comm. Heat Mass Transfer* **33**: 87-93.
- Nield D.A. & Bejan A. 2006. *Convection in Porous Media*. 3rd edition. New York: Springer.
- Pop I. & Ingham D.B. 2001. *Convection Heat Transfer: Mathematical and computational modelling of viscous fluids and porous media*. New York: Pergamon.
- Ramanaiah G. & Malarvizhi G. 1992. Free convection about a wedge and a cone subjected to mixed thermal boundary conditions. *Acta. Mech.* **93**: 119-123.

Fakulti Sains dan Teknologi Industri
Universiti Malaysia Pahang
26300 UMP Kuantan
Pahang, MALAYSIA
E-mail: zukikuj@yahoo.com*

Pusat Pengajian Sains Matematik
Fakulti Sains dan Teknologi
Universiti Kebangsaan Malaysia
43600 UKM Bangi
Selangor, MALAYSIA
E-mail: rmn72my@yahoo.com

*Corresponding author.