

INVESTIGATION OF PARTICULATE MATTER AND COMBUSTION
CHARACTERISTICS OF A DIESEL ENGINE FUELED WITH PALM OIL
METHYL ESTER AND DIESEL BLENDS

AHMAD FITRI BIN YUSOP

Thesis submitted in fulfillment of the requirements
For the award of the degree of
Doctor of Philosophy (Mechanical Engineering)

Faculty of Mechanical Engineering
UNIVERSITI MALAYSIA PAHANG

DECEMBER 2015

ABSTRACT

Diesel engines are attractive power units that are used widely in many fields and have become one of the larger contributors of total petroleum consumption. However, diesel engines are among the main contributors to emissions into the air, especially particulate matter (PM) and nitrogen oxides (NO_x). PM is one of the major pollutants emitted by diesel engines and has adverse effects on human health. However, not many studies have been conducted on the PM concentration and PM morphological and size distribution on biodiesel fuel. Biodiesel, which produces less PM than diesel fuel, is preferred as an alternative source for diesel engines. Therefore, using palm oil methyl ester (POME) for diesel engines would be a more economical and sustainable solution. The objective of this research is to study the PM emissions characteristic from diesel engines fuelled with a diesel and POME blend. A transmission electron microscope (TEM) was used to determine the aggregate fractal prefactor, spherule, and aggregate size distribution. A comparison between diesel and the POME blend was made in terms of PM characterization, which involves PM mass concentration, its components soluble organic fraction (SOF) and dry soot (DS), and its influence on PM morphology such as spherule and aggregate correlation. Combustion characteristics such as in-cylinder pressure and rate of heat release of the engine as well as gaseous emissions were also observed at different operating engine loads. The results show that PM emissions of B100 are lower than those of diesel fuel owing to the oxygen content of POME. Observations of images on PM morphology showed a chainlike agglomeration, which is an extremely small non-uniform nanostructure. Simultaneously, the aggregate size distribution shifted to a smaller diameter as the blending ratio of POME in the fuel increased. The observation of in-cylinder pressure showed that the increment of pressure with the increasing POME blend as well as the increasing engine load is due to high cetane number for B100 that led to a shorten ignition delay. The engine brake thermal efficiency between the POME blend and mineral diesel was comparable. Furthermore, B100 fuels showed lower engine power at higher brake-specific fuel consumption compared to other tested fuels. In terms of gaseous emissions, increasing POME blends led to an increase in CO₂ and NO_x while decreasing CO emission. Meanwhile, as the engine load increased, CO₂, NO_x and CO also continued to increase. The effect of the POME blend on the PM-NO_x trade-off observation showed that B100 simultaneously increased the NO_x and decreased the PM emission. Both the wavelet analysis and coefficient of variation revealed that increasing the POME ratio provided a noticeable effect on increasing the engine cycle-to-cycle variations. It can be concluded that POME creates lower PM concentration while giving some negative feedback to NO_x and resulting in smaller particle size. Moreover, the findings reveal that by having the wavelet analysis, one can predict the behavior of the PM emissions and subsequently further research helps to reduce them effectively and economically.

ABSTRAK

Enjin diesel merupakan unit kuasa yang digunakan secara meluas dalam banyak bidang dan menjadi salah satu penyumbang besar di dalam industri petroleum. Walau bagaimanapun, enjin diesel juga adalah antara penyumbang utama kepada pencemaran udara terutamanya bahan zarah (PM) dan oksida nitrogen (NO_x). PM adalah salah satu daripada punca pencemaran udara yang dihasilkan oleh enjin diesel dan mempunyai kesan yang buruk ke atas kesihatan manusia. Walaubagaimanapun, masih kurang penyelidikan tentang kepekatan PM dan morfologi dan juga saiz PM. Biodiesel adalah salah satu pilihan sumber alternatif untuk enjin diesel yang menghasilkan PM lebih rendah daripada bahan api diesel. Oleh itu, dengan menggunakan minyak sawit (POME), enjin diesel akan menjadi lebih ekonomi dan mampan. Objektif kajian ini adalah untuk mengkaji pencemaran PM enjin diesel dengan menggunakan minyak diesel dan adunan POME. Perbandingan antara diesel dan adunan POME telah dibuat dari segi pencirian PM dimana kepekatan jisim PM, komponennya SOF dan DS dan pengaruhnya terhadap PM morfologi seperti diameter bulatan kecil dan mengumpulkan korelasi boleh ditentukan. Di samping itu, agregat prefactor fraktal, bulatan kecil dan taburan saiz agregat juga dibincangkan secara terperinci. Di samping itu, ciri-ciri pembakaran seperti tekanan di dalam silinder dan kadar pembebasan haba enjin serta pelepasan gas juga telah diperhatikan pada enjin dengan operasi beban yang berbeza. Keputusan menunjukkan pelepasan PM B100 adalah lebih rendah daripada bahan api diesel kerana kandungan oksigen yang terdapat di dalam POME. Pemerhatian ke atas imej PM morfologi menunjukkan bahawa ia berbentuk seperti rantai di mana struktur sangat kecil dan tidak seragam. Pada masa yang sama, taburan saiz agregat telah beralih kepada diameter yang lebih kecil disebabkan oleh nisbah adunan POME dalam bahan api meningkat. Pemerhatian tekanan di dalam silinder menunjukkan bahawa kenaikan tekanan dengan peratusan adunan POME serta beban enjin yang semakin meningkat disebabkan oleh peningkatan nombor cetane untuk B100 yang menyebabkan pencucuhan yang singkat. Kecekapan brek haba enjin adalah setanding dengan adunan POME dan juga minyak diesel. Tambahan pula, bahan api B100 menunjukkan kuasa enjin yang rendah ketika peningkatan pada brek penggunaan bahan api berbanding bahan api yang lain. Dari segi pencemaran gas, peningkatan adunan POME menyebabkan kepada peningkatan dalam pencemaran CO₂ dan NO_x manakala mengurangkan pencemaran CO. Selain itu, peningkatan beban enjin menyebabkan CO₂, NO_x dan CO juga semakin meningkat. Kesan adunan POME di PM-NO_x menunjukkan B100 meningkatkan NO_x dan mengurangkan pelepasan PM. Kedua-dua analisis wavelet dan pekali variasi menunjukan bahawa peningkatan nisbah POME akan memberi kesan yang ketara terhadap peningkatan variasi kitaran ke kitaran. Kesimpulannya POME memberikan kepekatan PM yang lebih rendah tetapi memberikan beberapa kesan negatif kepada NO_x dan juga menghasilkan saiz zarah yang lebih kecil. Di samping itu, dengan adanya analisis wavelet, seseorang dapat menjangkakan perubahan pada pencemaran PM dan juga membantu penyelidikan seterusnya secara efektif dan ekonomi.

TABLE OF CONTENTS

		Page
SUPERVISOR’S DECLARATION		ii
STUDENT’S DECLARATION		iii
ACKNOWLEDGEMENTS		v
ABSTRACT		vi
ABSTRAK		vii
TABLE OF CONTENTS		viii
LIST OF TABLES		xiv
LIST OF FIGURES		xv
LIST OF SYMBOLS		xxii
LIST OF ABBREVIATIONS		xxiii
CHAPTER 1 INTRODUCTION		
1.1	Project Background	1
1.2	Overview of Diesel Engine Emissions Regulation and Controls	5
1.3	Problem Statement	6
1.4	Objectives of The Study	7
1.5	Scope of The Study	8
1.6	Organisation of Thesis	8
CHAPTER 2 LITERATURE REVIEW		
2.1	Introduction	10
2.2	Diesel Engines	10

2.2.1	Types of Diesel Engines	12
2.2.2	Diesel Engine Combustion	13
2.2.3	Diesel Engine Applications	14
2.2.4	Diesel Engine Technology	14
2.2.5	History of Biofuel in Diesel Engines	16
2.3	Particulate Matter	17
2.3.1	PM Composition and Structure	17
2.3.2	Mechanism of Engine PM Formation	21
2.3.3	PM Measurement	26
2.3.4	Overview of a PM Study	31
2.4	Exhaust Emission From Diesel Engines	33
2.4.1	Oxides of Nitrogen (NO _x)	34
2.4.2	Carbon Monoxide (CO)	36
2.4.3	Carbon Dioxide (CO ₂)	38
2.4.4	Particulate Matter (PM)	39
2.5	Health Effect of Diesel Engine Emissions	41
2.6	Worldwide Emissions Regulations	44
2.7	Biodiesel as an Alternatives Fuel	46
2.7.1	Biodiesel Fuel Properties	49
2.7.2	Biodiesel Fuel Blending	52
2.8	Summary	56

CHAPTER 3 METHODOLOGY

3.1	Introduction	57
3.2	Strategy of Framework	57
3.3	Engine Testing Apparatus	59
3.3.1	Diesel Engine Setup	61
3.3.2	Dynamometer and Drive Trains	63
3.3.3	Engine and Dynamometer Cooling Systems	64
3.3.4	Fuel Delivery and Measurement System	66
3.3.5	Engine Wiring	67
3.3.6	Air Intake Measurement System	68

3.3.7	Temperature Monitoring and Measuring	69
3.3.8	In-Cylinder Pressure Measurement and Data Acquisition	70
3.3.8	Ambient Temperature and Relative Humidity Data Acquisition	74
3.3.9	Engine Testing Analysis	73
3.3.10	Combustion Analysis	76
3.4	Exhaust Emissions Measurement	77
3.4.1	Exhaust Gas Analyzer	77
3.4.2	Filter Holder	79
3.4.3	Filter Paper	80
3.4.4	Sampling Pump	81
3.4.5	Forced Convection Oven	82
3.4.6	High-Precision Electric Balance	84
3.4.7	Dichloromethane	85
3.4.8	Transmission Electron Microscopy (TEM)	86
3.5	Particulate Matter Analysis	87
3.5.1	Gravimetric Analysis	87
3.5.2	Image Analysis	87
3.5.3	Empirical Correlation of Aggregate Fractal Morphologies	92
3.6	Engine Cyclic Variation Analysis	93
3.6.1	Coefficient of Variation (COV)	93
3.6.2	Wavelet Analysis Tools	94
3.6.3	Wavelet Mathematical Fundamental	94
3.6.4	Continuous Wavelet Transform (CWT)	95
3.6.5	Wavelet Power Spectrum	97
3.6.6	Global Wavelet Spectrum (GWS)	99
3.6.7	Noise Analysis	100
3.6.8	Cone of Influence (COI)	101
3.7	Tested Fuels and Lubricant	101
3.8	Test Operating Conditions	102
3.9	Test Matrices	102
3.10	Summary	103

CHAPTER 4 RESULTS AND DISCUSSION

4.1	Introduction	105
4.2	Analysis of Fuel Properties	106
4.2.1	Density	107
4.2.2	Kinematic Viscosity	107
4.2.3	Heating Value	108
4.2.4	Cetane Number	109
4.3	Analysis of Engine Performance	110
4.3.1	Engine Performance Curve	111
4.3.2	Engine Brake Power	113
4.3.3	Brake-Specific Fuel Consumption	114
4.3.4	Brake Thermal Efficiency	116
4.4	Experimental Analysis of Fuel Combustion	117
4.4.1	In-Cylinder Pressure And Heat Release	117
4.4.2	Exhaust Temperature	123
4.5	Particulate Matter Concentration	125
4.5.1	PM Mass Concentration	126
4.5.2	Soluble Organic Fraction	128
4.5.3	Dry Soot Component	130
4.6	PM Morphology and Size Distribution	132
4.6.1	TEM Observations	132
4.6.2	Spherule Diameter Distributions	134
4.6.3	Aggregate Fractal Morphologies	139
4.6.4	Aggregate Size Distribution	147
4.7	Gaseous Emission	155
4.7.1	Nox Emissions	155
4.7.2	Carbon Monoxide Emissions	157
4.7.3	Carbon Dioxide Emissions	159
4.7.4	PM - NO _x Trade Off	160
4.8	Engine Cyclic Variation Analysis	163
4.8.1	Sample Size	164
4.8.2	Engine Cyclic Variation Analysis	168

4.8.3	Wavelet Analysis	171
4.9	Summary	193

CHAPTER 5 CONCLUSION AND RECOMMENDATIONS

5.1	Introduction	195
5.2	Summary of Findings	195
5.2.1	Fuel Properties Characterization.	195
5.2.2	PM, Engine Performance, Emissions and Combustion Characteristics	209
5.2.3	Analysis of Engine Cyclic Variations	197
5.3	Novel Contributions of The Study	198
5.4	Recommendation for Future Work	199

REFERENCES 200

LIST OF PUBLICATIONS 213

APPENDIXES 216

Appendix B1	216
Appendix B2	217
Appendix C1	219
Appendix C2	220
Appendix C3	221
Appendix C4	222
Appendix C5	223
Appendix C6	224
Appendix C7	225
Appendix C8	226
Appendix C9	227
Appendix C10	228
Appendix C11	229
Appendix C12	230

Appendix C13	231
Appendix C14	232
Appendix D1	233
Appendix D2	234

LIST OF TABLES

Table No.	Title	Page
2.1	Ambient air quality standards in selected Asian countries ($\mu\text{g}/\text{m}^3$)	45
3.1	Diesel engine specifications	62
3.2	K-type thermocouple specification	69
3.3	In-cylinder pressure transducer specifications	71
3.4	Kane gas analyser specifications	78
3.5	Filter holder specifications	80
3.6	Filter paper specifications	81
3.7	Sampling pump specifications	82
3.8	Specifications of convection oven	83
3.9	Electric balance specifications	84
3.10	Dichloromethane properties	85
4.1	Analysis of variance (ANOVA) for density	107
4.2	Analysis of variance (ANOVA) for viscosity	108
4.3	Analysis of variance (ANOVA) for HV	109
4.4	Analysis of variance (ANOVA) for CN	110
4.5	Mineral diesel soot properties from TEM measurements	140
4.6	B5 soot properties from TEM measurements	142
4.7	B10 soot properties from TEM measurements	144
4.8	B20 soot properties from TEM measurements	145
4.9	B100 soot properties from TEM measurements	147

LIST OF FIGURES

Figure No.	Title	Page
1.1	Final consumption of petroleum products	2
1.2	PM deposition in the human respiratory tract	4
2.1	Four-stroke diesel engine cylinder cycles	12
2.2	Comparison between DI and IDI diesel engines	13
2.3	Structure and composition of engine PM	18
2.4	Typical particle size and distribution from diesel engines	19
2.5	PM formation steps	22
2.6	Formation of PM	40
3.1	Flowchart of analysis	58
3.2	Schematic diagram of the test cell for the experimental setup	60
3.3	Engine test rig	61
3.4	Engine characteristic curves at constant half engine load	62
3.5	Eddy current dynamometer	63
3.6	Dynalec dynamometer controller	64
3.7	Engine cooling system diagram	65
3.8	(a) Engine cooling system (b) dynamometer cooling tower	66
3.9	(a) AIC fuel flow meter (b) board computer (BC-3033)	67
3.10	Engine electrical wiring diagram	68
3.11	Air intake system	69
3.12	In-cylinder pressure transducer	70
3.13	(a) Kistler type 2613B1 crank angle encoder (b) Kistler type 2613B2 signal conditioner	71

3.14	(a) DEWECa GUI (b) DEWEsoft GUI	72
3.15	(a) EL-USB-RT data logger (b) EL-USB-RT software logger interface	73
3.16	Kane gas analyser.	78
3.17	Filter holder parts	79
3.18	Placement of filter paper in filter holder	79
3.19	(a) Filter paper (b) trapped PM sample on filter paper	81
3.20	Sampling pump	82
3.21	Gravity convection oven	83
3.22	High-precision electric balance	84
3.23	(a) PM sample in dichloromethane (b) dichloromethane	85
3.24	Tecnai G2 20S Twin microscope	86
3.25	Image analysis process	88
3.26	Scale bar in TEM image	89
3.27	Image prior to threshold	89
3.28	(a) Threshold adjustment (b) binary image	90
3.29	Final binary image	91
4.1	Mitsubishi 4D68 diesel engine performance curves under a half load	111
4.2	Engine brake power at increasing engine speeds	114
4.3	Brake-specific fuel consumption (BSFC) for increasing speeds	115
4.4	Brake thermal efficiencies (BTE) relative to increasing speeds	116
4.5	In-cylinder pressure and heat release curve under engine load of 0.05 MPa at 2500 rpm	118
4.6	In-cylinder pressure and heat release curve under engine load of 0.4 MPa at 2500 rpm	120

4.7	In-cylinder pressure and heat release curve under engine load of 0.7 MPa at 2500 rpm	122
4.8	Variation of exhaust temperature with different fuels under all engine loads	125
4.9	PM concentrations for all tested fuels under all engine loads	127
4.10	SOF concentrations for all tested fuels under all engine loads	129
4.11	DS concentrations for all tested fuels under all engine loads	131
4.12	TEM images of diesel particulates under two engines loads of (a) 0.05 MPa (left) and (b) 0.7 MPa (right) for mineral diesel at 2500 rpm	133
4.13	Probability density function of spherule diameter under the engine load of 0.05 MPa at 2500 rpm	135
4.14	Probability density function of spherule diameters under the engine load of 0.4 MPa at 2500 rpm	136
4.15	Probability density function of spherule diameters under the engine load of 0.7 MPa at 2500 rpm	137
4.16	Statistical determination of average fractal properties using mineral diesel fuel for all engine load conditions	139
4.17	Statistical determination of average fractal properties using B5 biodiesel fuel for all engine load conditions	141
4.18	Statistical determination of average fractal properties using B10 biodiesel fuel for all engine load conditions	142
4.19	Statistical determination of average fractal properties using B20 biodiesel fuel for all engine load conditions	144
4.20	Statistical determination of average fractal properties using B100 biodiesel fuel for all engine load conditions	146

4.21	Percentage of particulates counted as a function of aggregate size range for all tested fuels and engine conditions	148
4.22	Aggregates size distribution under the engine load of 0.05 MPa	150
4.23	Aggregate size distribution under the engine load of 0.4 MPa	152
4.24	Aggregate size distribution under the engine load of 0.7 MPa	154
4.25	NO _x emissions for all tested fuels under all engine loads	156
4.26	CO emissions for all tested fuels under all engine loads	158
4.27	CO emissions for all tested fuels under all engine loads	159
4.28	PM-NO _x under 0.05 MPa engine load for different test fuels at 2500 rpm	161
4.29	PM-NO _x under 0.4 MPa engine load for different test fuels at 2500 rpm	162
4.30	PM-NO _x under 0.7 MPa engine load for different test fuels at 2500 rpm	163
4.31	COVimep samples vs. 1000 consecutive cycles for mineral diesel and different blended fuels under the engine load of 0.05 MPa at 2500 rpm	165
4.32	COVimep samples vs. 1000 consecutive cycles for mineral diesel and different blended fuels under the engine load of 0.4 MPa at 2500 rpm	166
4.33	COVimep samples vs. 1000 consecutive cycles for mineral diesel and different blended fuels under the engine load of 0.7 MPa at 2500 rpm	167
4.34	COVimep variation samples vs. 1000 consecutive cycles for mineral diesel and blended fuels under an engine load of 0.05 MPa at 2500 rpm	169
4.35	COVimep variation samples vs. 1000 consecutive cycles for mineral diesel and blended fuels under an engine load of 0.4 MPa at 2500 rpm	170
4.36	COVimep variation samples vs. 1000 consecutive cycles for mineral diesel and blended fuels under an engine load of 0.7 MPa at 2500 rpm	171

- 4.37 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for mineral diesel fuel under the engine load of 0.05 MPa at 2500 rpm 175
- 4.38 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for mineral diesel fuel under an engine load of 0.4 MPa at 2500 rpm 175
- 4.39 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for mineral diesel fuel under an engine load of 0.7 MPa at 2500 rpm 176
- 4.40 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B5 blended fuel under an engine load of 0.05 MPa at 2500 rpm 177
- 4.41 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B5 blended fuel under an engine load of 0.4 MPa at 2500 rpm 178
- 4.42 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B5 blended fuel under an engine load of 0.7 MPa at 2500 rpm 179
- 4.43 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B10 blended fuel under an engine load of 0.05 MPa at 2500 rpm 180
- 4.44 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B10 blended fuel under an engine load of 0.4 MPa at 2500 rpm 181

- 4.45 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B10 blended fuel under an engine load of 0.7 MPa at 2500 rpm 182
- 4.46 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B20 blended fuel under an engine load of 0.05 MPa at 2500 rpm. 183
- 4.47 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B20 blended fuel under an engine load of 0.4 MPa at 2500 rpm. 184
- 4.48 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B20 blended fuel under an engine load of 0.7 MPa at 2500 rpm 185
- 4.49 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B100 blended fuel under an engine load of 0.05 MPa at 2500 rpm. 186
- 4.50 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B100 blended fuel under an engine load of 0.4 MPa at 2500 rpm 187
- 4.51 Wavelet power spectrum (WPS) and global wavelet spectrum (GWS) of *IMEP* time series for B100 blended fuel under an engine load of 0.7 MPa at 2500 rpm. 188
- 4.52 Global wavelet spectrum (GWS) of *IMEP* time series for (a) diesel, (b) B5, (c) B10, (d) B20, and (e) B100 under an engine load of 0.05 MPa at 2500 rpm 189

- 4.53 Global wavelet spectrum (GWS) of *IMEP* time series for (a) diesel, (b) B5, (c) B10, (d) B20, and (e) B100 under engine loads of 0.4 MPa at 2500 rpm 190
- 4.54 Global wavelet spectrum (GWS) of the *IMEP* time series for (a) diesel, (b) B5, (c) B10, (d) B20, and (e) B100 under an engine load of 0.7 MPa at 2500 rpm 191

LIST OF SYMBOLS

a_j	Wavelet scale
a_o	Smallest wavelet scale
a, b	Mother wavelets controlled parameters
A	Area, m ²
\bar{d}_p	Mean spherule diameter
D_f	Fractal dimension
f_a	Atmospheric factor
f_c	Factor
f_m	Engine factor
J	Largest scale in the wavelet transform
k_f	Fractal prefactor
n	Time index
N_c	Number of cycles
P	Engine brake power
P_o	Observed power
p_o	Corrected power
Q_f	Heating value of the test fuel (MJ/kg)
Q_{gross}	Gross heat release rate
Q_{net}	Net heat release rate
R	Characteristic gas constant
s_o	Smallest resolvable scale in the wavelet transform
t	Time (s)
T	Engine brake torque

LIST OF ABBREVIATIONS

ANOVA	Analysis of variance
ASTM	American Society of Testing Materials
ATDC	After Top Dead Center
BDC	Bottom Dead Center
BSFC	Brake-Specific Fuel Consumption
BTDC	Before Top Dead Center
BTE	Brake Thermal Efficiency
CN	Cetane number
CO	Carbon Monoxide
CO ₂	Carbon Dioxide
COI	Cone of influence
COV	Coefficient of variation
CWT	Continuous wavelet transform
DF	Degree of freedom
DI	Direct Injection
DS	Dry soot
EGR	Exhaust gas recirculation
EN	European Union fuel standard
<i>F</i>	Probability distribution in repeated sampling
GWS	Global wavelet spectrum
H	Hydrogen
HC	Hydrocarbon
IDI	Indirect Injection
<i>IMEP</i>	Indicated mean effective pressure

NO _x	Oxides of Nitrogen
<i>N</i>	Number of Spherules
OH	Hydroxide
PAHs	Polycyclic Aromatic Hydrocarbons
PM	Particulate Matter
PM ₁₀	Particulate matter with diameter less than 10 μm
PM _{2.5}	Particulate matter with diameter less than 2.5 μm
POME	Palm oil methyl ester
<i>Pr</i>	Weight of significance
RoHR	Rate of Heat Release
rpm	Revolution per minute
SD	Standard deviation
SOF	Soluble organic fraction
TDC	Top Dead Center
TSP	Total Suspended Particle
TEM	Transmission Electron Microscope
WPS	Wavelet power spectrum
WHO	World health organization
WT	Wavelet transform

CHAPTER 1

INTRODUCTION

1.1 PROJECT BACKGROUND

Owing to the significant growth of the population, transportation, and the basic industry sectors, the demand for fossil fuel continues to increase (Asif & Muneer, 2007). Its growth began as the Industrial Revolution in Europe took off in the 18th century since vast quantities of fossil fuel were used to power the economy. However, based on the report, it is becoming a global problem as crude oil stock is depleting and its price is increasing. Therefore, significant environmental problems can be seen as the consumption of fossil fuel increases. Based on a BP Statistical Review of World Energy in June 2014, the global primary energy consumption in 2013 accelerated by approximately 2.3% over 2012 despite stagnant global economic growth. Moreover, the consumption and production of all fuels increased, reaching record levels for every fuel type except nuclear power. Global consumption rose more rapidly than the production of each type of fossil fuel. In 2013, the data suggests that growth in global carbon dioxide (CO₂) emissions from energy use also accelerated, although it remained below average (BP, 2014).

On the other hand, global energy consumption will rise by 37% by 2040, whereas crude oil consumption is expected to rise from the current 90 million barrels a day to 104 million barrels a day. However, demand for oil will plateau by 2040 according to the International Energy Agency (IEA) in its latest World Energy Outlook released on November 12, 2014, in London. Interestingly, the report also stated that the global supply of crude oil, other liquid hydrocarbons, and biofuels is expected to be

sufficient to meet world demand for liquid fuel for at least the next 25 years. However, there is substantial uncertainty about the levels of future liquid fuel supply and demand. After the oil crises in the 1970s and 1980s, much of the debate about world oil markets focused on the limitations of supply (Birol, 2014).

According to Malaysia Energy Commission 2014, the total primary energy supply in Malaysia increased by 5.9% in 2012 compared to 3.2% during 2011. The production of crude oil growth was motivated by a 2.8% increase from 28,325 kilotonnes of oil equivalent (ktoe) in 2011 to 29,115 ktoe in 2012. Accordingly, the final energy consumption in 2012 also increased by 7.5%, which is 46,711 ktoe compared to 4.8% in 2011. The transportation sector provided the highest energy demand, which contributed 36.8%, followed by the industrial sector at 29.8%, the non-energy sector at 16.0%, the residential and commercial sectors at 15.1%, and the agriculture sector at 2.3%. Furthermore, in 2012, the total final energy consumption of petroleum products increased by 3.4%, with the major increases coming from kerosene and fuel oil. Final consumption of kerosene increased by 100.1%, whereas the final consumption of fuel oil increased by 85.5%. In a nutshell, petrol and diesel are the largest contributors to the total consumption of petroleum products with 36.2% and 35.6%, respectively, as illustrated in Figure 1.1 (Energy Commission, 2014).

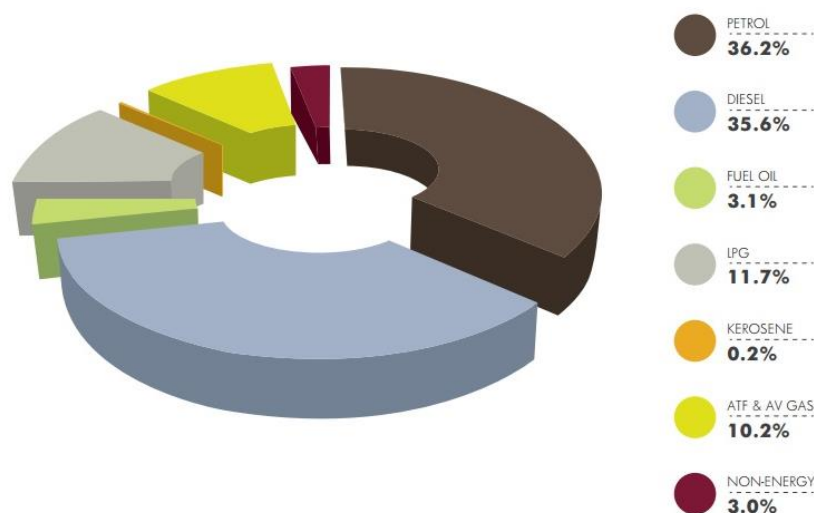


Figure 1.1: Final consumption of petroleum products

Source: Energy Commission (2014)

One of the main contributors to air pollution is the diesel engine. However, diesel engines are attractive power units used widely in many fields because of their great advantages over gasoline engines such as lower fuel consumption, lower carbon monoxide emissions, better torque characteristics, and higher reliability (Heywood, 1988; Stone, 1999). These characteristics make diesel engines the main contributor to total petroleum consumption. In contrast, owing to its lean-burning nature and high temperatures and pressures in the combustion process, diesel engines are the main contributors to air pollution for a large amount of emissions, especially particulates and nitrogen oxides (NO_x) (Heywood, 1988). However, the trade-off trend between NO_x and particulate matter (PM) in diesel combustion is not yet completely solved. One of the solutions identified by many researchers is to replace diesel fuel with an alternative fuel. Many agree that this solution can solve the problem of diesel emissions and also reduce dependence on crude oil. Thus, controlling these emissions is one of the most important aspects of modern air quality management.

Biodiesel is increasingly used as an alternative fuel and is becoming important owing to environmental and energy concerns. Besides, the Ministry of Plantation Industries and Commodities of Malaysia (MPIC, 2014) implement the B7 programme for the subsidized sector beginning in November 2014. B7 involves the blending of 7% palm biodiesel with 93% petroleum diesel. The implementation of the B7 programme would consume 575,000 tonnes of biodiesel, which would contribute towards a savings of 667.6 million liter of diesel a year (MPIC, 2014). Biodiesel, which is considered to be a low-carbon fuel, can be blended with different proportions and directly used in diesel engines without modification. In fact, it has been found that engines fuelled by biodiesel run successfully for longer durations. Moreover, the performance and emissions characteristics are also quite comparable to those of petroleum-based diesel fuel (Gopal et al., 2014).

Research has shown that diesel engines fuelled with palm oil could decrease the emissions produced in terms of smoke, PM, hydrocarbon, sulphur oxide, and carbon monoxide (Kumar & Chauhan, 2013; Lapuerta et al., 2008). However, there are growing concerns surrounding the negative impact of PM emissions from diesel engines on human health and the environment. Moreover, since the great smog of 1952 in

London, tremendous research on adverse health effects of air pollution have been recorded and have led to several changes in practices and regulations, including Clean Air Acts in most countries (Davis, 2002). Thus, many scientists and policy makers have worked together to solve the problems from different perspectives. The investigation has included the epidemiological and the toxicological effect of airborne pollutants. Diesel vehicles contribute significantly to the particulate air pollution problem, especially in metropolitan areas of developing Asian countries (Jin et al., 2014). As depicted in Figure 1.2, the size of the particle determines where it will deposit in the human respiratory tract when inhaled (Home Air Purifier Expert, 2010). Moreover, Peng et al. reported that PM with a size of 10 μm (PM_{10}) can enter the lungs and cause health problems ranging from coughing and wheezing to asthma attacks and severe bronchitis to high blood pressure and heart attacks. Similarly, PM that is 2.5 μm ($\text{PM}_{2.5}$) or smaller tends to penetrate the lungs, causing damage to the alveoli tissues and resulting in coughing and other severe respiratory problems for individuals with asthma or heart diseases. Smaller particles with a diameter less than 100 nm may pass through the lungs and affect other vital organs such as the brain (Organization, 2013; Peng et al., 2008).

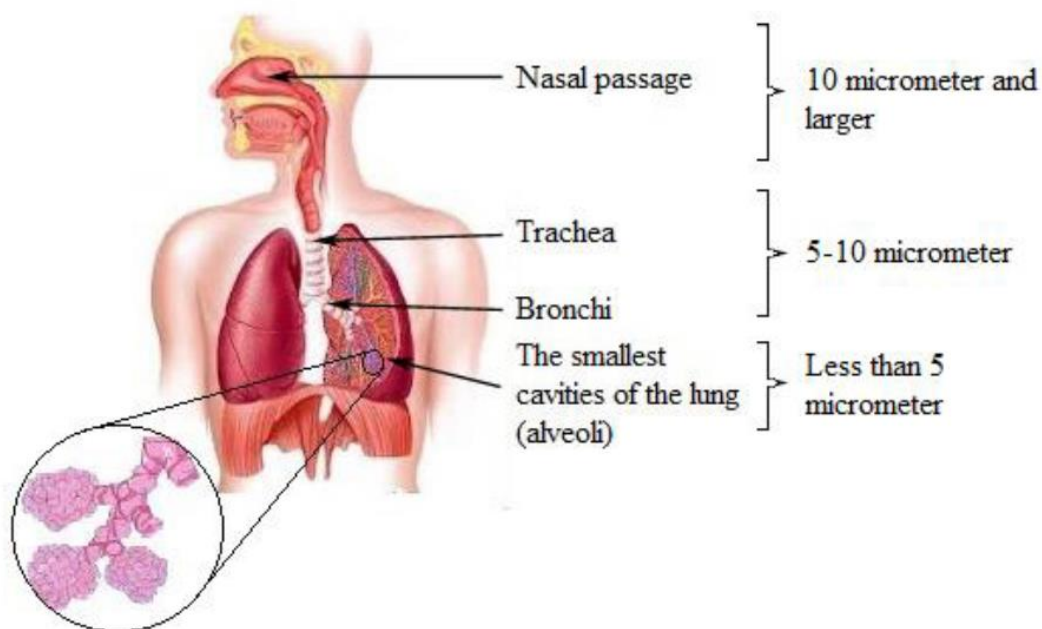


Figure 1.2: PM deposition in the human respiratory tract

Source: Home Air Purifier Expert (2010)