

LINE FOLLOWER BALBOT

TAN PIOW YON

A report submitted in partial fulfillment of the requirements for the award of the
degree of Bachelor of Engineering (Electrical and Electronic)

Faculty of Electrical and Electronic Engineering
University Malaysia Pahang

NOVEMBER 2010

“All the trademark and copyrights use herein are property of their respective owner. References of information from other sources are quoted accordingly; otherwise the information presented in this report is solely work of the author.”

Signature : _____

Author : TAN PIOW YON

Date : 29 NOVEMBER 2010

ACKNOWLEDGEMENTS

First of all, I would like to express my deep and sincere gratitude to my supervisor, Mrs. Normaniha Binti Abdul Ghani, for accepting and giving me this opportunity to have a wonderful final year project. Under her supervision, many aspects regarding on this project has been explored, and with the knowledge, idea and support received from her, this thesis can be presented in the time given.

I would like to extend my appreciation and love to my parents who bore immense difficulties to educate their children at the highest level. Their encouragement and guidance mean a lot to me. All their continuing support, care, and consideration foster my belief in overcoming every obstacle encountered in this project.

My appreciation also goes to our faculty present and former Laboratory Technicians for wonderful co-operation and providing a pleasant working environment. I am grateful to Components' Store person in charge for his guidance and help me to find out all my requested components and always been a source of encouragement.

Last, but not least, I would like to dedicate my great appreciation to all my friends and those whom involve directly or indirectly with this project. I hope that all the knowledge in this project can be shared and give benefit to all. Thank you.

ABSTRACT

This project focuses on the development of a line follower algorithm for a Balbot. In this project, ATMEGA32 is chosen as the brain board controller to react towards the data received from Balance Processor Chip on the balance board which monitoring the changing of the environment through two infra-red distance sensor to solve the inclination angle problem. Hence, the system will immediately restore to the set point (balance position) through the implementation of internal PID algorithms at the balance board. Application of infra-red light sensors with the PID control is vital, in order to develop a smooth line follower robot. As a result of combination between line follower program and internal self balancing algorithms, we able to develop a dynamically stabilized Balbot with line follower function.

ABSTRAK

Projek ini tertumpu kepada pembangunan pengendali pengikut garis dan algoritma untuk Balbot. Dalam projek ini, ATMEGA32 dipilih sebagai pengendali papan utama untuk bertindak balas terhadap data yang diterima dari Cip Keseimbangan pada papan keseimbangan yang memantau perubahan persekitaran melalui dua pengesan jarak infra-merah untuk menyelesaikan masalah sudut cerun. Oleh kerana itu, sistem akan mengembalikan ke titik penentuan (kedudukan keseimbangan) melalui pelaksanaan algoritma PID dalaman di papan keseimbangan. Penerapan pengesan sinar infra-merah dengan kawalan PID sangat penting, dalam rangka untuk mengembangkan sebuah robot pengikut garis halus. Sebagai hasil dari kombinasi antara pengaturcara pengikut garisan dan dalaman algoritma menyeimbangkan diri, kita mampu mengembangkan Balbot stabil secara dinamik dengan fungsi pengikut garisan.

TABLE OF CONTENTS

CHAPTER	CONTENT	PAGE
	TITLE PAGE	i
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xi
	LIST OF ABBREVIATIONS	xiii
	LIST OF APPENDICES	xiv
1	INTRODUCTION	
	1.1 Background of Project	1
	1.2 Problem Statement	3
	1.3 Objective of Project	3
	1.4 Scope of Project	4
	1.5 Project Methodology	4
	1.6 Flow of Project	6

2	LITERATURE REVIEW	
2.1	Introduction	9
2.2	Previous Project Work	10
2.2.1	Balbot	10
2.2.2	nBot and Legway	12
2.2.3	Segway	15
2.2.4	Introduction of Line Follower Robot	16
2.2.5	AVR Line Follower Robot	17
2.3	PID Control Systems	18
3	METHODOLOGY	
3.1	Introduction	20
3.2	Balancing and Line Following control system	23
3.2.1	PID Controller	23
3.2.2	Balancing System	25
3.2.3	Line Following System	27
3.3	Software Review	32
3.3.1	Brain Board Code Editor	32
3.3.2	Mega32 ISP Programmer	34
3.4	Hardware Review	35
3.4.1	Expandable Frame System	36
3.4.2	Brain Board	37
3.4.3	Mode of Operation	39
3.4.4	Balance Board	40
3.4.5	Analog GP2D120 IR Distance Sensor	44
3.4.6	Infra Red Sensors Module	45
3.4.7	DC Gear Motor	46
3.4.8	Full Featured Programmer	47
3.4.9	RS232 Serial Cable	48

4	RESULT AND DISCUSSION	
4.1	Introduction	49
4.2	Balancing System	50
4.3	Line Following System	51
4.4	Initial Calibration	52
5	CONCLUSION AND RECOMMENDATIONS	
5.1	Introduction	54
5.2	Conclusion	55
5.3	Recommendations	55
	5.3.1 Improvement in Control Algorithm	55
	5.3.2 Additional Features and Capabilities	56
	5.3.3 Future Investigation	57
	REFERENCES	58
	APPENDICES	60

LIST OF TABLES

TABLE	TITLE	PAGE
1.1	Gantt Chart PSM 1	7
1.2	Gantt Chart PSM 2	8
3.1	Line Follower Control Algorithm	29
3.2	Modes of Operation in Balance Board	40
3.3	Digital I/O Ports Pin Description	41
3.4	System Connector Pins Description	42

LIST OF FIGURES

FIGURE	TITLE	PAGE
1.1	Project Work Flow	6
2.1	Ralph Hollis and his team's BallBot	12
2.2	nBot	14
2.3	Legway	14
2.4	Segway	16
2.5	AVR Line Follower Robot	18
3.1	Balbot's General System Block Diagram	21
3.2	Balbot's Internal System Flow	21
3.3	PID Controller Block Diagram	24
3.4	Balbot Balancing Control System's Block Diagram	26
3.5	The Movement of Balbot due to the Tilt Angle with Specific Velocity	27
3.6	Flow Chart for the Line Following System	30
3.7	Programming for Line Follower Algorithm	31
3.8	Icon for Brain Board Code Editor	32
3.9	Description on Programmer's Notepad 2 Window	33
3.10	MEGA32ISP's GUI with Steps for Loading Program	34
3.11	Anatomy of Balbot	35
3.12	The Expandable Frame System (EFS)	36
3.13	Balance Board's Components Overview	38
3.14	Balance Board Side View	38
3.15	Brain Board's Components Overview	43
3.16	Brain Board Side View	43

3.17	Analog GP2D120 Infrared Distance Sensor	45
3.18	The Line Follower Controller and IR Sensors	46
3.19	DC Gear Motor	47
3.20	Full Featured Programmer	48
3.21	RS232 Serial Cable	48
4.1	Line Track for the Line Follower Balbot	51

LIST OF ABBREVIATION

TWIP	-	Two Wheeled Inverted Pendulum
Balbot	-	Balancing Robot
PID	-	Proportional Integral Derivative
BPC	-	Balance Processor Chip
BEMF	-	Back Electromotive Force
GUI	-	Graphical User Interface
IR	-	Infrared
I ² C	-	Inter Integrated IC
LED	-	Light Emitting Diode
CV	-	Control Variable
SP	-	Set Point
PV	-	Process Value
MIPS	-	Microprocessor without Interlocked Pipeline Stages
EEPROM	-	Electrically Erasable Programmable Read Only
SRAM	-	Static Random Access Memory
PWM	-	Pulse Width Modulation
DAC	-	Digital Analog Converter
ADC	-	Analog Digital Converter

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	The Procedures to Program the ATMEGA32	60
B	The specification of Balbot	63
C	Programming for Line Follower Balbot Control Algorithm	66
D	Infrared Sensors Circuit Schematic Diagram	76
E	Balbot's Picture	78
F	Track's Photo	80

CHAPTER 1

INTRODUCTION

1.1 Background of Project

Over the past decades, the research on two wheeled inverted pendulum mobile robot or commonly known as balancing robot have gain momentum in a number of robotic centers around the world due to natural unstable dynamics of the system. [1] Since a Two wheeled balancing robot need a good controller to maintain itself in upright position without the needs from external forces. Thus, providing a good platform for researcher to explore the efficiency of various controllers in control system based on the inverted pendulum model. Nowadays, various controllers were implemented on two wheeled balancing robot for example s Linear Quadratic Regulator, Pole-Placement Controller, Fuzzy Logic Controller, and Proportional Integrated Derivative Controller. [3]

A two wheeled balancing robot is categorized by the ability to balance on its two wheels and spin on the spot. As a result from this additional maneuverability allows easy navigation on the various terrains, turn sharp corner, traverse small step or curbs and ability on carry load. Two wheeled robots also have a small footprint than three or four wheeled robots thus enable it to travel around corridors and tight

corners more easily. [4] These capabilities have the potential to solve many challenges in industry and society. As the two wheeled balancing robot has been investigated and developed to become human transport machine. The Segway, Pegasus, and iBot models are the example of the design of two wheeled balancing robot as a human transport machine. In addition, a motorized wheelchair utilizing this technology would give the operator greater maneuverability and thus access to places most able-bodied people take for granted. Small carts built utilizing this technology allows humans to travel short distances in a small area or factories as opposed to using cars or buggies which is more polluting. [2]

In this project, Balbot Advanced is an autonomous, active-balancing robot that is fully customizable been design and fabricate as two wheeled balancing robot platform that has ability to balance itself on a flat terrain with add-on line follower function. The robot chassis design is robust and symmetrical with high centre of gravity. These mobile robots not only solve the balancing problem but also can automatically move around and avoid basic obstacles through the implementation of Dual ground Sensor and looking forward infrared sensor respectively. The Dual ground sensor is located at the bottom of the Balbot which is the infrared IR distance sensor, where ground sensors are used to measure the tilting angle. Powerful ATMEGA32 processor is used to be the brain of the robot. BEMP motor velocity sensor is used to obtain the speed of the platform. The entire controller algorithm will be compute into C programming and store inside the microcontroller. Without an active control system, the robot would just fall over. Thus, the controller plays an important role in this project. Lastly, three pairs of infra-red sensor are used to guide the line follower task during balance state.

There are a few specific tasks included such as:

1. Integration of sensor to determine and updating the status of the platform.
2. Integration of hardware for data acquisition.
3. Integration and testing of the performance of the controllers for trajectory control.
4. Integration of hardware for line follower application.

1.2 Problem Statement

The problem statement for this project work is expressed as follows:

“To develop a stable line follower circuit and control algorithm for the purpose of line following of two wheels balancing robot”

1.3 Objective of Project

There are three main objectives in this project which are;

- 1) To control the Balbot with line following function using Atmel Microcontroller.
- 2) To design and construct a simple and functional IR sensors circuit for line detection.
- 3) To program the microcontroller to perform stable and smooth line following task during balanced state.

1.4 Scope of Project

In order to achieve the objective of the project, there are few scopes had been outlined which involve hardware and software:

- 1) A Balbot is to be considered able to conduct self-balancing and position control using Linear Controller via the existing balance board and default program.
- 2) Construct a line following hardware system using Infra-red sensor.
- 3) Develop a line follower algorithm to perform line following task.

1.5 Project Methodology

The research project are divided into chapters, each recorded a chronological step in the process of developing and structure the Line Follower Balbot. This approach was utilized in attempt to progress the project from one task to the next as it was undertaken. Each is clear so that it builds on the preceding task thus evolving the robot within the goals and requirements generated. This eventually led to the completion of the Balbot that met the objectives within the timeframe available.

Chapter 1 formed the first step where key points and objectives were established including the idea of actually what is a two wheeled balancing robot. Understanding about this project is critical in determining plans for conducting research and performing the design work.

Chapter 2 provides the second step in which a comprehensive understanding of previous projects and approaches is required. This established the foundations for making informed decision based on the past experiences and problem encountered. This can help set up an avoidance of problems, sufficient planning of resources and the helpful application of effort.

Chapter 3 entailed the software review, hardware review, and balancing with line following algorithm in Balbot. Detailed information about the basic operation of Balbot and hardware specification such as microcontroller Brain Board and Balance Board was listed and explained. The Balbot is considered to be balances on its body first then line following can be conducted. The line following feature for Balbot is based 3 infra-red sensors and the line follower programming algorithm that had designed. This step expanded to include a method to setup the Balbot and loading program on to the Balbot.

The subsequent step was to analyze the actual performance of the Balbot and ascertain its ability in achieving the objectives of balance and following line. This also provided the opportunity to calibrate and perform additional fine tuning of the output allowing it to become more effective and efficient in its performance.

The final component comprises of a complete assessment of each process undertaken, the choices made and achievements obtained during the project as well as evaluation of the final Balbot effectiveness. This expanded to include recommendations for future work that could be undertaken in an effort to improve areas of the process or design, addition of capabilities, or how to overcome problems that may have been encountered.

1.6 Flow of Project

The project implementation and works flow for Balbot are summarized into flow chart as shown in figure 1.1. The details of the works of the project that had been implemented are shown in the form of Gantt chart for both PSM 1 and PSM 2 as in Table 1.1 and Table 1.2.

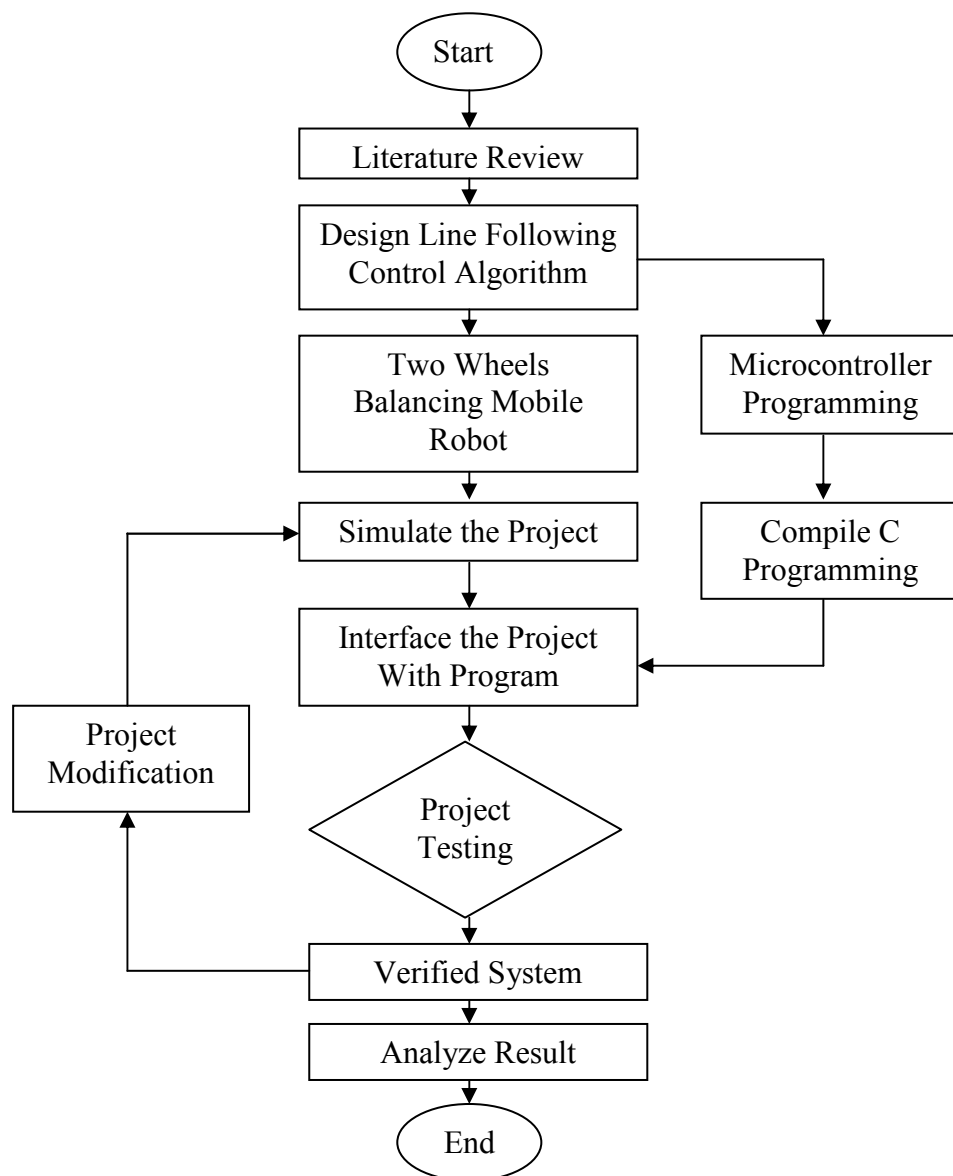


Figure 1.1: Project Work Flow

CHAPTER 2

LITERATURE REVIEW

2.1 Introduction

Conducting literature review prior to begin a research project is vital in understanding two wheels balancing robot control technique, as this will supply the researcher with much needed additional information on the methodologies and technologies available and used by other research counterparts around the world. This chapter provides a condensed summary of literature reviews on key topics related to balancing a two-wheeled robot. [2] Comparisons between the present project and the related topics of existing information will also be discussed.

The two wheels balancing concept has been a topic of high interest among the control engineering community. The uniqueness and complexity of the two wheels balancing concept has made it an ideal concept that can be used for both commercial and military (government) applications. In past few years, researcher and engineers have applied the two wheels balancing model to various fields, which include walking gait for humanoid robots, personal transport systems and robotic wheelchairs. As examples, the Segway is used for commercial purposes and the prototype of the VECNA B.E.A.R robot project can be used for government military

operation. Humanoid like robots that gain the mobility through two wheels have become popular in the past few years in commercial and government.

The control problem can be simulated and implemented on a classroom setting to teach control engineering students the need for control in the unstable two wheeled robot. The following research literature abstracts summary of some popular balancing robot platforms and extra features technologies that are related and used by researchers and engineers around the world which are available in an attempt to gain an understanding and appreciation of two wheels balancing robot.

2.2 Previous Project Work

2.2.1 BallBot

A research professor at Carnegie Mellon University, Ralph Hollis who has developed a totally unique balancing robot that balances on top of a bowling ball. He calls his robot design “BallBot” [5, p. 72]. Mr. Hollis and his research associates believe that robots in the future will play a vital role in the daily lives of humans. He believes that in order for robots to be productive in our daily lives, some key problems need to be solved first. One the important problem he states in his article about mobile self balancing robots is the overall structure of the robot itself.

As stated by Ralph Hollis,” Robots tall enough to interact effectively in human environments have a high centre of gravity and must accelerate and decelerate slowly, as well as avoid steep ramps, to keep from falling over. To counter

this problem, statically stable robots tend to have broad bodies on wide a wheelbase, which greatly restricts their mobility through doorways and around furniture or people” [5, p. 74]. The size of the robots will ultimately affect its mobility of the robot. In order to solve the problem, Hollis came up with a new design that improved the robot’s overall structure and mobility. Hollis and his associates have built a five foot tall, agile, and skinny robot. The robot’s design is to balance itself on top of a spherical wheel. Hollis compares his robot structure design much like a giant ball pen or a circus clown trying balance on top of a ball. [6]

A side from acknowledging and solving the structure and mobility difficulty, Hollis also faced a major challenge when it came to keeping the self-balancing robot on a stable vertical position. Hollis found that the best way to solve this new issue was by implementing into his design advance sensors and control algorithms. The sensors that he incorporated included a gyroscope and an accelerometer. They were set and placed orthogonal to each other. Hollis implemented a Linear Quadratic Regulator (LQR); a control algorithm technique used to keep the BallBot in a stable vertical state. The LQR is based on optimal control theory.

The main objective when using optimal control techniques on a system is to minimize the effort to stabilize the BallBot in the vertical position. The Ballbot’s incorporates optimal control algorithms. These control algorithms helped increase stability and system robustness. BallBot major strength is the inertial measurement units used to provide the tilt angle information. The Ballbot’s size and inability to climb staircases were obvious weaknesses. Hollis’s article “BallBot” is informative piece of literature that has presented a technological innovation in robotics. It has inspired parts of this master’s project.

Just like Hollis BallBot, this master’s project two wheeled balancing robot also incorporates the control techniques in order to achieve a vertical stability. After acquiring additional information on both the gyroscope and accelerometer sensors, it was determined that it was the best choice of sensors to be implemented in the self-

balancing two wheel robot. As there are similarities between Hollis's BallBot and self-balancing two wheel robot, there are also differences. The structures and control algorithms used were a major difference. As stated before, the BallBot uses optimal control theory to minimize the robot's effort to stabilize. The self-balancing two wheel robot used for this master's project will use classical control theory.



Figure 2.1: Ralph Hollis and his team's BallBot

2.2.2 nBot and Legway

Two wheel balancing robots have also gain popularity among hobbyists and engineering students. Examples of such popular two wheeled balancing include the nBot and the Legway. The two wheeled robot platforms have drawn high interest from the robot enthusiast communities.

nBot is a two-wheeled balancing robot built by David P. Anderson. This robot uses commercially available inertial sensors and motor encoders to balance the system. Such inertial sensors that are used on nBot are an accelerometer and a gyroscope. The basic idea for a two-wheeled dynamically balancing robot is pretty simple which is driving the wheels in the direction that the upper part of the robot is falling. If the wheels can be driven in such a way as to stay under the robot's center of gravity, the robot remains balanced. In practice this requires two feedback sensors: a tilt or angle sensor to measure the tilt of the robot with respect to gravity, and wheel encoders to measure the position of the base of the robot. Four terms are sufficient to define the motion and position of this "inverted pendulum" and thereby balance the robot. These are

1. The tilt angle and
2. Its first derivative, the angle velocity,
3. The platform position, and
4. Its first derivative, the platform velocity.

These four measurements are summed and fed back to the platform as a motor voltage, which is proportional to torque, to balance and drive the robot. (Anderson D.P. 2003)

A researcher, Steve Hassenplug has successfully constructed a balancing robot called Legway using the LEGO Mindstorms robotics kit. Two Electro-Optical Proximity Detector sensors from HiTechnic Sensors to provide the tilt angle information and detect lines. The controller is programmed in high level programming language specifically created for LEGO Mindstorms which was written in brickOS (LegOS) and uses EOPDs to maintain a constant distance from the ground. As the distance decreases, Legway moves forward. As the distance increases, Legway moves backward. Every 50 ms, Legway attempts to recalculate the balance point by measuring the current distance and motor speed. To move forward for line following, Legway actually sets the motors to run backward, causing a tilt, which it automatically corrects by moving forward. When one sensor is over the line, it stops that motor, and Legway balances using only the other motor, causing