

POLYLACTIC ACID(PLA)/ACRYLONITRILE BUTADIENE STYRENE(ABS) NANOCOMPOSITES WITH HYBRID GRAPHENE/ MONTMORILLONITE (MMT)

M. Bijarimi,^{1*} N. K. Nik Zuliani,¹ R.A. Syuhada, S. Nurdin,¹ M.S. Zaidi¹

¹ Faculty of Chemical & Natural Resources Engineering, Universiti Malaysia Pahang, 26300 Gambang, Pahang, Malaysia.

*Corresponding author: bijarimi@ump.edu.my

EXTENDED ABSTRACT

Poly(lactic acid) is widely used as an environmental friendly polymer that benign to the environment. However, PLA is too brittle to be processed industrially and toughness modification is generally required. In this work, PLA was blended with acrylonitrile butadiene styrene (ABS) and graphene nanoplatelet (GnP) / MMT nanofillers were incorporated in PLA/ABS blends system. Melt compounding was carried out in a twin screw extruder with 50 rpm for 15 minutes at temperatures between 160-200 °C. The PLA/ABS and PLA/ABS/GnP/MMT blend systems were characterized for mechanical, thermal, chemical and morphological properties. It was found that the mechanical properties of PLA/ABS/GnP/MMT has improved as compared to PLA/ABS blend. Morphology analysis showed that the mechanical properties improvement could be attributed due to the presence of smaller voids in PLA/ABS/GnP/MMT blend. There were no significant chemical changes on the PLA/ABS and PLA/ABS/GnP/MMT blend systems as revealed by the FTIR spectra.

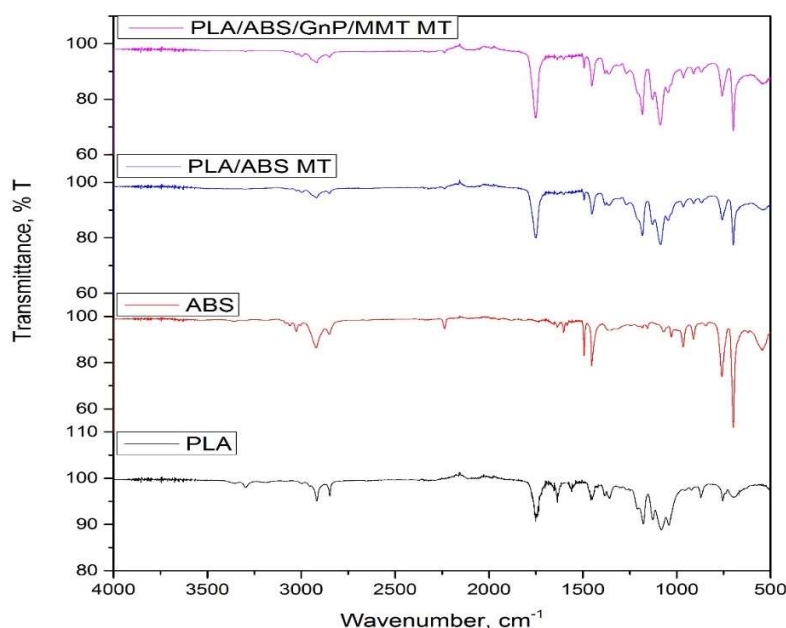


Fig. 1: Transmittance versus wavenumber comparing PLA, ABS, PLA/ABS nanocomposites.

Keywords: PLA; graphene; melt blending; acrylonitrile styrene butadiene; ABS.

Acknowledgment

This study was supported by Universiti Malaysia Pahang research grant RDU160336.

References

- [1] Scaffaro, R., et al., PLA graphene nanoplatelets nanocomposites: Physical properties and release kinetics of an antimicrobial agent. *Composites Part B: Engineering*, 2017. 109: p. 138-146.
- [2] Papageorgiou, D.G., I.A. Kinloch, and R.J. Young, Mechanical properties of graphene and graphene-based nanocomposites. *Progress in Materials Science*, 2017. **90**(Supplement C): p. 75-127.
- [3] Young, R.J., et al., The mechanics of reinforcement of polymers by graphene nanoplatelets. *Composites Science and Technology*, 2018. **154**(Supplement C): p. 110-116.
- [4] Gonçalves, C., et al., Biocompatible reinforcement of poly(Lactic acid) with graphene nanoplatelets. *Polymer Composites*, 2016.
- [5] Nagarajan, V., A.K. Mohanty, and M. Misra, Perspective on Poly(lactic acid) (PLA) based Sustainable Materials for Durable Applications: Focus on Toughness and Heat Resistance. *ACS Sustainable Chemistry & Engineering*, 2016. **4**(6): p. 2899-2916
- [6] Ahmad, S.R., C. Xue, and R.J. Young, The mechanisms of reinforcement of polypropylene by graphene nanoplatelets. *Materials Science and Engineering: B*, 2017. 216(Supplement C): p. 2-9.
- [7] Jun, Y.-S., et al., Ultra-large sized graphene nano-platelets (GnPs) incorporated polypropylene (PP)/GnPs composites engineered by melt compounding and its thermal, mechanical, and electrical properties. *Composites Part B: Engineering*, 2018. **133**: p. 218-225.
- [8] Zakaria, M.R., et al., Comparative study of graphene nanoparticle and multiwall carbon nanotube filled epoxy nanocomposites based on mechanical, thermal and dielectric properties. *Composites Part B: Engineering*, 2017. **119**: p. 57-66.
- [9] Yao, H., S.A. Hawkins, and H.-J. Sue, Preparation of epoxy nanocomposites containing well-dispersed graphene nanosheets. *Composites Science and Technology*, 2017. 146: p. 161-168.
- [10] Xing, W., et al., Graphene oxide induced crosslinking and reinforcement of elastomers. *Composites Science and Technology*, 2017. 144: p. 223-229.
- [11] Xie, Z.-T., et al., New evidence disclosed for the engineered strong interfacial interaction of graphene/rubber nanocomposites. *Polymer*, 2017. 118: p. 30-39.
- [12] Malas, A., 6 - Rubber nanocomposites with graphene as the nanofiller, in *Progress in Rubber Nanocomposites*. 2017, Woodhead Publishing. p. 179-229.
- [13] Liu, C., S. Ye, and J. Feng, Promoting the dispersion of graphene and crystallization of poly (lactic acid) with a freezing-dried graphene/PEG masterbatch. *Composites Science and Technology*, 2017. 144: p. 215-222
- [14] Kang, H., et al., Fabrication of graphene/natural rubber nanocomposites with high dynamic properties through convenient mechanical mixing. *Composites Part B: Engineering*, 2017. 112: p. 1-7.
- [15] Habib, N.A., et al., Elastomeric Nanocomposite Based on Exfoliated Graphene Oxide and Its Characteristics without Vulcanization. *Journal of Nanomaterials*, 2017. 2017: p. 11.
- [16] Gao, Y., et al., Influence of filler size on the properties of poly(lactic acid) (PLA)/graphene nanoplatelet (GNP) nanocomposites. *European Polymer Journal*, 2017. 86: p. 117-131.
- [17] Bouakaz, B.S., et al., Organomontmorillonite/graphene-PLA/PCL nanofilled blends: New strategy to enhance the functional properties of PLA/PCL blend. *Applied Clay Science*, 2017. 139: p. 81-91.
- [18] Bijarimi, M., S. Ahmad, and A.K.M.M. Alam, Toughening effect of liquid natural rubber on the morphology and thermo-mechanical properties of the poly(lactic acid) ternary blend. *Polymer Bulletin*, 2017. 74(8): p. 3301-3317.