

PAPER • OPEN ACCESS

MHD Effect on Nano-Maxwell fluid with Cobalt nanoparticles passing over a Plate with Porous medium

To cite this article: Sidra Aman *et al* 2019 *J. Phys.: Conf. Ser.* **1366** 012047

View the [article online](#) for updates and enhancements.



IOP | ebooks™

Bringing you innovative digital publishing with leading voices to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of every title for free.

MHD Effect on Nano-Maxwell fluid with Cobalt nanoparticles passing over a Plate with Porous medium

Sidra Aman^{1,*}, Abid Hussanan², Zulkhibri Ismail^{3,*}, Mohd Zuki Salleh⁴

^{1,3,4}Applied and Industrial Mathematics Research Group, Centre for Mathematical Sciences, Universiti Malaysia Pahang, 26300 UMP Kuantan, Pahang, Malaysia

²Faculty of Mathematics and Statistics, Ton Duc Thang University, Ho Chi Minh City 700000, Vietnam

²Division of Computational Mathematics and Engineering, Institute for Computational Science, Ton Duc Thang University, Ho Chi Minh City 700000, Vietnam

*Corresponding author: ³Zulkhibri@ump.edu.my, ⁴Sidraaman9@gmail.com

Abstract: This article presents the study on the flow of Nano-Maxwell fluids with cobalt nanoparticles over a vertical plate in a porous medium. Free convection flow and magnetic effects are influencing the flow. The present problem is modelled in terms of PDE's with

boundary conditions. Non-dimensional variables are interposed to transform the governing equations into dimensionless form. The resulting equations are tackled via Laplace transform technique. Exact solutions are evaluated for velocity and temperature. These solutions are significantly controlled by some parameters involved. The present outcomes are compared with

previous published results and briefly explained. Increasing the amount of cobalt nanoparticles in the Maxwell fluid causes enhancement in the thermal conductivity, the viscosity forces tend to strengthen as the fluids becomes denser.

1. Introduction

Nanofluids are employed as heat transfer fluid due to their favorable thermal properties and hence are the source of attention for the researchers. Nanofluids are used in electric devices, power generators, Bio-medical industry for sensing and imaging purposes, transportation and medical treatments of many diseases. A very useful application of nanofluids is there in cancer imaging and drug delivery. Iron-based nanofluids are used to pass the drug particles to the tumor cells. Re-engineering the nanoparticles properties, they can be applied in almost any kind of disease treatment. Magnetite and Diamond particles are promising to destroy the undesired tissues in Nano-Cyrosurgery using freezing technique [1]. A review on nanofluids was carried out by Verma and Tiwari [2] regarding the progress of nanofluids implementations in solar collectors. They surveyed the literature of nanofluids on the basis of thermal conductivity enhancement, variation of specific heat capacity and viscosity with varying factors of nanoparticles such as size shapes and volume fractions. Nanofluids heat transfer flow for non-Newtonian fluids researches can be found in [3-6].



Exact solution for such problems was acquired by many researchers for different fluids and nanoparticles via Laplace transform technique [7]. Turkyilmazoglu [8] obtained the exact solution (Unique and double) for the problem of slip flow in nanofluids over a shrinking sheet.

Besides the analytical studies in the above area, a plenty of researches are embedded in the literature on numerical analysis of nanofluids via different techniques [9-13]. Flow of ferrofluid in a square cavity was investigated by Javed et al. [14] via Finite element method. They analysed that the strength of streamline circulation was maximized with Prandtl and Darcy numbers.

The above literature and our previous problem on Maxwell nanofluid Aman et al. [15] needs to be extended for oscillatory flow, porous media, magnetic effect and radiation effect. For the current analysis, the exact solution for oscillatory flow of Maxwell nanofluid with cobalt nanoparticles and kerosene oil is the main focus. The problem is tackled via Laplace transform method and Zakian technique for numerical Inverse Laplace transform. The results are plotted graphically using MathCAD and discussed.

2. Mathematical Formulation

Consider kerosene based Maxwell nanofluid with cobalt nanoparticles at rest over a vertical flat plate in (x, y) – plane under free convection. At first, having constant wall temperature T_∞ both the plate and fluid are static. At time $t = 0^+$, the temperature of the plate is upgraded to a constant value T_w and touches a value T_∞ . The fluid flows due to temperature gradient which produces buoyancy force. The governing equations are:

$$\rho_{nf} \left(1 + \lambda_1 \frac{\partial}{\partial t} \right) \frac{\partial u}{\partial t} = \mu_{nf} \frac{\partial^2 u}{\partial y^2} - \sigma_{nf} B_0^2 \left(1 + \lambda_1 \frac{\partial}{\partial t} \right) u(y, t) - \frac{\mu_{nf} \phi}{k} u(y, t) + \left(1 + \lambda_1 \frac{\partial}{\partial t} \right) (\rho\beta)_{nf} g (T - T_\infty), \quad (1)$$

$$(\rho c_p)_{nf} \frac{\partial T}{\partial t} = k_{nf} \frac{\partial^2 T}{\partial y^2}, \quad (2)$$

The BC's are:

$$\begin{aligned} u(y, 0) = 0, \quad u(0, t) = U_0 \cos \omega t, \quad u(\infty, t) = 0, \\ T(y, 0) = T_\infty, \quad T(0, t) = T_w, \quad T(\infty, t) = T_\infty. \end{aligned} \quad (3)$$

Interpolating the non-dimensional elements:

$$u^* = \frac{u}{U_0}, \quad y^* = \frac{yU_0}{\nu}, \quad t^* = \frac{tU_0^2}{\nu}, \quad \tau^* = \frac{\nu\tau}{\mu U_0^2}, \quad \theta = \frac{T - T_\infty}{T_\infty}, \quad (4)$$

After acquiring the non-dimensional partial differential equations, we employ the Laplace transform to equations (1)-(3):

$$A_1(1 + \lambda q)q\bar{u}(y, q) = A_2 \frac{\partial^2 \bar{u}(y, q)}{\partial y^2} - A_3(1 + \lambda q)M\bar{u}(y, q) - A_2 k \bar{u}(y, q) + A_4(1 + \lambda q)Gr\bar{\theta}(y, q), \quad (5)$$

$$\bar{u}(0, q) = \frac{q}{q^2 + \omega^2}, \quad \bar{u}(y, q) \rightarrow 0, y \rightarrow \infty.$$

$$A_6 \frac{\partial^2 \bar{\theta}(y, q)}{\partial y^2} - A_5 Pr q \bar{\theta}(y, q) + Q \bar{\theta}(y, q) = 0. \quad (6)$$

$$\bar{\theta}(0, q) = \frac{1}{q}, \quad \bar{\theta}(y, q) \rightarrow 0 \text{ at } y \rightarrow \infty.$$

Where

$$\lambda = \frac{\lambda_1 U_0^2}{\nu_f}, \quad Gr = \frac{\nu_f g \beta_f (T_w - T_\infty)}{U_0^3}, \quad Pr = \frac{(\mu c_p)_f}{k_f}, \quad M = \frac{\sigma_f B_0^2 \nu}{\rho_f U_0^2},$$

$$\gamma = \frac{\mu_f \phi \nu}{\rho_f k_1 U_0^2}, \quad A_1 = (1 - \phi) + \phi \left(\frac{\rho_s}{\rho_f} \right), \quad A_2 = \frac{1}{(1 - \phi)^{2.5}},$$

$$A_3 = \sigma_f \left[1 + \frac{3(\sigma - 1)\phi}{(\sigma + 2) - (\sigma - 1)} \right], \quad A_4 = (1 - \phi) + \phi \left(\frac{(\rho\beta)_s}{(\rho\beta)_f} \right),$$

$$A_5 = (1 - \phi) + \phi \frac{(\rho c_p)_s}{(\rho c_p)_f}, \quad A_6 = \frac{(k_s + 2k_f) - 2\phi(k_f - k_s)}{(k_s - 2k_f) + \phi(k_f - k_s)}, \quad (7)$$

The solutions of the equations (5) and (6) using transformed boundary conditions are:

$$\bar{\theta}(y, q) = \frac{1}{q} \exp\left(-y\sqrt{b_0}\sqrt{q-b_2}\right), \quad (8)$$

$$\bar{u}(y, q) = \frac{q}{q^2 + \omega^2} \exp\left(-y\sqrt{\{(\lambda q + 1)(\beta_0 q + \beta_1 M) + k\}}\right)$$

$$+ \frac{\beta_2(1 + \lambda q)Gr}{q[b_1 q + \{(\lambda q + 1)(\beta_0 q + \beta_1 M) + k\}]} \exp\left(-y\sqrt{\{(\lambda q + 1)(\beta_0 q + \beta_1 M) + k\}}\right)$$

$$- \frac{\beta_2(1 + \lambda q)Gr}{q[b_1 q + \{(\lambda q + 1)(\beta_0 q + \beta_1 M) + k\}]} \exp\left(-y\sqrt{b_0}\sqrt{q-b_2}\right). \quad (9)$$

Where

$$\beta_0 = \frac{A_1}{A_2}, \quad \beta_1 = \frac{A_3}{A_2}, \quad \beta_2 = \frac{A_4}{A_2}, \quad b_0 = \frac{A_5 Pr}{A_6}, \quad b_1^2 = \frac{Q Pr}{A_6}, \quad b_2 = \frac{b_1^2}{b_0}. \quad (10)$$

Using the inverse Laplace transform and convolution theorem, equations (8) and (9) emits:

$$\theta(y, t) = \operatorname{erfc}\left(\frac{y\sqrt{b_0}}{2\sqrt{t}}\right) \exp(b_0 t). \quad (11)$$

$$\begin{aligned}
 u(y,t) = & -\int_0^t \cos \omega(t - (\beta_0 + \lambda\beta_1 M)) \left[\frac{\exp\left[-y\left(\frac{\beta_0 + \lambda\beta_1 M}{\sqrt{\lambda\beta_0}}\right)\right] + \frac{y\sqrt{\lambda\beta_0^2}\sqrt{(\beta_0 + \lambda\beta_1 M)^2}}{2\lambda\beta_0} \exp\left(-\frac{\beta_0 + \lambda\beta_1 M}{\lambda\beta_0^2}(t-s)\right)}{\right] ds \\
 & + \beta_2 Gr \int_0^t \left[\cos \omega(t - (\beta_0 + \lambda\beta_1 M)) \right] \operatorname{erfc}\left(\frac{y\sqrt{b_0} \exp(b_2(t-s))}{2\sqrt{(t-s)}}\right) ds.
 \end{aligned} \tag{12}$$

3. Nusselt number

The Nusselt number is acquired as in [3]:

$$Nu = -\frac{k_{nf}}{k_f} \frac{\partial \theta}{\partial y} \Big|_{y=0} = A_6 k_f Re_x \left[\frac{\sqrt{b_0} e^{b_2 t}}{\sqrt{\pi t}} + \sqrt{b_0} \operatorname{erfc}(\sqrt{b_2 t}) \right]. \tag{13}$$

Where Re_x is the Reynold's number: $Re_x = \frac{xU_0}{\nu_f}$.

4. Limiting Case

The limiting case for the present problem is acquired by taking $M = 0$, $Q = 0$ and $k = 0$, we get the problem reduced to the previous published result in Aman et al. [15]:

$$A_1(1 + \lambda q) q \bar{u}(y, q) = A_2 \frac{\partial^2 \bar{u}(y, q)}{\partial y^2} + A_4(1 + \lambda q) Gr \bar{\theta}(y, q), \tag{14}$$

$$\bar{u}(y, q) = \frac{-b_1^2(\lambda q + 1)}{q^2[(\beta_0 \lambda q) + (\beta_0 - b_1)]} \exp(-y\sqrt{\beta_0 q(\lambda q + 1)}) + \frac{b_1^2(\lambda q + 1)}{q^2[(\beta_0 \lambda q) + (\beta_0 - b_1)]} \exp(-y\sqrt{b_1 q}), \tag{15}$$

$$u(y, q) = -\frac{b_1^2}{\beta_0 \lambda} \int_0^t h_1(t-s) f(y, s) ds + \frac{b_1^2}{\beta_0 \lambda} \int_0^t h(t-s) g(y, s) ds. \tag{16}$$

Where

$$\begin{aligned}
 F(y, q) &= \exp(-y\sqrt{\beta_0 q(\lambda q + 1)}) = \exp\left(-y\sqrt{\beta_0 \lambda} \sqrt{\left(q + \frac{1}{2\lambda}\right)^2 - \left(\frac{1}{2\lambda}\right)^2}\right), \\
 H(y, q) &= \exp(-y\sqrt{\beta_0 \lambda} \sqrt{q}), \quad G(q) = \frac{(\lambda q + 1)}{q^2 \left(q + \frac{\beta_0 - b_1}{\beta_0 \lambda}\right)}.
 \end{aligned} \tag{17}$$

And their Laplace Inverses are given as

$$h_1(y, t) = L^{-1} \{H(y, q)\} = \begin{cases} \frac{y\sqrt{\beta_0\lambda} \exp\left(-\frac{y^2\lambda\beta_0}{4t}\right)}{2t\sqrt{\pi t}}; & y > 0, \\ \delta(t); & y = 0 \end{cases}$$

$$f_1(y, t) = \left[h_1(y, t) + \frac{1}{2\lambda} \int_0^t h_1(y, z) \frac{z}{\sqrt{t^2 - z^2}} I_1\left(\frac{1}{2\lambda} \sqrt{t^2 - z^2}\right) dz \right] \exp\left(-\frac{1}{2\lambda} t\right) \quad (18)$$

$$= \left[\frac{y\sqrt{\beta_0\lambda}}{2t\sqrt{\pi t}} \exp\left(-\frac{y^2\beta_0\lambda}{4t} - \frac{1}{2\lambda} t\right) + \frac{1}{2\lambda} \exp\left(-\frac{1}{2\lambda} t\right) \int_0^t \frac{y\sqrt{\beta_0\lambda}}{2z\sqrt{\pi z}} \exp\left(-\frac{y^2\beta_0\lambda}{4z}\right) \frac{z}{\sqrt{t^2 - z^2}} I_1\left(\frac{1}{2\lambda} \sqrt{t^2 - z^2}\right) dz \right]$$

$$f(y, t) = L^{-1} \{F(y, q)\} = \begin{cases} f_1(y, t); & y > 0 \\ \delta(t); & y = 0 \end{cases}, \quad (19)$$

$$g(t) = \frac{a\lambda - 1}{a^2} H(t) + \frac{1}{a} t + \frac{1 - a\lambda}{a^2} \exp(-at), \quad \text{where } a = \frac{\beta_0 - b_1}{\beta_0\lambda}.$$

$$h(y, t) = L^{-1} \left\{ \exp\left(-y\sqrt{b_1}\sqrt{q}\right) \right\} = \begin{cases} \frac{y\sqrt{b_1} \exp\left(-\frac{y^2 b_1}{4t}\right)}{2t\sqrt{\pi t}} & ; y > 0, \\ \delta(t); & ; y = 0 \end{cases} \quad (20)$$

5. Results and discussion

The problem of magnetic effects on the flow of cobalt Nano-Maxwell fluid has been explored and tackled for various volume fraction values using Laplace transform technique.

The thermo-physical properties of cobalt nanoparticles and Kerosene oil are given in Table 1 as in Javed et al. [14]. These values have been used in coding while plotting the graphs. The quantity of physical interest of Nusselt number is established. The effect of Maxwell fluid parameter, λ and volume fraction, ϕ on velocity is depicted in Fig. 1.

Fig. 1 depicts the impact of volume fraction, ϕ of cobalt particles on velocity for range $0.01 \leq \phi \leq 0.04$. The velocity is found to be a decreasing function of volume fraction, ϕ . Increasing the amount of cobalt nanoparticles in the Maxwell fluid causes enhancement in the thermal conductivity, the viscosity forces tend to strengthen as the fluids becomes denser. Thus, the fluid velocity shows decreasing plots.

The variation of velocity in this case due to the varying values of Maxwell fluid parameter, λ has a tremendous importance as it effects the entire physical structure of the fluid. Fig. 2 shows the alteration of the flow of Maxwell nanofluid with λ . Gradually with a consistent behavior, the velocity increases for increasing various values of λ . This plot is mapped for the range, $0.01 \leq \lambda \leq 0.06$ and other ingrained constant parameters, $Gr = 1.6, M = 0.02, \phi = 0.03, k = 0.2$.

For the verification of present acquired results, the velocity equation [12] plot is compared with that of [15]. The result is found to be in consistency with previously established result which is shown in Fig. 3. This comparison is carried out for velocity solution with $M = 0, k = 0.00001$.

Table 1. Thermo-physical properties of cobalt and Kerosene oil. (Javed et al. [14]).

Model	$\rho(kg / m^3)$	$c_p(kg^{-1} / k^{-1})$	$\beta(k^{-1}) \times 10^{-5}$	$k(Wm^{-1}k^{-1})$
Cobalt	8900	420	21	100
Kerosene oil	997.1	4179	1.3	0.163

6. Conclusions

In this research paper, exact solution for flow of cobalt based Maxwell nanofluid is acquired using Laplace transform method. Increasing magnetic effects tends to decrease the flow velocity with a significant variation. Increasing values of Maxwell fluid parameter enhances the fluid velocity, the variation is more significant at $y = 1$. The results are in good agreement with previous results [15].

Figures

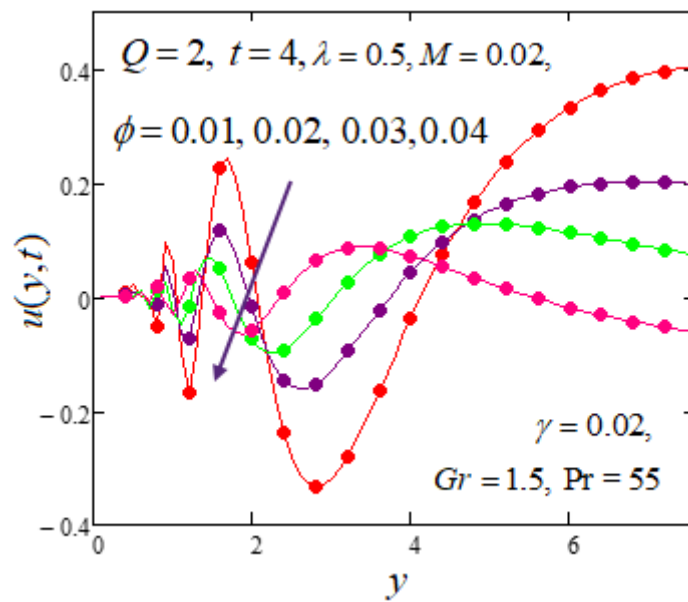


Figure 1: Velocity profiles for different values of volume fraction.

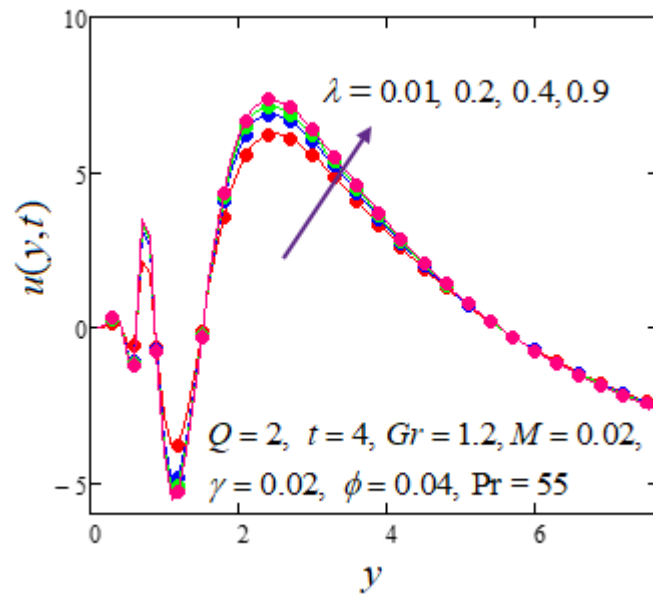


Figure 2: Velocity profiles for different values of Maxwell parameter.

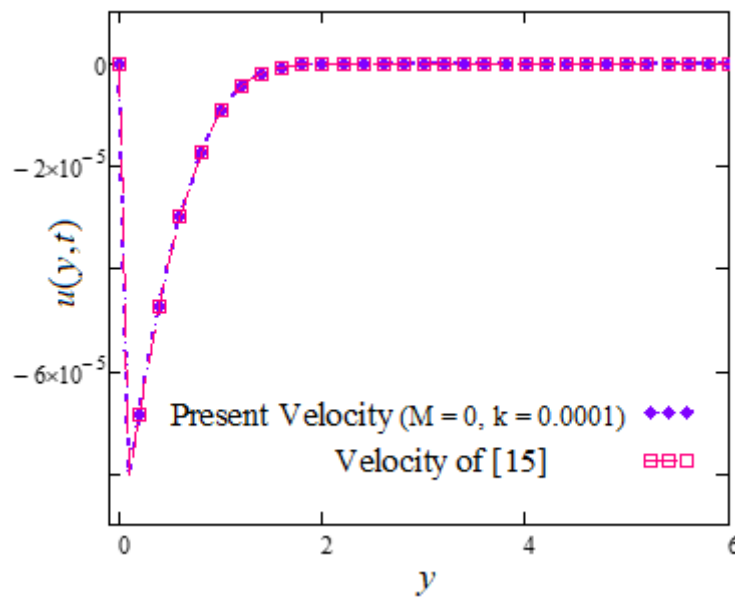


Figure 3: Comparison of present results with previous result [15].

Acknowledgement

The authors would like to acknowledge Universiti Malaysia Pahang for the financial support via vote numbers RDU170354 for this research.

References

[1] Wong K V and De Leon O. (2010). Applications of nanofluids: current and future. *Advances in mechanical engineering*, 2, 519659.

- [2] Verma S K and Tiwari A K. (2015). Progress of nanofluid application in solar collectors: a review. *Energy Conversion and Management*, 100, 324-346.
- [3] Aman S, Salleh M Z, Ismail Z and Khan, I. (2017, September). Exact solution for heat transfer free convection flow of Maxwell nanofluids with graphene nanoparticles. *In Journal of Physics: Conference Series*. 890, No. 1, 012004. IOP Publishing.
- [4] Hussanan A, Salleh M Z, Khan I, and Shafie, S. (2018). Analytical solution for suction and injection flow of a viscoplastic Casson fluid past a stretching surface in the presence of viscous dissipation. *Neural computing and applications*, 29(12), 1507-1515.
- [5] Aman S, Al-Mdallal Q and Khan I. (2018). Heat transfer and second order slip effect on MHD flow of fractional Maxwell fluid in a porous medium. *Journal of King Saud University-Science*.
- [6] Ul Haq R, and Aman S. (2019). Water functionalized CuO nanoparticles filled in a partially heated trapezoidal cavity with inner heated obstacle: FEM approach. *International Journal of Heat and Mass Transfer*, 128, 401-417.
- [7] Saqib M, Khan I, and Shafie S. (2019). Application of fractional differential equations to heat transfer in hybrid nanofluid: modeling and solution via integral transforms. *Advances in Difference Equations*, 2019(1), 52.
- [8] Turkyilmazoglu, M. (2012). Exact analytical solutions for heat and mass transfer of MHD slip flow in nanofluids. *Chemical Engineering Science*, 84, 182-187.
- [9] Abbasi F M, Shanakhat I, and Shehzad S A. (2019). Analysis of entropy generation in peristaltic nanofluid flow with Ohmic heating and Hall current. *Physica Scripta*, 94(2), 025001.
- [10] Ramesh G K, Gireesha B J, Hayat T and Alsaedi, A. Stagnation point flow of Maxwell fluid towards a permeable surface in the presence of nanoparticles. *Alexandria Engineering Journal*. 2016.
- [11] Kho Y B, Hussanan A, Sarif N M, Ismail Z, and Salleh M Z. (2018). Thermal Radiation Effects on MHD with Flow Heat and Mass Transfer in Casson Nanofluid over A Stretching Sheet. *In MATEC Web of Conferences* (Vol. 150, p. 06036). EDP Sciences.
- [12] Chandran P, Sacheti N C and Ashok S K. Natural convection near a vertical plate with ramped wall temperature. *Heat Mass Transfer*. 41, 459–464 (2005) DOI 10.1007/s00231-004-0568-7.
- [13] Sarif N M, Salleh, M Z, and Nazar R. (2013). Numerical solution of flow and heat transfer over a stretching sheet with Newtonian heating using the Keller box method. *Procedia Engineering*, 53, 542-554.
- [14] Javed, T, Mehmood Z, and Abbas Z. (2017). Natural convection in square cavity filled with ferrofluid saturated porous medium in the presence of uniform magnetic field. *Physica B: Condensed Matter*, 506, 122-132.
- [15] Aman S, Khan I, Ismail, Z, Salleh M Z, and Al-Mdallal Q. M. (2017). Heat transfer enhancement in free convection flow of CNTs Maxwell nanofluids with four different types of molecular liquids. *Scientific reports*, 7(1), 2445.
- [16] Halsted, D. J., & Brown, D. E. (1972). Zakian's technique for inverting Laplace transforms. *The Chemical Engineering Journal*, 3, 312–313. doi:10.1016/0300-9467(72)85037-8.