


Journal Pre-proof

Identifying and estimating solar cell parameters using an enhanced slime mould algorithm

Logeswaary A.P Devarajah, Mohd Ashraf Ahmad, Julakha Jahan Jui

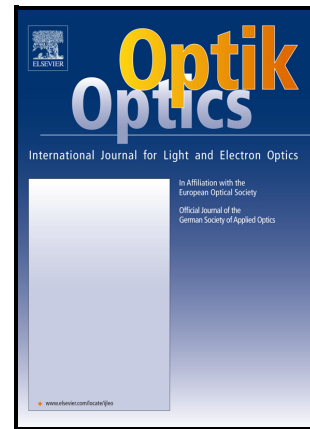

PII: S0030-4026(24)00289-4

DOI: <https://doi.org/10.1016/j.ijleo.2024.171890>

Reference: IJLEO171890

To appear in: *Optik*

Received date: 1 February 2024

Revised date: 13 May 2024

Accepted date: 26 May 2024

Please cite this article as: Logeswaary A.P Devarajah, Mohd Ashraf Ahmad and Julakha Jahan Jui, Identifying and estimating solar cell parameters using an enhanced slime mould algorithm, *Optik*, (2024)
doi:<https://doi.org/10.1016/j.ijleo.2024.171890>

This is a PDF file of an article that has undergone enhancements after acceptance, such as the addition of a cover page and metadata, and formatting for readability, but it is not yet the definitive version of record. This version will undergo additional copyediting, typesetting and review before it is published in its final form, but we are providing this version to give early visibility of the article. Please note that, during the production process, errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

© 2024 Elsevier GmbH. All rights are reserved, including those for text and data mining, AI training, and similar technologies.

Identifying and estimating solar cell parameters using an enhanced slime mould algorithm

Logeswaary A/P Devarajah¹, Mohd Ashraf Ahmad^{2,*}, Julakha Jahan Jui³

^{1,2,3}Faculty of Electrical and Electronics Engineering Technology, Universiti Malaysia Pahang

¹dlogeswaary@gmail.com, ²mashraf@ump.edu.my, ³julakha.ump@gmail.com

Abstract — This study proposed an enhanced slime mould algorithm (ESMA) for identifying the solar cells' parameters for five photovoltaic (PV) models, making two modifications to the original slime mould algorithm (SMA). The first modification was an arbitrary average position among the new individual position of slime and the best individual position of the slime mound currently found to resolve the issue of local optimum. Second, the tangent hyperbolic function of the formula p in the original SMA was replaced with an exponential function to create more variations for selecting the updated equation. The proposed ESMA was used to resolve the problem of estimating PV parameters based on the empirical current-voltage (I-V) data. Specifically, ESMA was evaluated on the parameter estimation in several photovoltaic models, i.e., the one-diode model (ODM), dual-diode model (DDM), and PV-module model (PMM). In general, ESMA outperformed the original SMA and other recent algorithms. Also, in order to provide a close approximation of the empirical I-V data of the real PV modules and cells, ESMA was able to determine the optimal parameter values for photovoltaic models.

Keywords: *Optimisation algorithms, PV models, Slime mould, Slime Mould Algorithm, Solar cell parameters.*

1. INTRODUCTION

The steady depletion of fossil fuels and the rapid rise in power consumption have caused an acute increase in the demand for electrical energy. As a result, the growth of alternative energy resources, particularly solar energy also increases correspondingly [1]. Many nations increased the installed photovoltaic (PV) capacity in 2016, according to a report from the International Energy Agency (IEA), and it appeared that this trend was continuing [2]. The use of PV systems to generate solar energy has drawn considerable attention worldwide since this system is free from emission, readily available, and simple to install [3]. The most crucial component of a PV system is the solar PV cell and module. Therefore, proper modelling of PV modules is essential for maximum performance [4].

In general, modelling the PV cells consists of two steps, starting with the design of its mathematical model, and following with the estimation of its parameter values. When developing a mathematical model, the current-versus-voltage (I-V) parameters that control a