

**BORANG PENGESAHAN STATUS TESIS**

JUDUL: **PENTAERYTHRITOL TETRADODECANOATE (PETD)  
PRODUCTION: A STUDY ON THE EFFECTS OF TEMPERATURE AND  
OPERATING TIME OF REACTION**

SESI PENGAJIAN: 2006/2007

Saya **MOHD IKHWAN BIN YUSOF**  
(HURUF BESAR)

mengaku membenarkan kertas projek ini disimpan di Perpustakaan Kolej Universiti Kejuruteraan & Teknologi Malaysia dengan syarat-syarat kegunaan seperti berikut:

1. Hakmilik kertas projek adalah di bawah nama penulis melainkan penulisan sebagai projek bersama dan dibiayai oleh KUKTEM, hakmiliknya adalah kepunyaan KUKTEM.
2. Naskah salinan di dalam bentuk kertas atau mikro hanya boleh dibuat dengan kebenaran bertulis daripada penulis.
3. Perpustakaan Kolej Universiti Kejuruteraan & Teknologi Malaysia dibenarkan membuat salinan untuk tujuan pengajian mereka.
4. Kertas projek hanya boleh diterbitkan dengan kebenaran penulis. Bayaran royalti adalah mengikut kadar yang dipersetujui kelak.
5. \*Saya membenarkan Perpustakaan membuat salinan kertas projek ini sebagai bahan pertukaran di antara institusi pengajian tinggi.
6. \*\*Sila tandakan (✓)

SULIT

(Mengandungi maklumat yang berdarjah keselamatan atau kepentingan Malaysia seperti yang termaktub di dalam AKTA RAHSIA RASMI 1972)

TERHAD

(Mengandungi maklumat TERHAD yang telah ditentukan oleh organisasi/badan di mana penyelidikan dijalankan)

TIDAK TERHAD

Disahkan oleh

(TANDATANGAN PENULIS)

Alamat Tetap:  
Lot 5843, Jalan Sekayu,  
Kg. Batu 24,  
21700 Kuala Berang,  
Terengganu Darul Iman.  
Tarikh: 27 NOVEMBER 2006

(TANDATANGAN PENYELIA)

**RUZINAH BINTI ISHA**  
Nama Penyelia

Tarikh:

CATATAN:

- \* Potong yang tidak berkenaan.
- \*\* Jika tesis ini SULIT atau TERHAD, sila lampirkan surat daripada pihak berkuasa/organisasi berkenaan dengan menyatakan sekali sebab dan tempoh tesis ini perlu dikelaskan sebagai SULIT atau TERHAD.
- ◆ Tesis dimaksudkan sebagai tesis bagi Ijazah Doktor Falsafah dan Sarjana secara penyelidikan, atau disertai bagi pengajian secara kerja kursus dan penyelidikan, atau Laporan Projek Sarjana Muda (PSM).

“Saya/Kami\* akui bahawa saya telah membaca karya ini dan pada pandangan saya/kami\* karya ini adalah memadai dari segi skop dan kualiti untuk tujuan penganugerahan Ijazah Sarjana Muda/Sarjana/Doktor Falsafah Kejuruteraan Kimia”

Tandatangan : .....

Nama Penyelia : Ruzinah Binti Isha

Tarikh : .....

*\* Potong yang tidak berkenaan*

**PENTAERYTHRITOL TETRADODECANOATE (PETD) PRODUCTION: A  
STUDY ON THE EFFECTS OF TEMPERATURE AND OPERATING TIME  
OF REACTION**

**MOHD IKHWAN BIN YUSOF**

A thesis submitted in fulfillment of the  
requirements for the award of the degree of  
Bachelor of Chemical Engineering

**Faculty of Chemical and Natural Resources  
Kolej Universiti Kejuruteraan dan Teknologi Malaysia**

**NOVEMBER 2006**

I declared that this thesis entitled “*Pentaerythritol Tetradodecanoate (PETD) Production: A study on the effects of temperature and operating time of reaction*” is the result of my own research except as cited in the references. The thesis has not been accepted for any degree and is concurrently submitted in candidature of any degree.

Signature : .....

Name of Candidate : MOHD IKHWAN BIN YUSOF

Date : 27 NOVEMBER 2006

To my beloved family, especially to my mother. Thanks Allah S.W.T for blessing me.

## **ACKNOWLEDGEMENT**

In preparing this thesis, there are many people who contributed towards understanding and moral support in my project progress. In particular, I would like to express a special thanks to Mdm Ruzinah Binti Isha for her encouragement, guidance, critics and tolerance to me as a supervisor. I am also thankful to Mr. Syaiful Nizam Bin Hassan for his advice and motivation. Without this continued support, this thesis would not have been the same as presented.

In this opportunity, I am also indeed indebted to all the lecturers in Faculty of Chemical Engineering and Natural Resources for their prop up during this project movement.

Lastly, I would like to thank to my colleagues and family members for their moral supports and suggestions.

## ABSTRACT

Pentaerythritol Tetradodecanoate (PETD) is a varnish additive that used in the magnetic wire coating. The esterification process is the main reaction in producing PETD. The raw materials to produce PETD are Pentaerythritol and Lauric Acid. The purification process of the raw materials is important before running the experiment to make sure the raw materials free from anything that debases, pollutes or contaminates. Sulfuric acid was used as a catalyst in the esterification between Pentaerythritol and Lauric acid. In this research, the thermodynamics study was carried based on the effect of operating and catalyst to the reaction. The dependent variables in the esterification to produce PETD are temperature and duration time of reaction. Otherwise, the independent variables are the amount of catalyst and reactants. This esterification was carried out at temperature between 180°C to 270°C and the duration time period of reaction between 8 hours to 24 hours. The reaction was conducted in the closed system batch reactor and the process was controlled in isothermal condition. The PETD that produced then was separated from water by using water distillation column. Then, the product was crystallized at the ambient temperature and the powder of PETD was obtained by crushing the crystal. The yield and color of the product were also observed. The product then was also analyzed using Thermogravimetric Analyzers (TGA). From the observation and analysis results, the optimum temperature and duration time of reaction was obtained at 220°C for 16 hours. Then, the result from the analysis was compared with the standard, Senox 410.

## ABSTRAK

Pentaerythritol Tetradodecanoate (PETD) adalah sejenis bahan pelindung yang digunakan di dalam lapisan wayar magnetik. Proses pengesteran adalah tindak balas utama yang digunakan untuk menghasilkan PETD. Bahan mentah yang digunakan untuk menghasilkan PETD adalah Pentaerythritol dan Asid Laurik. Proses penulenan atau pembersihan yang dilakukan pada bahan mentah adalah penting sebelum menjalankan eksperimen untuk memastikan bahan mentah tersebut bebas dari bahan tercemar atau kotor. Asid Sulfurik telah digunakan sebagai pemangkin di dalam tindak balas pengesteran diantara Pentaerythritol dan Asid Laurik. Di dalam kajian ini, kajian tentang termodinamik adalah berdasarkan kesan suhu tindak balas dan penggunaan pemangkin terhadap tindak balas. Pembolehubah bersandar di dalam pengesteran untuk menghasilkan PETD adalah suhu dan tempoh masa tindak balas. Manakala, pembolehubah tak bersandar adalah jumlah pemangkin dan bahan tindak balas. Tindak balas pengesteran ini berlaku pada suhu yang tinggi iaitu diantara 180 darjah Celcius hingga 270 darjah Celcius dan tempoh masa tindak balas diantara 8 jam hingga 24 jam. Tindak balas ini telah dijalankan di dalam sistem reaktor tertutup dan proses telah dikawal dalam keadaan isoterma. PETD yang terhasil kemudian telah dipisahkan daripada air dengan menggunakan proses penyulingan. Kemudian produk yang diperolehi telah dikristalkan pada suhu persekitaran dan serbuk PETD telah diperolehi dengan menghancurkan kristal tersebut. Jumlah hasil dan pemerhatian warna pada produk telah diperhatikan. Produk yang diperolehi kemudiannya telah dianalisis menggunakan Thermogravimetric Analyzers (TGA). Daripada pemerhatian dan keputusan analisis, suhu dan tempoh masa tindak balas yang optimum telah diperolehi iaitu pada 220 darjah Celcius untuk 16 jam. Kemudian, hasil daripada analisis yang dilakukan telah dibandingkan dengan yang telah sedia ada iaitu Senox 410.



**TABLE OF CONTENT**

<b>CHAPTER</b>	<b>TITLE</b>	<b>PAGE</b>
	<b>TITLE PAGE</b>	<b>i</b>
	<b>DECLARATION</b>	<b>ii</b>
	<b>DEDICATION</b>	<b>iii</b>
	<b>ACKNOWLEDGEMENT</b>	<b>iv</b>
	<b>ABSTRACT</b>	<b>v</b>
	<b>ABSTRAK</b>	<b>vi</b>
	<b>TABLE OF CONTENT</b>	<b>vii</b>
	<b>LIST OF TABLES</b>	<b>x</b>
	<b>LIST OF FIGURES</b>	<b>xi</b>
	<b>LIST OF ABBREVIATION</b>	<b>xiii</b>
<b>1</b>	<b>INTRODUCTION OF THE THESIS</b>	<b>1</b>
	1.1 Introduction	1
	1.2 Problem statement	2
	1.3 Objective of the thesis	3
	1.4 Scope of the thesis	3
<b>2</b>	<b>LITERATURE REVIEW OF THE THESIS</b>	<b>5</b>
	2.1 Esterification process	5

2.1.1	Introduction	5
2.1.2	The simple esterification	6
2.1.3	Esterification of PETD	7
2.2	Fischer esterification	8
2.3	Le Chatelier's Principle	12
2.4	Thermodynamics study of esterification	14
2.4.1	Introduction	14
2.4.2	Effect of Temperature	15
2.5	Effect of Catalyst	17
2.6	The Separation Process	17
2.7	Thermogravimetric Analyzers	19
2.7.1	Introduction	19
<b>3</b>	<b>METHODOLOGY</b>	<b>21</b>
3.1	Introduction	21
3.2	Material	23
3.2.1	Raw Material Preparation	23
3.2.2	Catalyst Preparation	23
3.3	Experimental Setup	23
3.4	Experimental Work	24
3.4.1	Reaction Condition	25
3.4.2	Separation Process	27
3.4.3	Drying Process	27
3.5	Analysis Data	28
3.5.1	Yield of Product	28
3.5.2	Using Thermogravimetric Analyzers	29

<b>4</b>	<b>EXPECTED RESULT</b>	<b>30</b>
4.1	Introduction	30
4.2	Analysis Process	30
4.3	Esterification of Lauric acid with Pentaerythritol On Different Temperature	36
4.3.1	Effect of temperature to produce PETD for 8 hours	36
4.3.2	Effect of temperature to produce PETD for 16 hours	37
4.3.3	Effect of temperature to produce PETD for 24 hours	38
4.4	Analysis using Thermogravimetric Analyzers	39
4.4.1	Analysis Result for Standard PETD	39
4.4.2	Analysis Result of PETD for 220°C And 16 hours	40
<b>5</b>	<b>CONCLUSION</b>	<b>42</b>
5.1	Conclusion	42
5.2	Recommendation	42
	<b>REFERENCES</b>	<b>44</b>

**LIST OF TABLES**

<b>TABLE NO.</b>		<b>TITLE</b>
<b>PAGE</b>		
	3.1	Experiment schedule
26		
	4.1	The summary for overall yield of PETD produced
31		
	4.2	The color observation of PETD produced
32		

**LIST OF FIGURES**

<b>FIGURE NO</b>	<b>TITLE</b>	<b>PAGE</b>
2.1	Graph number of molecules versus energy	16
3.1	The process flow of methodology	22
3.2	Simple batch distillation column	24
3.3	Simple distillation column	27
3.4	The powder of PETD	28
3.5	Thermogravimetric Analyzers (TGA)	29
4.1	White color of PETD	33
4.2	Slightly yellowish color of PETD	34
4.3	Dark yellow color of PETD	34
4.4	Brown color of PETD	35
4.5	Dark brown color of PETD	35
4.6	The effect of temperature for 8 hours duration time of reaction	36
4.7	The effect of temperature for 16 hours duration time of reaction	37
4.8	The effect of temperature for 24 hours duration time of reaction	38
4.9	The standard PETD analysis	40
4.10	The analysis of PETD at the temperature of 220°C	

and 16 hours duration time

41

**LIST OF ABBREVIATION**

<b>PETD</b>	Pentaerythritol tetradodecanoate
<b>LA</b>	Lauric acid
<b>PET</b>	Pentaerythritol
<b>H<sub>2</sub>SO<sub>4</sub></b>	Sulfuric acid
<b>TGA</b>	Thermogravimetric Analyzers

## CHAPTER 1

### INTRODUCTION

#### 1.1 Introduction

Pentaerythritol Tetradodecanoate (PETD) is a varnish additive that used in the magnetic wire coating for a few years ago. Varnish additive is a finish applied to wood or other surfaces in order to provide a clear, hard, durable and protective finish. Besides that, there are many other applications of varnish such as an additive for paints. PETD is widely used by company in Malaysia such as Kaneka (M) Sdn. Bhd and Samsung. PETD was produced by Fischer esterification process. The raw materials used in esterification process are Lauric acid and Pentaerythritol.

Commonly, the optimum temperature and duration time of reaction for the reversible esterification process between Lauric acid with Pentaerythritol that produce PETD and water were investigated. This reaction of esterification occurs at higher temperature between 180°C - 270°C and at pressure of 1 atm. The reaction rate for the esterification is a function of process temperature. The reaction rate was increased with the increase of the operating temperature. The dependent variables in the esterification to produce PETD are temperature and duration time of reaction. Otherwise, the independent variables are the amount of catalyst and reactants. These variables were manipulated in the reaction to get the optimum product in terms of purity. In addition, the duration time period to produce PETD is between 8 hours to 24 hours. The reaction was conducted in the closed system batch reactor equipped with stirrer and condenser. The products that produced were analyzed using Thermogravimetric Analyzers (TGA).



Esterification is a general name for a chemical reaction between carboxylic acid with alcohol to produce an ester and water. Carboxylic acids react with alcohols to form esters through a condensation reaction. Esterification is a reversible reaction process occurred when all phases are in same equilibrium. Therefore, distillation process is an answer for esterification of PETD but it is not efficient because of limitation in equilibrium.

In this research, the thermodynamics study is an important to know about the thermodynamic variables, thermodynamic systems, and the effect of temperature to the reaction rate. The esterification of PETD is the new technology that already used in other country but not localized in Malaysia. So, the cost to import the PETD is very expensive from the others country.

## **1.2 Problem Statement**

In this research, there are several problems that have been identified. The esterification of PETD is the new technology that already used in other country but not localized in Malaysia. So, the cost to import the PETD is very expensive from the outside. The challenge is to localize the production of PETD in our country in case to reduce the cost of import the PETD from others country. However, the local companies such as Kaneka (M) Sdn. Bhd and Samsung still has not known the technology to produce the PETD at an optimum output in terms of purity, production rate, energy consumption and process minimization.

The duration time of reaction to produce PETD is higher between 8 hours to 24 hours. In the industry such as Kaneka (M) Sdn Bhd, they produce PETD at the optimum duration time of 24 hours. Sulfuric acid was used commonly as the catalyst in the reaction in order to reduce the duration time period of reaction lower than 24 hours.

The temperature of reaction to produce PETD is high between 180°C to 270°C at 1atm. The energy needed for the esterification to produce PETD is higher. In the lab scale experiment to produce PETD, the problem is to maintain the temperature of the reaction at constant value. This is because the heat inside the heating medium was transferred to the surroundings.

The low purity of PETD was produced because the product still contains the small amount of Lauric acid and Pentaerythritol. That was most probably because the Lauric acid and Pentaerythritol not completely reacted with each other in the reaction. The small amount of the reactants that contained in the product must be reduced to get the higher purity of product. The stirrer was used in the reaction to make sure the reactants were completely reacting with each others.

### **1.3 Objective**

The main objective of this research is to study the effects of temperature and catalyst application to the reaction to produce Pentaerythritol Tetradodecanoate (PETD).

### **1.4 Scope**

In order to achieve the objective, four scopes have been identified in this research. The first scope is catalyst preparation. Sulfuric acid is very concentrated liquid and must be diluted with distilled water. This approach is important step before the catalyst mixed with reactants because the high concentrated catalyst can affect the purity of the product.

The second scope is the experimental set up. This experiment was conducted in closed system batch reactor equipped with stirrer and condenser. The heating

mantle used as the heating medium to heat the reaction in the reaction flask set. The distillation column was connected to reaction flask set to remove water from the reaction. The condenser with cooling water was connected to distillation column to condense the water. The receiving flask used to collect the water produced from the reaction. The stirrer was used to stir the mixture of the reactants.

The third scope is the experimental work. The experiments were running with different temperatures and duration time of reaction. Pentaerythritol and Lauric acid were mixed together in the batch reactor. Then, the mixture was heated by using heating mantle up to the temperature range between 180°C to 270°C. The temperature of the reaction will be manipulated at different value for different experiments that running. The reaction time of the experiment is between 8 hours to 24 hours. The optimum temperature will be investigated based on the reaction rate and the conversion of the product.

The last scope is the analysis product via Thermogravimetric Analyzers (TGA). TGA was used to analysis the composition of PETD that contained in the product. The type of TGA used to analysis the product is Q500.

## CHAPTER 2


### LITERATURE REVIEW

#### 2.1 Esterification Process


##### 2.1.1 Introduction

Carboxylic acids react with alcohols to form esters through a condensation reaction known as esterification (Solomons and Fryhle, 2003). The alcohol and carboxylic acid react to form the ester and a water molecule. Esters were produced when carboxylic acids were heated with alcohols in the presence of an acid catalyst. The reactions proceed very slowly in the absence of strong acids (Solomons and Fryhle, 2003). Solomons and Fryhle also described that the reaction reach the equilibrium within a matter of a few hours when an acid and an alcohol are refluxed with a small amount of concentrated sulfuric acid. The Sulfuric acid was commonly used as the acid catalyst in the reaction. In organic chemistry, an acid catalyst is a compound that was used to donate protons. Usually this is done to create a more likely leaving group, such as converting an  $\text{OH}^-$  to a  $\text{H}_2\text{O}$ . The ester was formed when dehydration occurs in the reaction. Since an esterification is equilibrium limited reaction, full conversion is not possible unless one of the products was removed (Nijhuis *et al*, 2002). Water that was produced in the reaction must be removed to keep the higher purity of product produced.

The equation for the general reaction between carboxylic acid, RCOOH and an alcohol, R'OH (where R and R' can be the same or different) is shown in Equation 2.1.

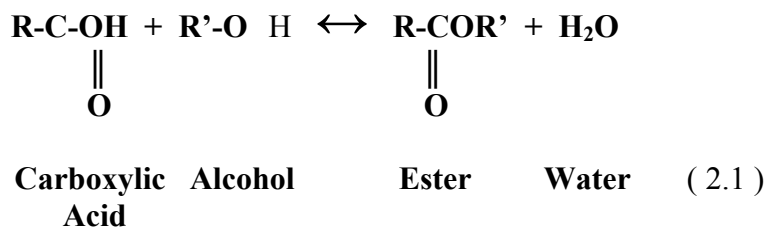

For simple example, we consider the esterification of ethyl ethanoate from ethanoic acid and ethanol shown in Equation 2.2.

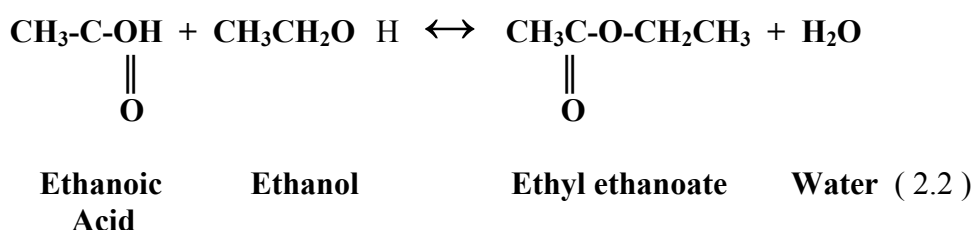


### 2.1.2 The simple esterification

In the esterification process, there is a simple esterification process to make an ester. Carboxylic acids and alcohols are often warmed together in the presence of a few drops of concentrated Sulfuric acid in order to observe the smell of the esters formed (Jim Clark, 2003). Because the reactions are slow and reversible, the ester that produced is lower in this time. The smell is often masked or distorted by the smell of the carboxylic acid. A simple way of detecting the smell of the ester is to pour the mixture into some water in a small beaker (Jim Clark, 2003). Esters are virtually insoluble in water and tend to form a thin layer on the surface. Excess acid and alcohol both dissolve and are tucked safely away under the ester layer. Small esters like ethyl ethanoate smell like typical organic solvents. Larger esters tend to form more slowly than the smaller ester (Jim Clark, 2003).

### 2.1.3 Esterification of Pentaerythritol Tetradodecanoate

The esterification of Pentaerythritol Tetradodecanoate (PETD) was produced from the reaction between Lauric acid and Pentaerythritol (Nurul Aini, 2005). Equation 2.3 shows the esterification reaction between Lauric acid and Pentaerythritol using Sulfuric acid as the catalyst (Eliefiyonna, 2005).

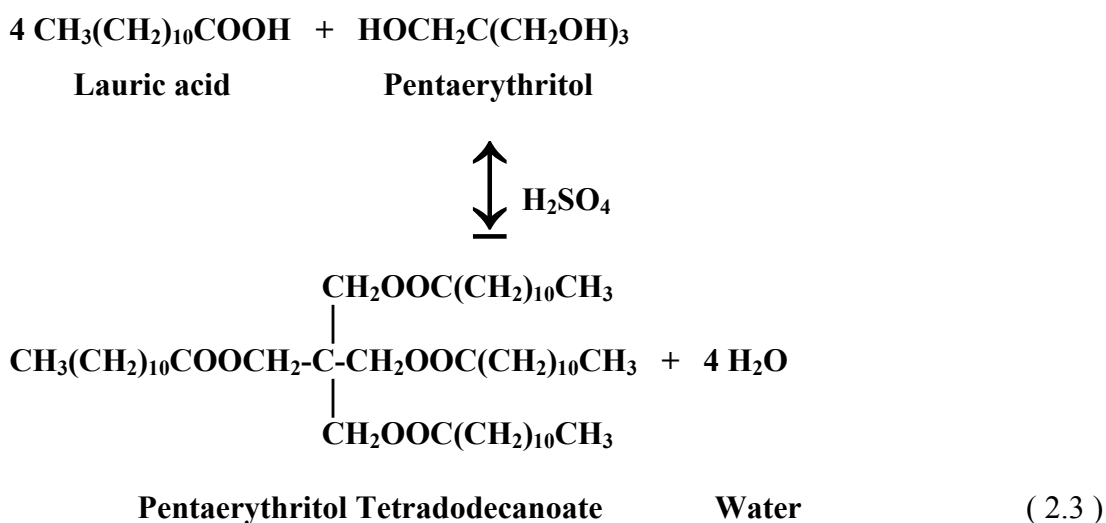

Equation 2.3 clearly shows that the esterification reaction between 1 mole of Lauric acid react with 4 moles of Pentaerythritol to produce 1 mole of PETD and 4 moles of water. Lauric acid is a medium-chain saturated fatty acid with 12 carbons and no double bonds which is also known as decanoic acid (Carey, 2000). Lauric acid has a systematic name of dodecanoic acid, a shorthand designation of C<sub>12:0</sub>, and a molecular weight of 200.3 g/mol (Wu *et al*, 1995). Pentaerythritol is a tetrahydric neopentyl alcohol (Carey, 2000). It is an odorless white, crystalline, solid compound, non hygroscopic, practically non-volatile and stable in air. The Pentaerythritol is principally used in the surface coating industries (Kaewthong *et al*, 2003).


The purpose of using catalyst in the reaction is to lower down the temperature and duration time of the reaction. The reactions proceed very slowly in the absence of strong acids to reach equilibrium (Solomons and Fryhle, 2003). The production

reaction involving the mixture of Lauric acid and Pentaerythritol substrates occurred at the range between 150°C to 300°C (Kamal *et al*, 2005). In this research, the temperature range for the esterification reaction is higher between 180°C to 270°C. The higher temperature is needed for this reaction based on the melting point of Pentaerythritol which is the melting point is 260.5°C. The duration time of reaction for producing PETD is higher between 8 hours to 24 hours (Kamal *et al*, 2005).


## 2.2 Fischer Esterification

Fischer esterification is a special type of esterification and the process of forming an ester by refluxing a carboxylic acid and an alcohol in the presence of an acid catalyst as Scandium triflate as an acid catalyst (Solomons and Fryhle, 2003). Carboxylic acids are strong organic acids. Because acid-base reactions proceed rapidly, any nucleophile that is also a strong base will react with a carboxylic acid by removing a proton first before any nucleophilic substitution reaction can take place (Janice, 2006).


The general form of Fischer esterification mechanism was described is as follows:

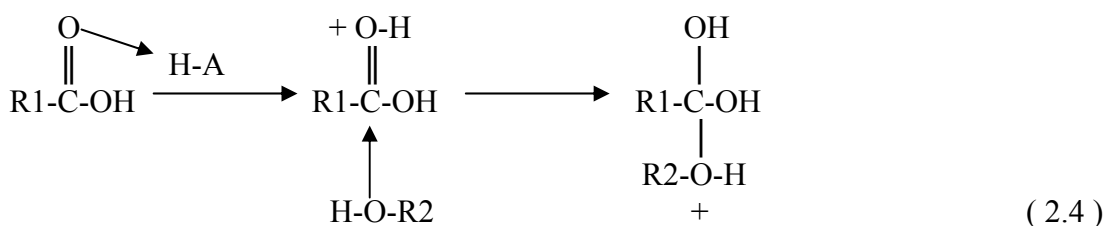

Equation 2.4 shows that the proton transfer from acid catalyst to carbonyl oxygen that was increased the electrophilicity of carbonyl carbon. Then the carbonyl carbon is then attacked by the nucleophilic oxygen atom of the alcohol and lead to the formation of an oxonium ion.

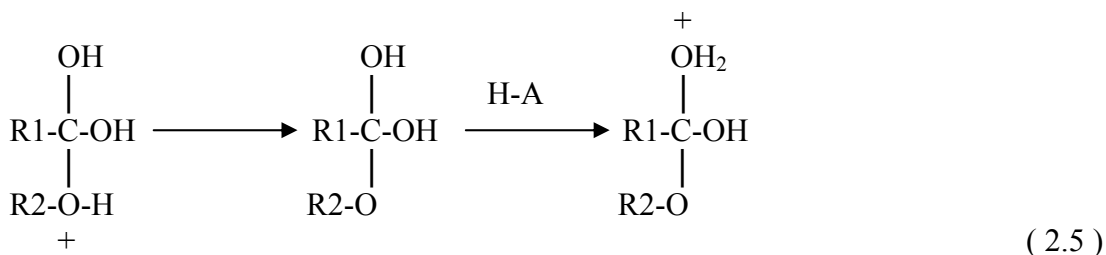

Equation 2.5 clearly shows that the proton transfer from the oxonium ion to a second molecule of the alcohol gives an activated complex. Then the proton transfers from one of the hydroxyl groups of the activated complex gives a new oxonium ion.

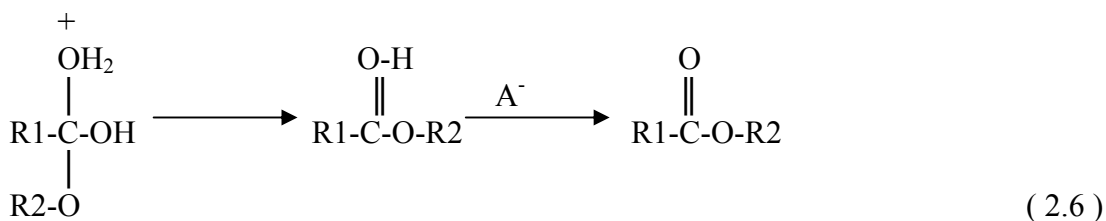


Equation 2.6 shows that the mechanism was followed by loss of water from the oxonium ion as electrons from the alcohol oxygen to form water and ester. Loss of a proton yields the ester.

For a typical example of Fisher esterification process, considered the formation of ethyl ethanoate from ethanoic acid and ethanol. Ethanoic acid reacts with ethanol in the presence of concentrated sulfuric acid as a catalyst to produce the ethyl ethanoate. The reaction is slow and reversible. In order to reduce the chances of the reverse reaction occurs, the ester was distilled off as soon as it was formed. All the steps in the mechanism are shown as one-way reactions because it makes the mechanism look less confusing. The reverse reaction is actually done sufficiently differently that it affects the way of the mechanism. The mechanism for the formation of ethyl ethanoate was described in detailed is as follows.





In the first step, the ethanoic acid takes a proton (a hydrogen ion) from the concentrated sulfuric acid. The proton becomes attached to one of the lone pairs on the oxygen which is double-bonded to the carbon as shown in Equation 2.7.

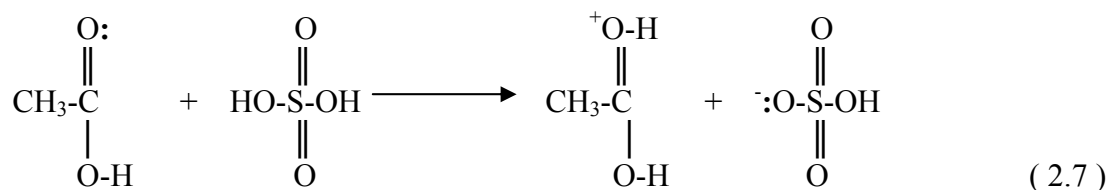


The transfer of the proton to the oxygen gave it a positive charge but it is actually misleading to draw the structure in this way.

The positive charge was delocalized over the whole of the right-hand end of the ion with a fair amount of positive on the carbon atom as shown in Equation 2.8.

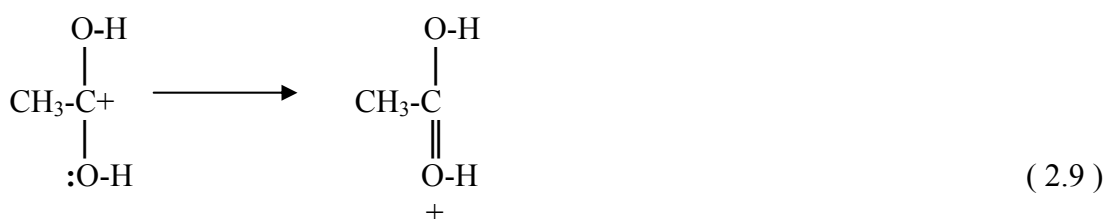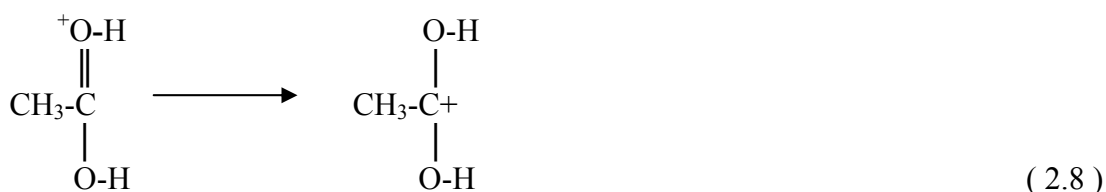


Equation 2.9 shows the way of writing the delocalized structure of the ion.


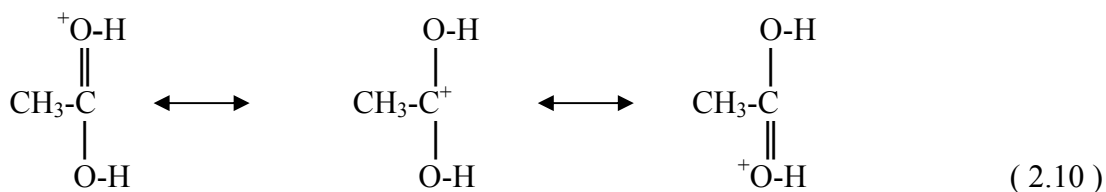


Equation 2.10 shows the double headed arrows described that each of the individual structures makes a contribution to the real structure of the ion. The various structures are known as resonance structures or canonical forms. There is some degree of positive charge on both of the oxygen atoms and also on the carbon atom. Each of the bonds between the carbon and the two oxygen will be the same that is somewhere between a single bond and a double bond.

Equation 2.11 shows the positive charge on the carbon atom was attacked by one of the lone pairs on the oxygen of the ethanol molecule.

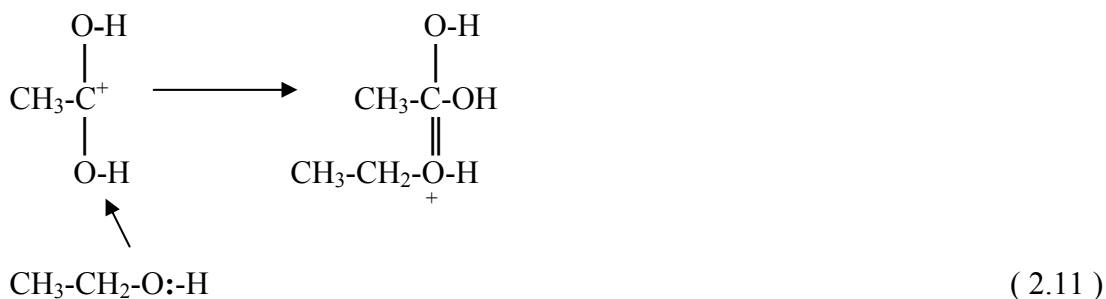


Equation 2.12 clearly shows that a proton (a hydrogen ion) was transferred from the bottom oxygen atom to one of the others. It gets picked off by one of the other substances in the mixture and then dumped back onto one of the oxygen more or less at random.

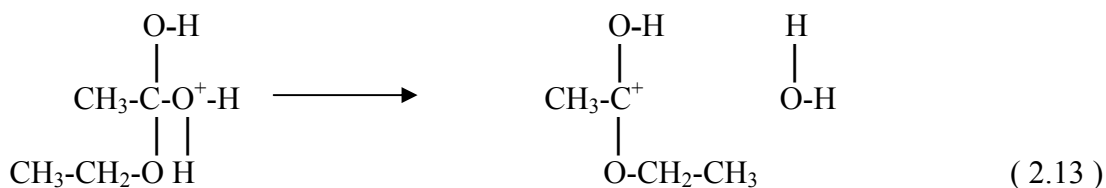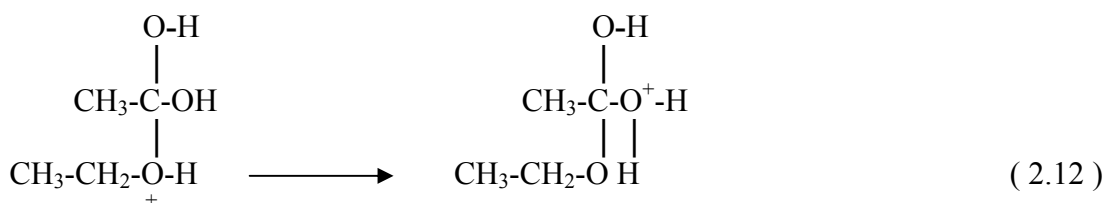


Equation 2.13 shows the molecule of water that was lost from the ion. The product ion has been drawn in a shape to reflect the products which are finally getting quite close to.

Equation 2.14 shows the structure for the latest ion. The positive charge is actually delocalized all over that end of the ion and there is also being contributions from structures where the charge is on the either of the oxygens:

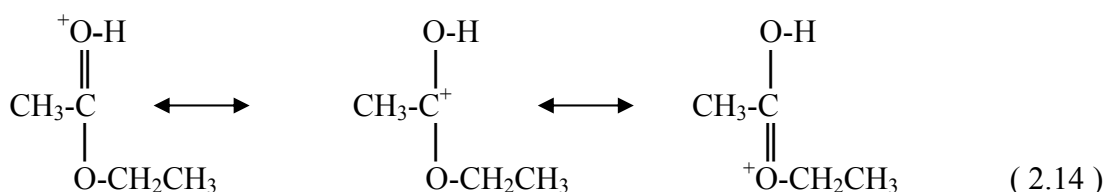

Equation 2.15 shows that the hydrogen was removed from the oxygen by reaction with the hydrogensulphate ion which was formed way back in the first step.

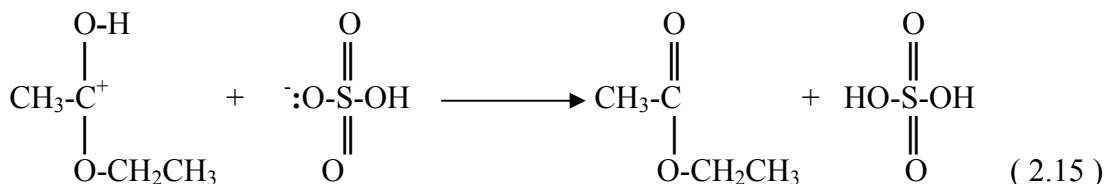

The ester has been formed and the sulfuric acid catalyst has been regenerated.

### 2.3 Le Chatelier's Principle

Le Chatelier's principle states that if a dynamic equilibrium is disturbed by changing the conditions, the position of equilibrium moves to counteract the change (Janice, 2006). Thus, removing a product from a reaction mixture as it is formed drives the equilibrium to the right, forming more products. The effect of different temperature to the reversible reaction was investigated. By using Le Chatelier's

principle, the change of temperature was affected the reaction. In the esterification between Lauric acid and Pentaerythritol, heat was absorbed during the reaction. Le Chatelier's principle can be used to favor products in dehydration reactions because the water product has a lower boiling point than the alcohol and carboxylic acid reactant. Thus, the water can be distilled from the reaction mixture as it is formed, leaving the alcohol and acid to react further, forming more product. For simple example, consider the following reaction in exothermic (heat is evolved):



Equation 2.16 shows that 250 kJ was evolved (hence the negative sign) when 1 mole of A reacts completely with 2 moles of B. For reversible reactions, the value is always given as if the reaction was one-way in the forward direction. The back reaction (the conversion of C and D into A and B) would be endothermic by exactly the same amount.

According to Le Chatelier's principle, if the temperature of the reaction is increase, the position of equilibrium was moved in such a way as to counteract the change (Jim Clark, 2003). That means that the position of equilibrium was also moved so that the temperature was reduced again. If the system is in equilibrium at 300°C and the temperature was increased to 500°C. To cool down this temperature, it needs to absorb the extra heat in the reaction. The back reaction absorbs heat. The position of equilibrium therefore moves to the left. The new equilibrium mixture contains more A and B, and less C and D.



←  
The position of equilibrium moves to  
the left if the temperature is increase

If the condition was changed by decreasing the temperature, for example the system is in equilibrium at 500°C and the temperature was reduced to 400°C. The reaction tends to heat itself up again to return to the original temperature. The

position of equilibrium moves to the right. More A and B were converted into C and D at the lower temperature.



$\xrightarrow{\hspace{10em}}$   
 The position of equilibrium moves  
 to the right if temperature is decrease

As the conclusion, if the temperature of a system was increased in dynamic equilibrium favours the endothermic reaction. The system counteracts the change by absorbing the extra heat. If the temperature of a system was decreased in dynamic equilibrium favours the exothermic reaction. The system counteracts the change by producing more heat.

## 2.4 Thermodynamics study of esterification


### 2.4.1 Introduction

Thermodynamics (from the Greek *thermos* meaning heat and *dynamis* meaning power) is a branch of physics that studies the effects of changes in temperature, pressure and volume on physical systems (Cengel and Boles, 2002). The study of the laws that govern the conversion of energy from one form to another, the direction in which heat will flow, and the availability of energy to do work. It is based on the concept that in an isolated system anywhere in the universe there is a measurable quantity of energy called the internal energy ( $U$ ) of the system. This is the total kinetic and potential energy of the atoms and molecules of the system of all kinds that can be transferred directly as heat; it therefore excludes chemical and nuclear energy. The value of  $U$  can only be changed if the system ceases to be isolated (Cengel and Boles, 2002). In these circumstances  $U$  can change by the transfer of mass to or from the system, the transfer of heat, or by work being done. One of the most fundamental laws of nature is the conservation of energy principle

(Smith *et al*, 2001). It states that during an interaction, energy can change from one form to another but the total amount of energy remains constant.

#### **2.4.2 Effect of Temperature**

The reaction rate constants for the esterification are a function of process temperature and were increased with the increase of the temperature (Liu and Chen, 2002). The accelerating of the reaction rate constant with the increase of the temperature for the forward reaction was faster than the backward process. So, water production rate was higher in a higher temperature than in a lower temperature. In this research, the temperature of the reaction is between 180°C to 270°C. The higher temperature was needed to the reaction between Lauric acid and Pentaerythritol to remove water in the higher quantity. Kinetic theory says that molecules are in constant motion (Jim Clark, 2003). The velocity of the molecules is directly proportional to the Kelvin temperature. The kinetic energy and molecule velocity increase with temperature. Reactions usually require collisions between reactant molecules or atoms (Jim Clark, 2003). The formation of bonds requires atoms to come close to one another. New bonds can form only if the atoms are close enough together to share electrons. Some collisions are not successful. These are called ineffective collisions. The particles simply hit and then rebound. Collisions that lead to products are called effective collisions. An effective collision must happen with a great enough speed, energy and force to break bonds in the colliding molecules. Collisions between molecules are more violent at higher temperatures (Smith *et al*, 2001). The higher temperatures mean higher velocities. This means there are less time between collisions. The frequency of collisions was increased. The increased number of collisions and the greater violence of collisions results in more effective collisions. The rate for the reaction increases. Reaction rates are roughly doubled when the temperature increases by 10 degrees Kelvin (Jim Clark, 2003). This means the rate can be quadrupled if the temperature was raised by 20 degrees Kelvin.

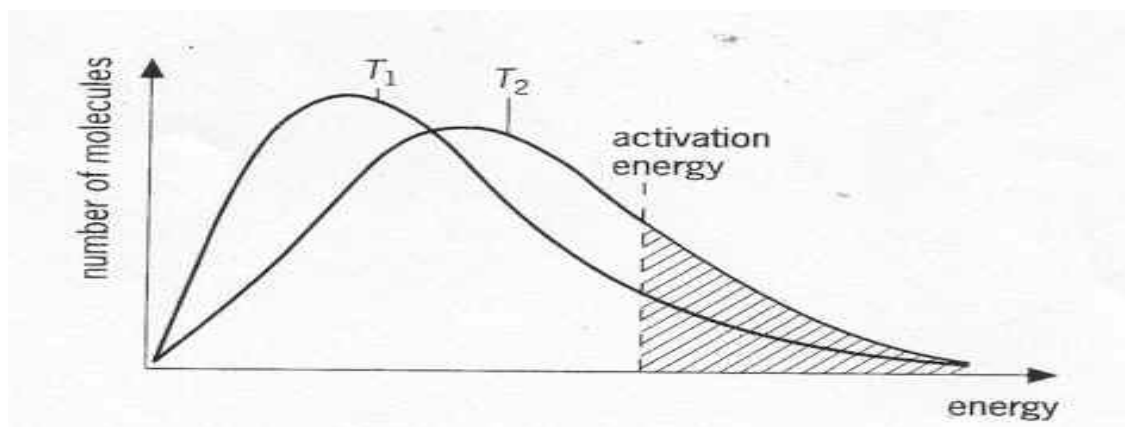

**Figure 2.1:** Graph number of molecules versus energy

The effect of temperature to the activation energy of reaction is shown in Figure 2.1. From the figure 2.1 above, two distribution curves are shown for a lower,  $T_1$  and higher temperatures,  $T_2$  and it was assumed that the area under the curve is the same for both temperatures i.e. the same number and population of molecules. Comparing lower temperature,  $T_1$  with higher temperature,  $T_2$  as the temperature increases, the peak for the most likely kinetic energy, KE was reduced and more significantly moves to the right to a higher value so there are more particles with the highest values of energy.

Now, consider the activation energy,  $E_a$  and the minimum KE the particles must have to react via e.g. bond breaking, the fraction of the population able to react at  $T_1$ . However, at the higher temperature  $T_2$ , the fraction with enough KE to react is given by the combined two areas under a curve of  $T_1$  and  $T_2$ . Therefore, because of the shift in the distribution, at a higher temperature, a greater fraction of particles has the minimum KE to react. A relatively small change in temperature can have quite dramatic effect on the small, but significant, population of very high KE molecules; hence a relatively small change in temperature can significantly change the speed of a reaction. A reaction kinetic model was needed to describe the thermal reaction course over a wide temperature range (Bohm *et al*, 2000)

## 2.5 Effect of Catalyst

In the esterification process, the acid-catalyst was used to increase the reaction rate and to lower down the temperature of the reaction. If the reaction rate was increased, the duration time of the reaction to reach the equilibrium was also decreased. The energy needed for the reaction was also decreased because the lower activation energy of the reaction. The esterification process is both slow and reversible reaction (Solomons and Fryhle, 2003). The reaction was reached the equilibrium within a matter of a few hours when an acid and an alcohol were refluxed with a small amount of concentrated sulfuric acid or hydrogen chloride.

The variation of both forward and backward reaction rate occurred during the change of the concentrations of catalyst (Liu and Chen, 2002). The water production rate was higher for a higher concentration of catalyst since the forward reaction rate constant was higher than the backward one. The water contents in the reactor were higher for a higher concentration of catalyst for a period at the beginning during the reaction and then were lower later (Liu and Chen, 2002). Steric factors strongly affect the rates of acid-catalyzed hydrolysis of esters (Janice, 2006). Large groups near the reaction site, whether in the alcohol component or the acid component, slow both reactions markedly.

## 2.6 The separation process

The separation process known as distillation is a method for separating the various components of a liquid solution which depends upon the distribution of these components between a vapor phase and a liquid phase (Geankoplis, 2003). In this study, the reaction of PETD was produced in the batch reactor. The water that was produced in the batch reactor must be keep remove to get the best purity of product. The distillation process was used to keep remove water from the mixture. Distillation is a laboratory technique used for separating and purifying liquids. Distillation works by exploiting the different boiling temperatures of liquids



(Geankoplis, 2003). The more volatile liquid (the liquid with the lower boiling point) is typically evaporate first and the vapor will pass into a condensing column, where it can revert into a liquid (condense) on the cool glass where it trickles into a collection flask. Heating further was caused the less volatile liquids to evaporate and distill at higher temperatures. The two main kinds of distillation are simple distillation and fractional distillation, and both are used widely.

In the methodology of this research, a simple distillation apparatus consists of a boiling flask (reaction flask set) attached to an adapter holding a thermometer (to determine the boiling temperature of the liquid). The adapter connects to a condenser into which cold water is constantly passed through. The condenser leads into a collection flask for the purified liquid. Distillation is probably the most common technique for purifying organic liquids (Jim Clark, 2003). In simple distillation, a liquid was boiled and the vapors work through the apparatus until they reach the condenser where they were cooled and condense into liquid. Liquids were separated based upon their differences in boiling point (Geankoplis, 2003). Two important things to note, first is the tip of the thermometer must be correctly positioned slightly below the center of the condenser to accurately reflect the temperature of the vapors and second is the water supply should be connected to the lower port in the condenser and the drainage tube connected to the upper. Also be sure to use the thin-walled tubing and not the heavy walled vacuum tubing.

Fractional distillation is essentially the same as simple distillation except that a fractionating column was placed between the boiling flask and the condenser. The fractionating column is usually filled with glass or plastic beads. These beads improve the separation between the liquids being distilled. The reason that fractional distillation gives better separation between the liquids is because the glass beads in the fractionating column provide "theoretical plates" on which the refluxing liquid can condense, re-evaporate, and condense again, essentially distilling the compound over and over (Geankoplis, 2003). The more volatile liquids tends to push towards the top of the fractionating column, while lower boiling liquids were stayed towards the bottom, giving a better separation between the liquids. In an ideal situation, the temperature in the distillation flask would be equal to the boiling point of the mixture

of liquids and the temperature at the top of the fractionating column would be equal to the boiling point of the lower boiling compound; all of the lower boiling compound would be distilled away before any of the higher boiling compound. In reality, fractions of the distillate must be collected because as the distillation proceeds, the concentration of the higher boiling compound in the distillate being collected steadily increases.

In most esterification reactions, equilibrium was reached without conversion to a sufficient level (Izak *et al*, 2004). During reversible esterification, it is possible to shift the reaction towards higher product conversion by selective removal of reaction products from the reaction mixture. A promising way to improve conversion consists in coupling the esterification reaction with a pervaporation process (Izak *et al*, 2004). The yield of an esterification reaction can also be increased by removing water from the reaction mixture as it was formed (Solomons and Fryhle, 2003).

## **2.7 Thermogravimetric Analyzers (TGA)**

### **2.7.1 Introduction**

Thermogravimetry Analyzers (TGA) is thermal analytical procedures to determine changes in weight in relation to change in temperature. The technique involves monitoring the weight loss of the sample in a chosen atmosphere (usually nitrogen or air) as a function of temperature. Such analysis relies upon a high degree of precision in three measurements which are weight, temperature, and temperature change. TGA was commonly employed in research and testing to determine characteristics of materials such as polymers.

Gravimetric methods of analysis were based on the measurement of mass (Skoog *et al*, 2000). There are two major types of gravimetric methods there are

precipitation methods and volatilization methods. In precipitation methods, the analyte was converted to a sparingly soluble precipitate. This precipitate was then filtered, washed free of impurities and converted to a product of known composition by suitable heat treatment and the product was weighed. In volatilization methods, the analyte or its decomposition products were volatilized at a suitable temperature. The volatile product was then collected and weighed.

In this research, the type of TGA used to analysis the product is Q500 where the working temperatures range from 25°C to 1000°C. The thermal analysis can be performed in a controlled atmosphere including oxygen, nitrogen or helium with adjustable flow rates.


## **CHAPTER 3**

### **METHODOLOGY**

#### **3.1 Introduction**

In any activity that requires concrete results, a well-defined methodology for achieving those results is important. With a methodology, the process of achieving a result can be studied and the result verified. Without a methodology, this type of debugging and assurance is very difficult. In this research, the type of methodology is experimental method. The theoretical study is important to know about the overall process of methodology needed to run the experiment and how to analysis the data.

The overall process of research methodology is shown in Figure 3.1. This research methodology was divided into three stages. In the first stage, it involves the preparation of catalyst and experimental set up. For the second stage, after the suitable apparatus for experiment has been setup completely then the experimental work was continued. The final stage in this research methodology is analysis the product.

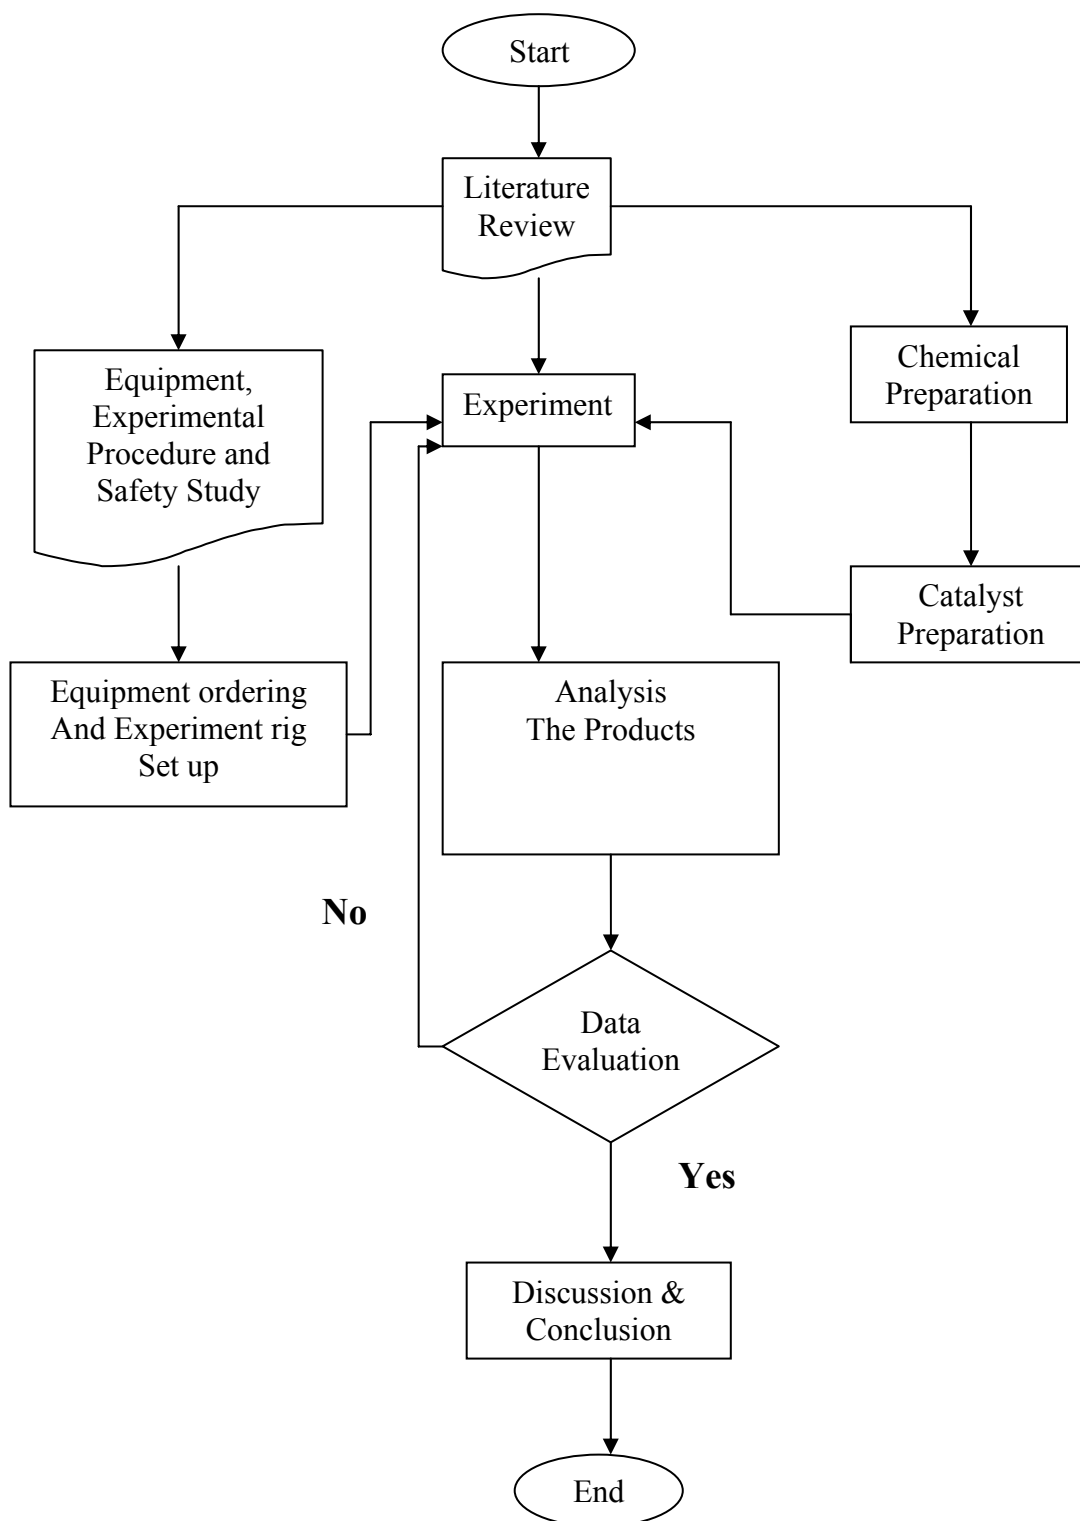

**Figure 3.1:** The process flow of methodology

## **3.2 Material**

### **3.2.1 Raw Material Preparation**

The raw materials used in this experiment were Pentaerythritol and Lauric acid. Pentaerythritol was supplied from Sigma Aldrich which has 98 % of purity. Meanwhile, Lauric Acid was supplied from Sigma Aldrich had a lower purity which is 95%. In this reaction, 1 mole of Pentaerythritol was reacted with 4 moles of Lauric acid to produce 1 mole of PETD and 4 moles of water. The mass ratio for the mixture between Pentaerythritol and Lauric acid was 1:4. In the reaction, 170.95 gram of Lauric acid and 29.05 gram of Pentaerythritol were mixed together in the reaction flask set. The total mass of the mixture was 200 gram.


### **3.2.2 Catalyst Preparation**

Sulfuric acid was used as a catalyst in the esterification reaction between Pentaerythritol and Lauric acid. Sulfuric acid was supplied from ChemAR which has 95-98 % of purity. Before running the experiment, the catalyst was diluted with distilled water to 0.01mol of concentration. This was most probably because the higher concentration of Sulfuric acid was affected the purity of the product. In order to dilute the Sulfuric acid to 0.01mol, 0.4904 gram of Sulfuric acid was mixed with 500mL of distilled water in volumetric flasks.

## **3.3 Experimental Set Up**

In producing the PETD, the esterification process was conducted in close system batch reactor. In setting up the apparatus, the lab scale experiment was used.

The example of schematic diagram for close system batch reactor was shown in Figure 3.2. This batch reactor was connected with simple distillation column for distillation process. In this research, the heating mantle was used as a heating medium and stirrer for stir the mixture of Lauric acid and Pentaerythritol. The mixture of the Lauric acid and Pentaerythritol was mixed together in the reaction flask set (500mL). A condenser was connected to distillation column to condense the water that was produced from the reaction. Cooling water was used in the condenser as a cooling agent. The water produced from the reaction was collected in the receiving flask. Digital thermocouple was used in the experiment to control and measure the temperature in the reaction flask set.

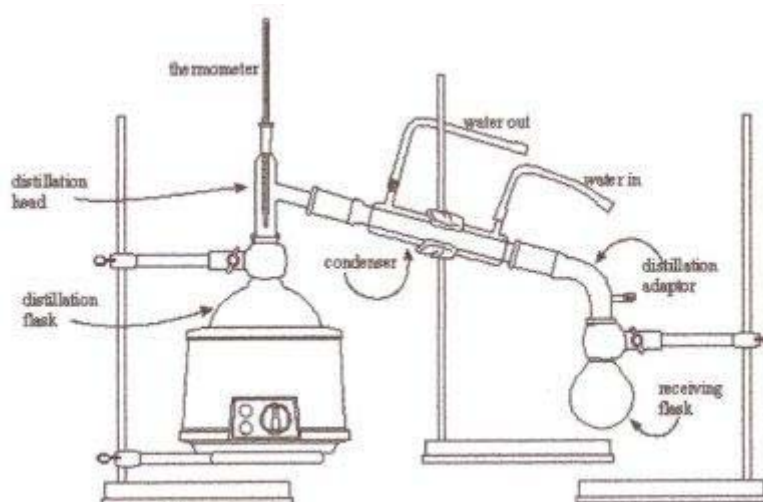

**Figure 3.2:** Simple batch distillation column

### 3.4 Experimental Work

Pentaerythritol and Lauric acid were mixed together in the batch reactor. Sulfuric acid as a catalyst had been put into the mixture. Then, the mixture was heated by using heating mantle up to the temperature range between 180°C to 270°C. The temperature of the reaction was manipulated at different value for different experiments that running. For the first experiment, the mixture was heated to 180°C

and was maintained by using digital thermocouple. Rerun the experiment by changing the set of temperature to 200°C, 220°C, 240°C and 260°C. The reaction time period of the experiment was between 8 hours to 24 hours. The experiments were conducted in different reaction time which was at 8 hours, 16 hours and 24 hours. The optimum temperature and duration time of reaction was investigated based on the reaction rate and the conversion of the product.

### **3.4.1 Reaction Condition**

The parameters that were manipulated in this research are temperature and duration time of reaction. So, the reaction conditions were different depending on the parameters that need to be studied. However the reactants amount which was Lauric acid and Pentaerythritol is the same for every reaction media prepared. In this research, there were two types of reaction based on the temperature and duration time of reaction. The experiment schedule for different temperature and duration time is shown in Table 3.1.



**Table 3.1:** Experiment schedule

<b>Experiment</b>	<b>Temperature (°C)</b>	<b>Duration Time ( Hour )</b>
Experiment 1	180	8
		16
		24
Experiment 2	200	8
		16
		24
Experiment 3	220	8
		16
		24
Experiment 4	240	8
		16
		24
Experiment 5	260	8
		16
		24

Table 3.1 shows that the experiments were conducted at different temperatures which are 180°C, 200°C, 220°C, 240°C and 260°C. The experiments for each temperature were conducted in different duration time of reaction which was at 8 hours, 16 hours and 24 hours. The digital thermocouple was used in order to measure and to maintain the temperature in the reaction flask set.

### 3.4.2 Separation Process

From the esterification process, the product that produced was Pentaerythritol tetradodecanoate (PETD) and the byproduct produced was water. The water that produced was removed by separation process. The simple distillation column was being used to separate water from PETD. In the distillation column, there was a condenser unit that was used to condense the water that was evaporated and was collected into the receiving flask. The boiling point of water was  $100^{\circ}\text{C}$  and the boiling point of PETD was  $260.5^{\circ}\text{C}$ . So, the water was evaporated first from PETD when heated in the batch reactor. When the vapor passes through the condenser unit, the coolant water was condensed the vapor back into liquid water. The schematic diagram for simple distillation column was shown in Figure 3.3.



**Figure 3.3:** The distillation column

### 3.4.3 Drying Process

After the PETD was produced from the esterification between Lauric acid and Pentaerythritol, the products then were dried at the ambient temperature. The drying process of the products was important to remove the water contained in the

PETD products. The duration time for the products to dry completely was about 2 to 3 days. After the products were completely dried, the products were grinded and crushed into the powder as shown in Figure 3.4.



**Figure 3.4:** The powder of PETD

### **3.5 Analysis data**

#### **3.5.1 Yield of Product**

The yield percent of PETD produced is based on the mass of product and reactant. The products were dried for a few days in room temperature to remove water that was contained in the products. After the products were dried completely then the products were weighed. The mass of the products were divided with mass of reactants to get the yield of product produced.

### 3.5.2 Using Thermogravimetric Analyzers (TGA)

The products that were produced from the esterification process between Lauric acid with Pentaerythritol were less of purity. This was most probably because the products still contains the small amount of reactants. In this research, Thermogravimetric Analyzers (TGA) was used to analysis the composition of PETD that contained in the product. The model for Thermogravimetric Analyzers is shown in Figure 3.5.



**Figure 3.5:** Thermogravimetric Analyzers (TGA)

The product of PETD was placed into a tare TGA sample pan which was attached to a sensitive microbalance assembly. The sample holder portion of the TGA balance assembly was subsequently placed into a high temperature furnace. The heating rate was set at 20°C per minutes. The balance assembly measures the initial PETD weight at room temperature and then continuously monitors the changes in products weight (losses or gains) as heat was applied to the products. Typical weight loss profiles were analyzed for the amount or percent of weight loss at any given temperature, the amount or percent of non combusted residue at some final temperature, and the temperatures of various sample degradation processes. The results from the analysis of PETD were compared with the standard samples from the industry.

## CHAPTER 4

### RESULT AND DISCUSSION

#### 4.1 Introduction

In this research, the theoretical study and experimental work have an important relationship between each other in order to complete this research. Basically, the experimental work was based on the literature survey and methodology stated in Chapter 3. This chapter describes about the result gained from the experimental work. The parameters discussed in this research based on the effect of temperature to the reaction rate and the effect of catalyst to the duration time of reaction. The yield percentage of PETD was observed in this research. The observation about the characteristics like color and structure of products were also studied. The Thermogravimetric Analyzers was used to analysis the composition of PETD in the products that produced. The experiments were run using Lauric acid and Pentaerythritol as reactant in a batch system.

The overall yield percentage of PETD is shown in equation 4.1.

$$Yield(\%) = \frac{[Product(g)]}{[Reactant(g)]} \times 100\% \quad (4.1)$$

## 4.2 Analysis Process

The overall yield in percentage of PETD produced was summarized in Table 4.1.

**Table 4.1:** The summary for overall yield of PETD produced

Lauric acid (gram)	Pentaerythritol (gram)	Total mass (gram)	Temperature (°C)	Duration time (hr)	PETD (gram)	Yield (%)
170.95	29.05	200	180	8	175.37	87.69
				16	178.94	89.47
				24	185.02	92.51
170.95	29.05	200	200	8	182.61	91.31
				16	186.72	93.36
				24	189.53	94.77
170.95	29.05	200	220	8	187.24	93.62
				16	191.15	95.58
				24	190.03	95.02
170.95	29.05	200	240	8	186.26	93.13
				16	180.01	90.01
				24	175.98	87.99
170.95	29.05	200	260	8	171.38	85.69
				16	163.54	81.77
				24	158.39	79.195

Table 4.1 shows the results obtained from the experiments based on yield percentage of PETD produced. In this research, the manipulated parameters were temperature and duration time of the reaction. The temperatures for the experiment were manipulated at different values which are 180°C, 200°C, 220°C, 240°C and 260°C. These temperatures were investigated for different duration time of reaction. The duration time period of reaction observed in this experiments were at 8 hours, 16 hours and 24 hours. The fixed variables in the experiment were the amount of raw materials and amount of catalyst. In the reaction, 170.95 gram of Lauric acid and

29.05 gram of Pentaerythritol were mixed together in the reaction flask set. The total mass of the mixture was 200 gram. The experiments for each temperature were conducted in different duration time of reaction. The different duration time of reaction gave the different yield of PETD produced.

Based on the observation that had been done, as the operating temperature was increased, the yield of PETD was also increased. The same observation of yield was obtained when the duration time period experiment was increased. That was most probably because the water production rate was increased when the temperature increased. The water production rate was affected the yield of PETD produced. The same results were also obtained by Nurul Aini (2005).

**Table 4.2:** The color observation of PETD produced

Temperature (°C)	Duration time (hr)	Color Observation of PETD
180	8	White
	16	Slightly yellowish
	24	Slightly yellowish
200	8	White
	16	Slightly yellowish
	24	Slightly yellowish
220	8	Slightly yellowish
	16	Slightly yellowish
	24	Dark yellow
240	8	Slightly yellowish
	16	Dark yellow
	24	Brown
260	8	Dark yellow
	16	Brown
	24	Dark brown

Table 4.2 shows the color observation of PETD produced for different temperature and different duration time of reaction. At temperature of 180°C and at duration time of 8 hours, the color of the product was white. As the duration time of reaction was increased to 16 hours and 24 hours, the color was changed to slightly yellowish. The same observation was obtained for temperature at 200°C. At the temperature of 220°C and at duration time of 8 hours and 16 hours, the color of the products was slightly yellowish. As the duration time of reaction was increased to 24 hours, the color of product was changed from slightly yellowish color to dark yellow. The same results were obtained for temperatures at 240°C and 260°C when the duration time of reaction was increased.



**Figure 4.1:** White color of PETD





**Figure 4.2:** Slightly yellowish color of PETD



**Figure 4.3:** Dark yellow color of PETD



**Figure 4.4:** Brown color of PETD



**Figure 4.5:** Dark brown color of PETD


Figure 4.1 to Figure 4.5 shows the color observation of PETD produced. The color of PETD became darker when the operating temperature and operating time were increased. This was most probably due to overheating of product. The slightly

yellowish color shows the higher purity of PETD produced. The same observation was also achieved by Kamal *et al* (2005).

### 4.3 Esterification of Lauric acid with Pentaerythritol on Different Temperature

#### 4.3.1 Effect of temperature to produce PETD for 8 hours

A study on effect of temperature for 8 hours duration time had been observed. The result was obtained as shown in Figure 4.1.

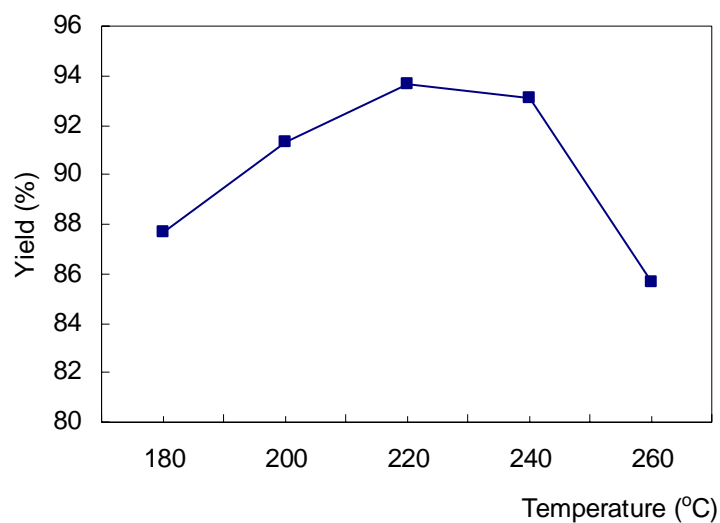

**Figure 4.6:** The effect of temperature for 8 hours duration time of reaction


Figure 4.6 shows the effect of different temperatures for 8 hours duration time of PETD production. At the temperature of 180°C, the yield of PETD produced was 87.69 %. As the temperature of reaction was increased to 200°C, the yield of PETD was increased to 91.31 %. From the Figure 4.6 above, the maximum yield of PETD produced was at 220°C which was 93.62 %. The yield of PETD was

decreased to 93.13 % at the temperature of 240°C. At the temperature of 260°C, the yield of PETD produced was suddenly decreased to 85.69 %.

The yield of PETD was varied with the temperature between 180°C to 220°C because the water production rate was proportional to the temperature of the reaction. As the temperature was increased, the water production rate was increased. The yield of PETD was increased when the water was removed from the products in higher rate.

#### 4.3.2 Effect of temperature to produce PETD for 16 hours

A study on effect of temperature for 16 hours duration time had been observed. The result was obtained as shown in Figure 4.7.

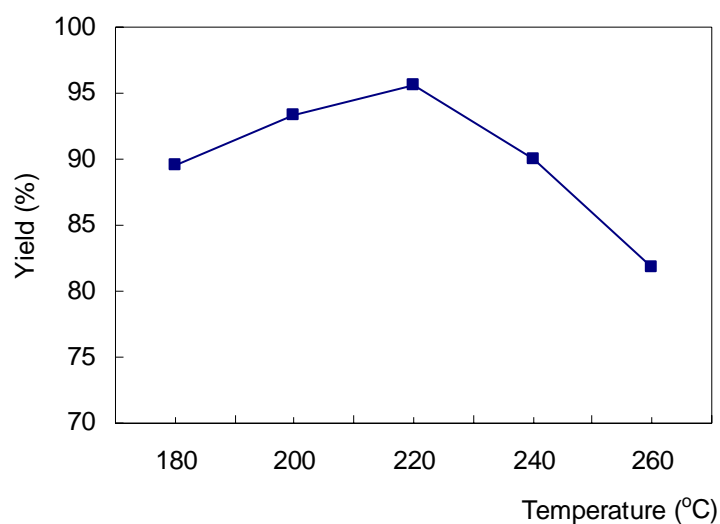

**Figure 4.7:** The effect of temperature for 16 hours duration time of reaction


Figure 4.7 shows the effect of different temperatures for 16 hours duration time of PETD production. At the temperature of 180°C, the yield of PETD produced was 89.47 %. As the temperature of reaction was increased to 200°C, the yield of

PETD was increased to 93.36 %. From the Figure 4.7 above, the maximum yield of PETD produced was at 220°C which was 95.58 %. The yield of PETD was decreased to 90.01 % at the temperature of 240°C. At the temperature of 260°C, the yield of PETD produced was suddenly decreased to 81.77 %.

The yield of PETD was varied with the temperature between 180°C to 220°C because the water production rate was proportional to the temperature of the reaction. As the temperature was increased, the water production rate was increased. The yield of PETD was increased when the water was removed from the products in higher rate.

#### 4.3.3 Effect of temperature to produce PETD for 24 hours

A study on effect of temperature for 24 hours duration time had been observed. The result was obtained as shown in Figure 4.8.

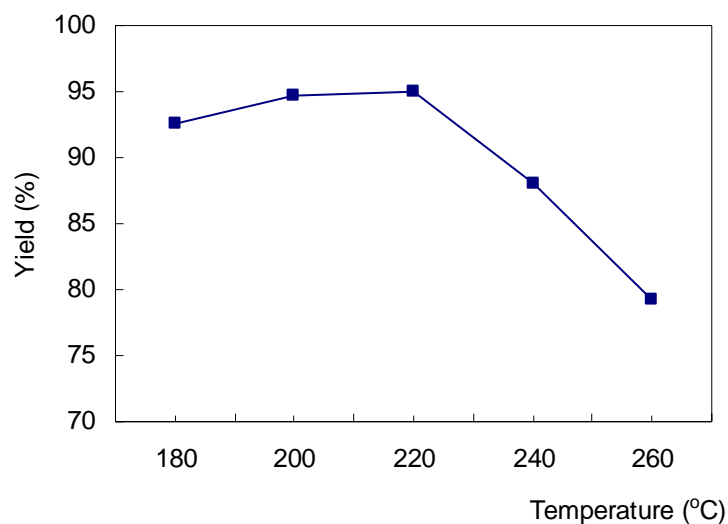

**Figure 4.8:** The effect of temperature for 24 hours duration time of reaction

Figure 4.8 shows the effect of different temperatures for 24 hours duration time of PETD production. At the temperature of 180°C, the yield of PETD produced was 92.51 %. As the temperature of reaction was increased to 200°C, the yield of PETD was increased to 94.77 %. From the Figure 4.8 above, the maximum yield of PETD produced was at 220°C which was 95.02 %. The yield of PETD was decreased to 87.99 % at the temperature of 240°C. At the temperature of 260°C, the yield of PETD produced was suddenly decreased to 79.195 %.


The yield of PETD was varied with the temperature between 180°C to 220°C because the water production rate was proportional to the temperature of the reaction. As the temperature was increased, the water production rate was increased. The yield of PETD was increased when the water was distilled resulting the rate of production of PETD was increased.

The optimum duration time of reaction between Lauric acid with Pentaerythritol was at 16 hours. The application of Sulfuric acid as the catalyst reduced the duration time of reaction from 24 hours to 16 hours. Based on the results obtained from the experiments, the optimum yield of the reaction between Lauric acid with Pentaerythritol was at temperature of 220°C and at 16 hours duration time of reaction.

#### **4.4 Analysis using Thermogravimetric Analyzers**

##### **4.4.1 Analysis Result for Standard PETD**

The analysis for the standard PETD based on weight percent was shown in Figure 4.9:

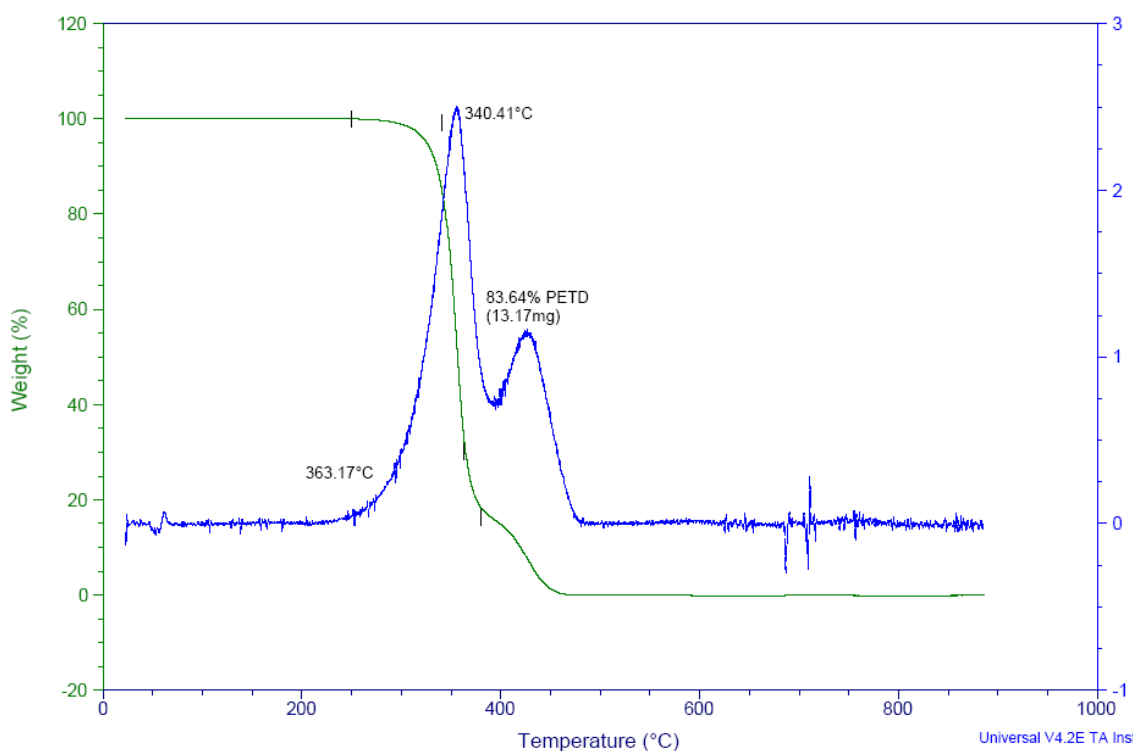


**Figure 4.9:** The standard PETD analysis

Figure 4.9 shows the composition of PETD produced in the esterification between Lauric acid with Pentaerythritol. The weight percent of PETD in the product was 83.64 %. The weight percent of Lauric acid in the product was 16.36 %. The weight percent shows the purity of PETD produced. The purity of PETD produced was 83.64 %. In the esterification to produce PETD, 4 mol of Lauric acid reacted with 1 mol of Pentaerythritol. The limiting reactant in this reaction was Pentaerythritol. Lauric acid was not completely reacted in the reaction and still existed in the product. That was most probably because Pentaerythritol had limited the reaction with Lauric acid when the reaction reached the equilibrium phase.

#### 4.4.2 Analysis Result of PETD for 220°C and 16 hours

The analysis for the PETD at the temperature of 220°C and at duration time of 16 hours based on weight percent was shown in Figure 4.10.

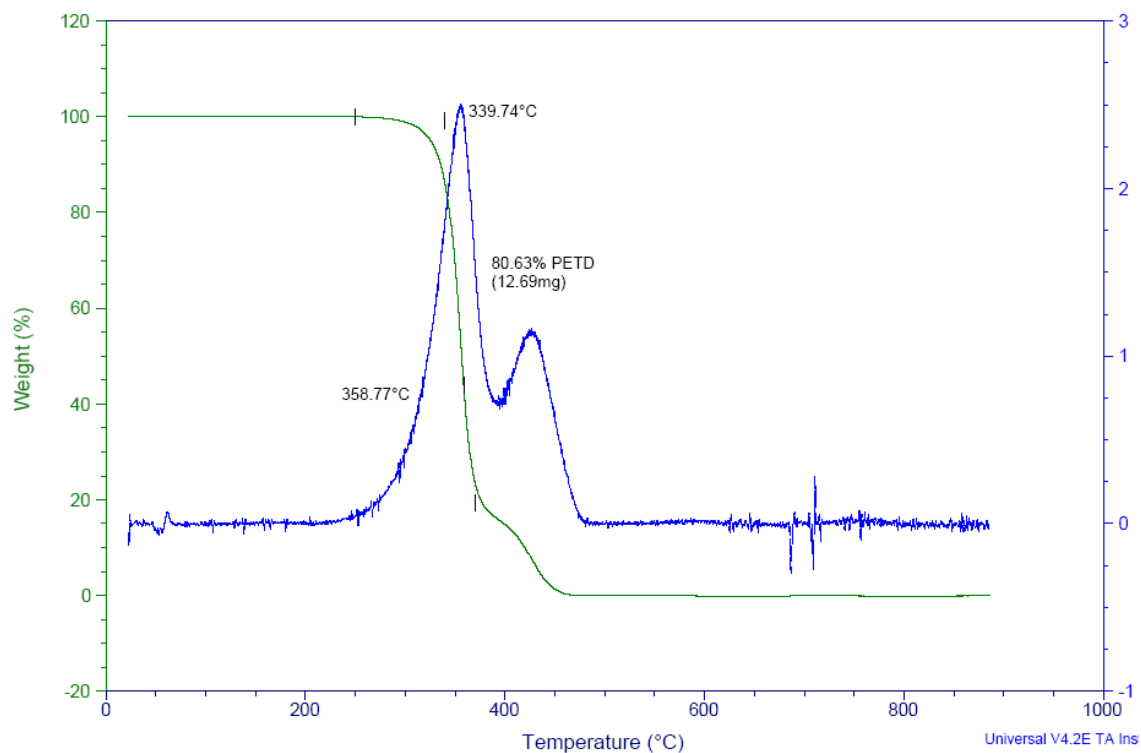

**Figure 4.10:** The analysis of PETD at the temperature of 220°C and 16 hours duration time

Figure 4.10 shows the composition of PETD produced at the temperature of 220°C and 16 hours duration time in weight percent in the esterification to produce PETD. The weight percent of PETD in the product was 80.63 %. The weight percent of Lauric acid in the product was 19.37 %. The purity of PETD produced was 80.63 %. The comparison from the standard PETD analysis result (Figure 4.9) shows that the optimum temperature for the reaction was at 220°C and the optimum duration time was at 16 hours.



## CHAPTER 5

### CONCLUSION AND RECOMMENDATION

#### 5.1 Conclusion

In the esterification process to produce PETD, the optimum conditions of the reaction are important characteristics to get the highest purity of PETD. In this research, the parameters are temperature and duration time period of reaction. These parameters were manipulated in order to get the optimum temperature and duration time of reaction. The catalyst application to the reaction was reduced the energy and duration time period.

From the observation that had been done, the optimum temperature of the reaction was at 220°C. The yield of PETD produced at this temperature was very high. The optimum duration time of reaction to produce PETD was at 16 hours. Sulfuric acid was used as the catalyst in the reaction to lower down the temperature of reaction from 260°C to 220°C. This catalyst was also reduced the duration time of reaction from 24 hours to 16 hours.

#### 5.2 Recommendation

A few recommendations are suggested in this study for future research. It is more efficient if using others catalyst in the esterification reaction such as hydrochloric acid. The different catalyst gives the different optimum condition of reaction in terms of temperature and duration time of reaction. The different types of

catalyst also affect the reaction condition. The application of enzyme as the catalyst also reduces the temperature of the reaction below than 220°C.

## REFERENCES

Bohm Stefan, Gunther Hessel, Holger Kryk, Horst Michael Prasser, Wilfried Schmitt (2000). *Auto Catalytic Effect of Acetic Acid On The Kinetics Of The Methanol / Acetic Anhydride Esterification*.

Carey F. A. (2000). *Organic Chemistry*. 4th Ed. New York: Mc Graw Hill

Cengel Yunus A. and Michael A. Boles (2002). *Thermodynamics: An Engineering Approach*. 4th Ed. New York: Mc Graw Hill.

Fogler H. S. (1999). *Elements of Chemical Reaction Engineering*. 3rd Ed. Upper Saddle River, New Jersey: Prentice Hall.

Geankoplis C. J. (2003). *Transport Processes and Separation Process Principles*. 4th Ed. New Jersey: Prentice Hall

Iliefiyonna Izwanna Amin (2005). *Esterification of Lauric acid with Pentaerythritol using Enzyme*. Kolej Universiti Kejuruteraan & Teknologi Malaysia.

Izak Pavel, Nuno M.M. Mateus, Carlos A. M. Afonso, Joao G. Crespo (2004). *Separation and Purification Technology : Enhanced Esterification Conversion In A Room Temperature Ionic Liquid By Integrated Water Removal With Pervaporation*. 41: 141-145.

Janice G. Smith (2006). *Organic Chemistry*. New York: Mc Graw Hill.

Jim Clark (2003). *Chemguide*. Retrieved to World Wide Web  
<http://www.chemguide.co.uk/index.html#top>

Kamal Yusoh, Sabri Mahmud, Che Ku Faizal (2005). *Production of PETD for Varnish Additive In Magnetizing Wire Coating*. Kolej Universiti Kejuruteraan & Teknologi Malaysia.

Kaewthong Wiphum, Sarote Sirisansaneeyakul, Poonsuk Prasertsan and Aran H-Kitikum (2003). *Process Biochemistry: Continuous Production of Monoacylglycerols by Glycerolysis of Palm Olein With Immobilized Lipase*.

Liu Qing Lin, Hong Fang Chen (2001). *Journal of Membrane Science: Modeling of Esterification of Acetic acid with n-butanol*. 196: 171-178.

Nijhuis T.A., A. E. W. Beers, F. Kapteijn, J.A. Moulijn (2002). *Chemical Engineering Science: Water Removal by Reactive Stripping for A Solid-Acid Catalyzed Esterification In A Monolithic Reactor*. 57: 1627-1632.

Nurul Aini M. Ariffin (2005). *Potential of Varnish Additive Production: Thermodynamics and Kinetic Studies*. Kolej Universiti Kejuruteraan & Teknologi Malaysia.

Otera Junzo (2003). *Esterification: Methods, Reactions and Applications*. 2nd Ed. Wienheim: Wiley-VCH.

Skoog D. A., Donald M. West, F. James Holler, Stanley R. Crouch (2004). *Fundamental of Chemical Analysis*. 8th Ed. Belmont: Thomson Brooks/Cole.

Smith J. M., H. C. Van Ness, M. M. Abbott (2001). *Chemical Engineering Thermodynamics*. New York: Mc Graw Hill.

Solomons T. W. Graham, Craig B. Fryhle (2003). *Organic Chemistry*. 8th Ed. Danvers: John Wiley.

Wu Jin-Chuan, Bao-Dong Song, Ai-Hua Xing, Y. Hayashi, M.M.R. Talukder, Shi-Chang Wang (2002). *Process Biochemistry: Esterification reactions catalyzed by surfactant-coated Candida rugosa lipase in organic solvents*. 37: 1229-1233.