

-

CFD SIMULATION OF PARTICLE MIXING IN A FLUIDIZED BED

KONG DEYI

A project report submitted in partial fulfillment of the requirements
For the award of the degree of
Bachelor of Mechanical Engineering with Automotive Engineering

Faculty of Mechanical Engineering
UNIVERSITY MALAYSIA PAHANG

JUNE 2013

-

UNIVERSITI MALAYSIA PAHANG
FACULTY OF MECHANICAL ENGINEERING

I certify that the project entitled CFD Simulation of Particle Mixing in a Fluidized Bed is written by Kong Deyi. I have examined the final copy of this project and in my opinion it is fully adequate in terms of scope and quality for the award of the degree of Bachelor of Engineering. I herewith recommend that it be accepted in partial fulfillment of the requirements for the degree of Bachelor of Mechanical Engineering with Automotive Engineering.

Dr. Mohd Firdaus Basrawi
Examiner

Signature

SUPERVISOR'S DECLARATION

I hereby declare that I have checked this project and in my opinion, this project is adequate in terms of scope and quality for the award of the degree of Bachelor of Mechanical Engineering with Automotive Engineering.

Signature :

Name of Supervisor :Prof. Dr. Hj. Shahrani Bin Anuar

Position :Professor

Date :

STUDENT'S DECLARATION

I hereby declare that the work in this project is my own except for quotations and summaries which have been duly acknowledged. The project has not been accepted for any degree and is not concurrently submitted for award of other degree.

Signature :

Name : Kong Deyi

ID Number : MH09089

Date :

Dedicated to my dear parents

ACKNOWLEDGEMENTS

I am grateful and would like to express my sincere gratitude to my supervisor Prof. Dr. Hj. Shahrani Bin Anuar for his germinal ideas, invaluable guidance, continuous encouragement and constant support in making this research possible. He always impressed me with his outstanding professional conduct, his strong conviction for science, and his belief that a degree program is only a start of a life-long learning experience. I appreciate his consistent support from the first day I applied to under graduate program to these concluding moments. I am truly grateful for his progressive vision about my training in science, his tolerance of my naïve mistakes, and commitment to my future career. I also would like to express very special thanks to my co-supervisor Mr. Ahmmad Syukrie Mat Yudin for his suggestion and co-operation throughout the study. My sincere thanks for the time he spent in proofreading and correcting my mistakes.

My sincere thanks go to all my lab mates and members of the staff of the Mechanical Engineering Department, UMP, who helped me in many ways and made my stay at UMP pleasant and unforgettable. Many special thanks go to member of my Fluidized bed research group for their excellent co-operation, inspirations and supports during this study.

I acknowledge my sincere indebtedness and gratitude to my parents for their love, dream and sacrifice throughout my life. I cannot find the appropriate words that could properly describe my appreciation for their devotion, support and faith in my ability to attain my goals. Special thanks should be given to my committee members. I would like to acknowledge their comments and suggestions, which were crucial for the successful completion of this study.

ABSTRACT

This project is to do the research of CFD simulation of particle mixing in a fluidized bed. Nowadays, fluidized bed is widely used in different kinds of industry, such as power plant, petroleum industry and food processing industry. The objectives of this project are to study the mixing and segregation phenomena in a fluidized bed and to design distributors with low pressure drop operation. Fluidized beds suspend solid fuels on upward-blowing jets of air during the combustion process. The main characteristics of fluidized bed are pressure drop, fluid velocities, bubble size and bed height. Computational fluid dynamics (CFD) simulation is the method to study this project. Firstly, Ergun 6.2 software is used to study particle mixing and segregation phenomena. Secondly, 3D geometry of fluidized bed is drawn by using Solidworks 2012. Flow simulation program is used to study pressure drop in the fluidized bed 3D drawing. Minimum fluidized velocity and operation point is found by using Ergun 6.2 software. Pressure drop is found by using Flow Simulation program. Compare with other researcher's results these simulation results are accepted.

ABSTRAK

Projek ini adalah untuk melakukan penyelidikan CFD simulasi zarah mencampurkan dalam relau fluidized. Kini, relau fluidized digunakan secara meluas dalam pelbagai industri, seperti loji kuasa, industri petroleum dan industri pemprosesan makanan. Objektif projek ini adalah untuk mengkaji pengasingan pergaulan dan fenomena dalam relau fluidized dan merekabentuk pengedar dengan operasi kejatuhan tekanan yang rendah. Relau fluidized menggantung bahan api pepejal di atas-bertiup jet udara semasa proses pembakaran. Ciri-ciri utama relau fluidized adalah kejatuhan tekanan, halaju cecair, saiz gelembung dan ketinggian katil. Dinamik bendalir pengiraan (CFD) simulasi adalah kaedah untuk mengkaji projek ini. Pertama, Ergun 6.2 perisian digunakan untuk mengkaji zarah pergaulan dan fenomena pengasingan. Kedua, geometri 3D relau fluidized diambil dengan menggunakan Solidworks 2012. Program simulasi aliran digunakan untuk mengkaji kejatuhan tekanan di dalam relau lukisan 3D fluidized. Halaju dibendalirkan minimum dan titik operasi didapati dengan menggunakan Ergun 6.2 perisian. Kejatuhan tekanan yang didapati dengan menggunakan program Simulasi Aliran. Bandingkan dengan hasil penyelidikan lain keputusan ini simulasi diterima.

TABLE OF CONTENTS

	Page	
EXAMINER’S DECLARATION	i	
SUPERVISOR’S DECLARATION	ii	
STUDENT’S DECLARATION	iii	
ACKNOWLEDGEMENTS	v	
ABSTRACT	vi	
ABSTRAK	vii	
TABLE OF CONTENTS	viii	
LIST OF TABLES	xi	
LIST OF FIGURES	xii	
LIST OF SYMBOLS	xiv	
CHAPTER 1 INTRODUCTION		
1.1	Background Studies	1
1.2	Problem Statement	2
1.3	Objectives	3
1.4	Scopes	3
CHAPTER 2 LITERATURE REVIEW		
2.1	Basic Fluidized Bed System	4
2.2	Distributor	4
	2.2.1 Function of Distributor	4
2.3	The Main Characteristics of Fluidized Bed	5
2.4	Pressure Drop	5
2.5	Fluid Velocities	12

2.6	Particle Mixing and Segregation Phenomena	12
2.7	Bubbling	13
CHAPTER 3 METHODOLOGY		
3.1	Study Internal Air Flow	15
3.2	CFD Simulation Study	15
3.3	Ergun 6.2	15
	3.3.1 Ergun 6.2 simulation	16
3.4	Solidworks 2012 Flow Simulation	16
	3.4.1 Solidworks model	16
	3.4.2 Solidworks flow simulations	18
CHAPTER 4 RESULT AND DISCUSSION		
4.1	Synopsis	31
4.2	Particle Mixing Simulation	31
	4.2.1.1 Particle 1 simulation	32
	4.2.1.2 Particle 1 bubbling simulation	33
	4.2.2.1 Particle 2 simulation	35
	4.2.2.2 Particle 2 bubbling simulation	36
	4.2.3.1 Particle 3 simulation	38
	4.2.3.2 Particle 3 bubbling simulation	39
4.3	Pressure Drop Simulation	41
4.4	Compare with Other's Result	43
CHAPTER 5 CONCLUSION		
5.1	Conclusion	44
5.2	Recommendation	45

REFERENCES	46
APPENDICES	
A Gantt chart	48
B List of flow simulation results	49
C Software specification	59
D Hardware specification	60

LIST OF TABLES

Table No.	Title	Page
2.1	Particle Separator Dimensional and Operational Characteristics	10
2.2	Calculated Parameters for the Distribution Plate	11
2.3	Design Parameters for the Air Distribution Plate	11
3.1	Sand Properties	16
4.1	Sand Properties	32
4.2	Sand 1 Simulation Results	33
4.3	Sand 1 Bubbling Simulation Results	35
4.4	Sand 2 Simulation Results	36
4.5	Sand 1 Bubbling Simulation Results	38
4.6	Sand 3 Simulation Results	39
4.7	Sand 3 Bubbling Simulation Results	41
4.8	Pressure Drop of Each Distributor	42

LIST OF FIGURES

Figure No.	Title	Page
2.1	Pressure drop versus superficial gas velocity for initially mixed/segregated mixtures	7
2.2	Comparison Plot of Experimental Bed Pressure Drop with CFD Simulation using Gidaspow drag model	9
3.1	Design of Distributors 2mm and 3mm Linear Pattern	17
3.2	Design of Distributors 4mm and 5mm Linear Pattern	17
3.3	Dimension of the design	18
3.4	Solidworks tool bar	19
3.5	Create lids	19
3.6	Gravity and flow type setting	20
3.7	Select fluid	21
3.8	Result and geometry resolution setting	22
3.9	Subdomain setting	23
3.10	Boundary conditions setting	24
3.11	Run the calculation	25
3.12	Example of air flow result	25
3.13	Flow Chart of Flow Simulation	27
3.14	FYP 1 Flow Chart	28
3.15	Continue FYP 1 Flow Chart	29
3.16	FYP 2 Flow Chart	30

4.1	Particle 1, simulation	33
4.2	Sand 1, Bubbling Simulation of Operating Point	34
4.3	Sand 1, Bubbling Properties of Simulation	34
4.4	Sand 2, particle simulation	36
4.5	Sand 2, Bubbling Simulation of Operating Point	37
4.6	Sand 2, Bubbling Properties of Simulation	37
4.7	Sand 3, Particle Simulation	39
4.8	Sand 3 Bubbling Simulation of Operating Point	40
4.9	Sand 3 Bubbling Properties of Simulation	40
4.10	Variation of Distributors	42
4.11	Result From Other Researcher	43

LIST OF SYMBOLS

U_{mf}	min fluidized velocity
U_b	bubble rise velocity
μ	fluid viscosity
ρ_g	density of gas
ρ_p	density of particles
Ar	Archimedes number
d_p	diameter of particle
D_b	bubble diameter
ε_b	bubble void fraction
H	height of the bed
z	vertical length of bubble
s^0	entropy of fluid
C_d	coefficient of discharge

CHAPTER 1

INTRODUCTION

1.1 BACKGROUND STUDIES

Currently, environment pollution is one of the most serious issues in the world such as ozone layer depletion, acid rains and greenhouse effect (Proimos, 2011). From the study, industrial combustion plays the main role to contribute the polluted gases to atmosphere.

Research suggested that fluidized bed is a good device to reduce the toxic gases emission in industry. In general, fluidized bed is a coal burning furnace in which the air is passed through the hot and turbulent bed of sand or ash. It behaves like a fluid, and the coal will be burned efficiently at lower temperatures to reduce nitrogen oxides emission. If limestone is added to the bed along with the coal, the emission of sulfur dioxide to the atmosphere can be further reduced significantly (Oxford World Encyclopedia 1998).

Fluidized bed is applicable in different areas. Back to 1922, the first industrial application of fluidization in the coal gasification reactor was made by Fritz Winkler. In 1940s, the fluidized solid process was successfully commercialized on a massive scale in the petroleum industry to crack the heavy hydrocarbons to fuel oil and metallurgical processing (roasting arsenopyrite). In the 1960s, VAW-Lippewerk in Lünen, Germany implemented the first industrial bed for the combustion of coal and later for the calcinations of aluminium hydroxide. However, the explosion of research, application

and commercialization of fluidized bed process in other industry only started since 1980s (Wang, 2003).

Nowadays, fluidized beds are also widely used in different kinds of industry. First of all, fluidized bed is important equipment in power plant which is used for a coal gasification process. In petroleum industry, fluidized bed is used for catalytic cracking process which effects intimate contact between the catalyst and hot vapors in the cracking of heavy hydrocarbons to fuel oil. In metallurgical industry, fluidized bed is used for roasting arsenopyrite and calcinations of aluminum hydroxide. In food processing industry, fluidized bed is used to accelerate freezing (<http://www.almoprocess.com/>).

1.2 PROBLEM STATEMENT

The researches on fluidized bed have already been going for one hundred years since the early of 20th century (Wang, 2003). Until now, the fluidized bed is still not used widely. Because the operation cost and installation cost are very high.

Eliminate the drawback CFD simulation of fluidized bed is required. CFD simulation can increase the operation efficiency and reduce the installation and operation cost. The simulation results of pressure drop can achieve low operation cost. And particle mixing and segregation result can lead good combustion efficiency to reduce pollution gases. This research is to prepare the high combustion efficiency, low emission, and low operation cost fluidized bed for industrial use by using CFD simulation.

1.3 OBJECTIVES

The objectives for this project are as follows

- i. To study and predict the mixing and segregation phenomena in a fluidized bed system.
- ii. To design distributors with low pressure drop operation.

1.4 SCOPES

The scopes for this project are as follows

- a. Study internal CFD simulation
- b. Study Ergun fluidized bed model
- c. 3D engineering drawing of fluidized bed and distributors model will be used
- d. Run Ergun simulation and air flow simulation
- e. Data analysis and compare
- f. Final report preparation

CHAPTER 2

LITERATURE REVIEW

2.1 BASIC FLUIDIZED BED SYSTEM

Fluidized beds suspend solid fuels on upward-blowing jets of air during the combustion process. The result is a turbulent mixing of gas and solids. The tumbling action, much like a bubbling fluid, provides more effective chemical reactions and heat transfer (Grace John R., Leckner Bo, Zhu Jesse, Cheng Yi 2008).

2.2 DISTRIBUTOR

Distributor is a plate which is located at the bottom of the fluidized bed. The fluid flows upward through the bed. It contains numerous holes, and makes the solid particles to be suspended.

2.2.1 Function of Distributor

The major function of the distributor is to distribute the fluidizing gas across the base of the bed so that it is maintained in the fluidized condition over the whole of its cross-section. The distributor also plays a major part in determining the size of the bubbles in the bed which are the major cause of particle circulation (Qureshi and Creasy 1978).

2.3 THE MAIN CHARACTERISTICS OF FLUIDIZED BED

The ideal fluidization bed showed similar to the nature of the liquid. The fluid density is smaller than the average density of the bed may be suspended in the bed surface; maintain the level of bed surface; bed obey hydrostatic relationship, i.e. height difference L of the two cross section of the differential pressure.

$$\Delta p = \rho g L \quad (2.1)$$

Particles having with a liquid like fluidity can be ejected from the orifice of the wall.

The above properties make the phenomenon of the particulate material in the fluidized bed can be like a fluid continuous feeding and discharging the bed has a unique advantage to a wide range of applications, and due to the uniform particle sufficiently mixed bed temperature, concentration.

In the two-phase movement of fluid and particles within the bed, due to the differential flow rate, fluid density of the particles, the particle size and the different sizes of the bed, can exhibit different fluidized state, but mainly divided into the fluidization state and aggregative fluidized state (Grace John R., Leckner Bo, Zhu Jesse, Cheng Yi 2008).

2.4 PRESSURE DROP

The air through the distributor pressure should be different. It is relatively undisturbed by the bed pressure fluctuations above it.

Treated as a combination of a sudden contraction followed by a sudden enlargement, a simple drilled orifice in a distribution plate would be expected to have an overall pressure drop given by

$$\Delta H_d = 0.5 \left(\frac{u^2}{2g} \right) + \left(\frac{u_0^2}{2g} \right) \quad (2.2)$$

In consistent units, or

$$\frac{2g\Delta H_d}{u_0^2} = 1.5 \text{ velocity heads} \quad (2.3)$$

However, unless the plate is very thick compare with the orifice diameter (i. e. $\frac{d}{t} \ll 1$), the expansion loss will be influenced by flow patterns resulting from the sudden contraction of the flow on entry to the orifice (A.E.QURESHI & D.E.CREASY 1978).

$$\frac{2g\Delta H_d}{u_0^2} = 1/C_d^2 \quad (2.4)$$

C_d is coefficient of discharge.

C_d is a weak function of the distributor free area \emptyset and $\frac{d}{t}$ taking a rough correlation as

$$C_d = 0.82(d/t)^{-0.13} \quad (2.5)$$

Substitution in the above equation yields

$$\frac{2g\Delta H_d}{u_0^2} = 1.49\left(\frac{d}{t}\right)^{0.26} \quad (2.6)$$

Figure 2.1 presents the results obtained for pressure drop across the bed as the superficial gas velocity was increased. At relatively low superficial gas velocity, the pressure drop across the bed was approximately proportional to the superficial gas velocity. However, the pressure drop values were constant at above the minimum fluidization velocity, U_{mf} . The consistency in pressure drop showed that the fluidizing gas stream had fully supported the weight of the whole bed in the dense phase. Thus U_{mf} reached when the drag force of the up-wards fluidizing air equals to the bed weight. In this case, U_{mf} was determined as 1.35 ms^{-1} (S.M. Tasirin, S.K. Kamarudin and A.M.A. Hweage 2008).

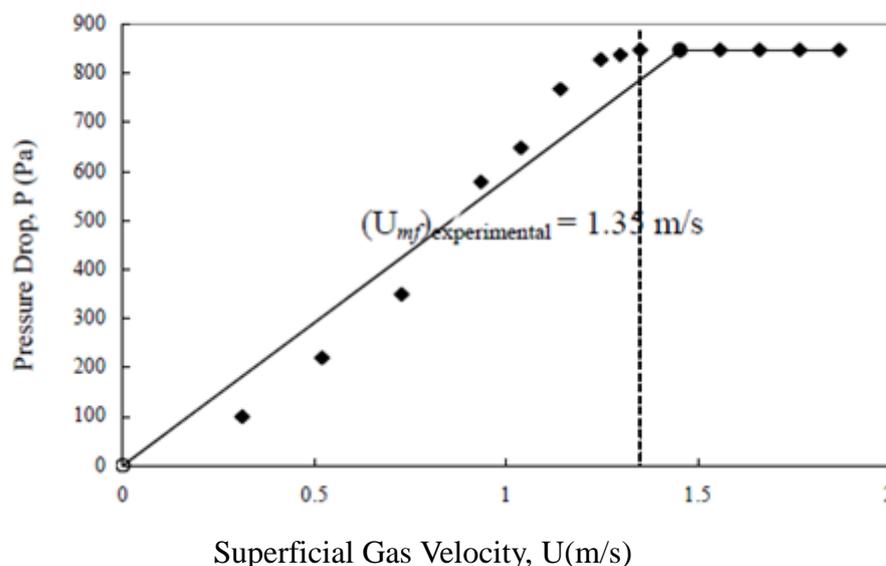


Figure 2.1: Pressure drop versus superficial gas velocity (at increasing gas flow rate) for initially mixed/segregated mixtures (S.M. Tasirin, S.K. Kamarudin and A.M.A. Hweage 2008).

Many researchers now use the kinetic theory of granular materials as part of their efforts in simulating multiphase systems. It is used in both the dilute-phase modeling of circulating fluidized beds and the dense phase modeling of bubbling fluidized beds. The granular kinetic theory is also found in multiphase modeling within the commercial simulation software FLUENT, with Benyahia using an early version of FLUENT in their simulations of dilute-phase riser flow. Arastoopour were the first to consider polydisperse systems and successfully computed pressure drop effects in dilute riser flow (Scott Cooper, Charles J. Coronella 2004).

At the simulation study, a 2D CFD model was used to describe the gas–solid two-phase flow in fluidized bed polymerization reactors. The effects of some important input parameters on the flow field were investigated. The model was validated by comparing the pressure drop and the minimum fluidization velocity data with those calculated according to the classical equation. The effects of distributor shape, solid particle size, operation gas velocity and the feed manner on the flow behavior in the reactor. The results show that the final fluidizations are almost the same at the plane and

triangle distributors. In addition, with the increase of the solid particle diameter, the bubble number decreases and the bubble size increases, resulting in a small bed expansion ratio. Both the bubble number and the bed expansion ratio increase with the increase of the gas inlet velocity. There exists a tempestuous wiggle from side to side in the bed at the continuous feed manner, which cannot be found at the batch feed manner. Further studies on the CFD model for the gas–solid two-phase flow in FBR are in progress in our group (Xi-Zhong Chen, De-Pan Shi, Xi Gao, Zheng-Hong Luo 2010).

Relate to this project the straight cylindrical or columnar fluidized beds are the majority of the gas-solid fluidization studies. There is another kind of fluidized beds, which have inclined walls. These are called tapered fluidized beds.

Tapered fluidized beds can be run swimmingly without any unstableness, which can be run with less pressure fluctuations. Tapered fluidized beds are very useful for fluidization of materials with a wide particle size distribution, as well as for exothermic reactions and also for extensive particle mixing.

In the present work, an Eulerian–Eulerian multi-fluid model, which considers the conservation of mass and momentum for the solid and gas phases, has been adopted. The kinetic theory of granular flow, which considers the conservation of solid fluctuation energy, has been used for closure.

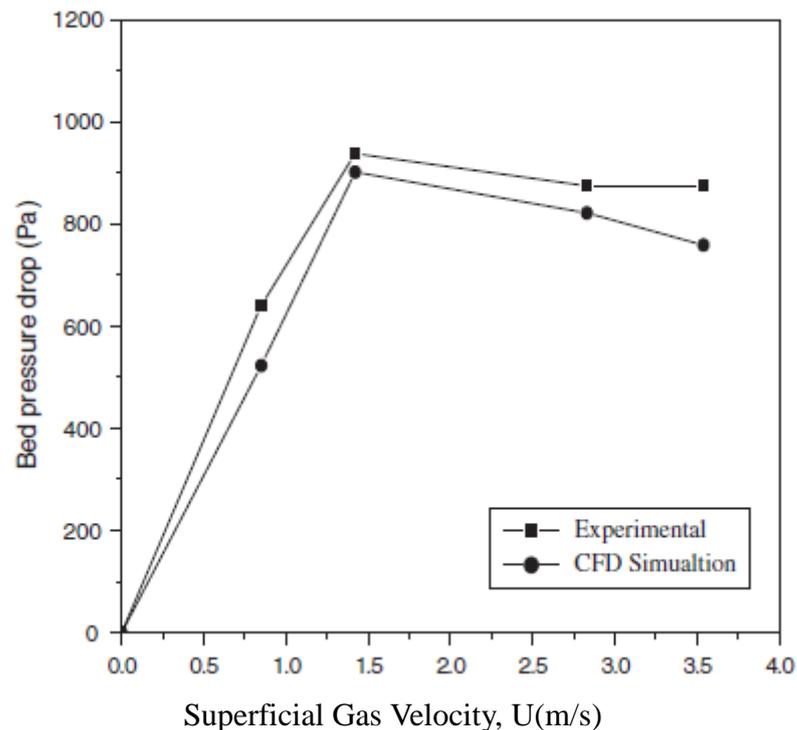


Figure 2.2: Comparison Plot of Experimental Bed Pressure Drop with CFD Simulation using Gidaspow drag model (particle = glass bead, diameter = 2 mm, Initial static bed height = 6.5 cm) (D.C. Sau & K.C. Biswal 2010).

The floating gas-solids fluidized bed has been applied as a binary fluidized bed and it was shown that its appearance may vary from well-mixed to completely separate. Visual observation showed that intermediate mixing regimes could exist, as well as the extreme situations of complete separation and good mixing of particles. These observations were supported by the interpretation of measured pressure-drop profiles due to the presence of particles: different degrees of mixing were reported, varying from completely separated to intermediately and well-mixed (G. Kwant W. Prins W.P.M. van Swaaij 1994).

Another type of distributor is tuyer type air distributor. A Tuyer type air distributor plate was selected, consisting of a plate with vertical nozzles with lateral perforations through which passes the air that is distributed uniformly into the reactor. This alternative was selected due to its convenience for use with high temperatures and its advantage of reducing the backflow of bed material toward the plenum. Table 2.1

shows the necessary parameters for the air distribution plate design considered for the most homogenous material of the bed and sand.

Table 2.1: Particle separator dimensional and operational characteristics

Parameter	Value
Cyclone diameter (mm)	190.5
Cyclone gas exit diameter (mm)	95.25
Cyclone body cylindrical height (mm)	285.75
Cyclone total height (mm)	762
Cyclone solids exit diameter (mm)	71.4
Separation efficiency (%)	99.7
Pressure drop (kPa)	0.46

Source: Ramirez, Martinez and Petro (2007)

From the mass flow of the product gas in the gasification process (mass balance), and its density, the gas volumetric flow at the cyclone inlet for the operating conditions of the gasifier was calculated (approximately 750 °C and 101,325 kPa). Table 7 shows the dimensions of the designed cyclone, along with its efficiency and pressure drop.

Table 2.2: Calculated parameters for the distribution plate

Parameter	Value
Pressure drop in the bed (kPa)	6.05
Tuyer orifice diameter (mm)	2.38
Pressure drop in the distributing (kPa)	1.1
Tuyer internal diameter (mm)	7.94
Air velocity for the orifice (m/s)	36
Total number of tuyers	24
Tuyer height (mm)	4

Source: Ramirez, Martinez and Petro (2007)

Table 2.3: Design parameters for the air distribution plate

Parameter	Value
Fluidization velocity (m/s)	0.7
Min. fluidization velocity (m/s)	0.07
Max. fluidization velocity (m/s)	0.47
Particle density (kg/m^3)	2650
Mean particle size (μm)	385
Bed porosity	0.46
Bed zone diameter (m)	0.3
Number of tuyer lateral orifices	4

Source: Ramirez, Martinez and Petro (2007)

Using the model of calculation proposed in literature (Basu, 1984) the results presented in Table 4 were obtained (J. J. Ramirez, J. D. Martinez, S. L. Petro 2007).

2.5 FLUID VELOCITIES

There are many kinds of velocity have been studied in journals. First is fluidized velocity of the particles. Second is bubble rise velocity. Third is fluid flow velocity. Forth is superficial gas velocity. The objects of the velocity which have been studied are particles, fluid and bubbles.

From one journal, they study proved that, Lacey index, M capable to determine the performance of particle mixing and recommend the bubbling fluidized as a good alternative for solid mixing. Finally the optimum parameters for solid mixing in this study was determined the bed depth of 17 cm with the gas velocity $1.38 U_{mf}$ that give highest Lacey mixing index. This study also proved that the superficial velocity of air higher that U_{mf} , capable to reduce the effect of bed height to the mixing process (S.M. Tasirin, S.K. Kamarudin and A.M.A. Hweage 2008).

2.6 PARTICLES MIXING AND SEGREGATION PHENOMENA

Various models have been proposed to describe structural phenomena such as segregation, mixing, and layer compositions in binary particle systems (Di Felice, 1993; Gibilaro et al., 1985; Juma and Richardson, 1979, 1983; Dutta et al., 1988; Kennedy and Bretton, 1966; Asif and Petersen, 1993). Experimental and empirical results for the pressure and concentration profiles that exist in binary systems have been used to make predictions of the solids concentration in segregated systems. Kennedy and Bretton (1966) and A-Dibouni and Garside (1979) predicted binary segregation using a model that matched the diffusive and convective fluxes of each component. Other phenomena such as layer inversion have also been studied (Moritomi et al., 1982; Van Duijn and Rietema, 1982; Epstein and LeClair, 1985; Matsuura and Akehata, 1985; Gibilaro et al., 1986; Syamlal and O'Brien, 1988; Di Felice et al., 1988; Jean and Fan, 1986; Patwardhan and Tien, 1985). Correspondence concerning this article should be addressed to M. A. Burnr. Current address of K. D. Seibert: Merck and Co., Inc., P.O. Box 2000, RY50D-207, Rahway, NJ 07065. An example of a structural phenomenon seen in a mixed particle liquid-fluidized bed is classification. Classification is the result

of the stable fluidization of particles with nonuniform particle diameters and/or densities. The changing hydrodynamic forces on the particles cause them to segregate or “classify” with larger particles gravitating toward the bottom of the bed and smaller particles toward the top. Classified beds are currently used industrially in the isolation of adsorbing solutes (Gailliot, 1990; Draeger and Chase, 1990; Chase and Draeger, 1992; Chase, 1994; Batt, 1995). Knowledge of the fluidization characteristics, the operating parameters, and the physical properties of the particles/ bed is important in this type of application in order to maintain the stable classified structure.

2.7 BUBBLING

A multi-fluid computational fluid dynamics (CFD) model based on kinetic theory of granular flow and Eulerian–Eulerian approach for binary mixture of particles was presented. The multi-fluid model with gas phase and two particle phases of either different particle sizes or densities is used to simulate flows in bubbling gas–solid fluidized beds. The flow behavior of particle mixing or separation in bubbling fluidized beds was numerically predicted. Details of particle collision information were obtained through tracing particle motions based on Eulerian–Lagrangian approach coupled with the discrete hard-sphere model. The distributions of volume fraction, velocity and granular temperature of particles of two different sizes or densities were obtained. The discrete hard-sphere modeling results quantified the granular temperatures, particle fluctuating velocities, particle phase stresses, as well as the particle shear viscosities. The simulations using both the multi-fluid model and the discrete hard-sphere model clearly indicate particle separation phenomenon in the fluidized beds, where relatively larger or heavier particles are observed near the bed bottom than at the bed top region while relatively smaller or lighter particles were found at bed top than at the bed bottom. Better particle mixing can be obtained by increasing the fluidizing velocity (Lu Huilin, ZhaoYunhua, Jianmin Ding, Dimitri Gidaspow, LiWei 2006).

Sun and Battaglia 2006 performed simulations with and without particle rotation to study segregation phenomena in a bi-dispersed bubbling gas-fluidized bed using a multi-fluid Eulerian model. They claimed that with particle rotation in the kinetic theory model and slightly friction considered the multi-fluid model better

captures the bubble dynamics and time-averaged bed behavior.

The distribution of particle mass fraction along the bed height for binary mixture with same particle densities but diameters has been experimentally studied in a bubbling fluidized bed (Huilin 2003).

These are the equations of calculate the mean bubble volume fraction.

$$U_{mf} = \frac{\mu}{\rho g d_p} (\sqrt{33.7^2 + 0.0408 Ar} - 33.7) \quad (2.7)$$

$$Ar = d_p^3 \frac{g}{\mu^2} (\rho_p - \rho_g) \rho_g \quad (2.8)$$

$$D_b(z) = 0.54 (U - U_{mf})^{0.4} (z + 4\sqrt{s^\circ})^{0.8} g^{-0.2} \quad (2.9)$$

$$U_b(z) = 0.71 \sqrt{g D_b} + U - U_{mf} \quad (2.10)$$

$$\varepsilon_b(z) = \frac{U - U_{mf}}{U_b} \quad (2.11)$$

$$\bar{\varepsilon}_b = \frac{1}{H} \int_0^H \varepsilon_b(z) dz \rightarrow \bar{\varepsilon} = 1 - (1 - \bar{\varepsilon}_b)(1 - \varepsilon_{mf}) \quad (2.12)$$

CHAPTER 3

METHODOLOGY

3.1 STUDY INTERNAL AIR FLOW

The first step of this project is to study internal air flow in fluidized bed. There are some boundary-conditions must be concerned in this case. First, the nozzle is designated as “velocity inlet” where the direction of gas flow is normal to the surface, gravity should be concerned. Secondly, the inlet velocities are very high so turbulent air flow is assumed. Thirdly, in this model there can be no compressible flow, inviscid flow or chemical reactions involved. Fourthly, in order to model the transient nature of fluidized bed, a non-steady state, Eulerian multiphase model will be used. Last, outlet of the fluidized bed is open to the environment.

3.2 CFD SIMULATION STUDY

CFD simulation is to use software to calculate the fluid flow. For Ergun 6.2 software, the fluidized bed models already build in. So, it needs to import basic data of particles and properties of distributors. Flow Simulation is a program which is included in Soliworks 2012. 3D model of fluidized bed must be drawn by using Solidworks.

3.3 ERGUN 6.2

To simulate the fluidized bed, Ergun 6.2 is one of the basic software which for design, study and modeling of bubbling and circulating fluidized beds and their peripherals.

3.3.1 Ergun 6.2 simulation

There are three types of sand have been used in this simulation by using Ergun 6.2. These are shown in Table 3.1:

Table 3.1: Table of Sand Properties

	ρ	dp
Sand 1	2167.055 kg/m ³	0.6809 mm
Sand 2	2333.65 kg/m ³	0.8301 mm
Sand 3	4111.7 kg/m ³	1.25 mm

These three types of sand are collected from Kuala Pahang area.

The environment of Ergun simulation is that temperature of air is 298.2 K, the viscosity of air is 1.8270×10^{-5} Ns/m². The density of air is 1.18 kg/m³. The modeling of fluidized bed is built in the software. Researchers must set the different input value the get the simulation result.

3.4 SOLIDWORKS 2012 FLOW SIMULATION

SolidWorks is one of the most popular 3D CAD (computer-aided design) software in mechanical field which runs on Microsoft Windows operation system. Flow Simulation is the fluid simulation program which is included by SolidWorks software. So, after mechanical design, the design parts can be simulated directly by using Flow Simulation.

3.4.1 Solidworks Model

As many components are not complex, when drawing they can be divided into several small parts and then assembly them together. After this, the model can be modified easier and computational analyzed by software, and also the different size of distributor can be changed nimbly. Figure 3.1 shows the 2mm and 3mm hole distributor.

Figure 3.2 shows the 4mm and 5mm hole distributor. Figure 3.3 shows the dimension of the fluidized bed.

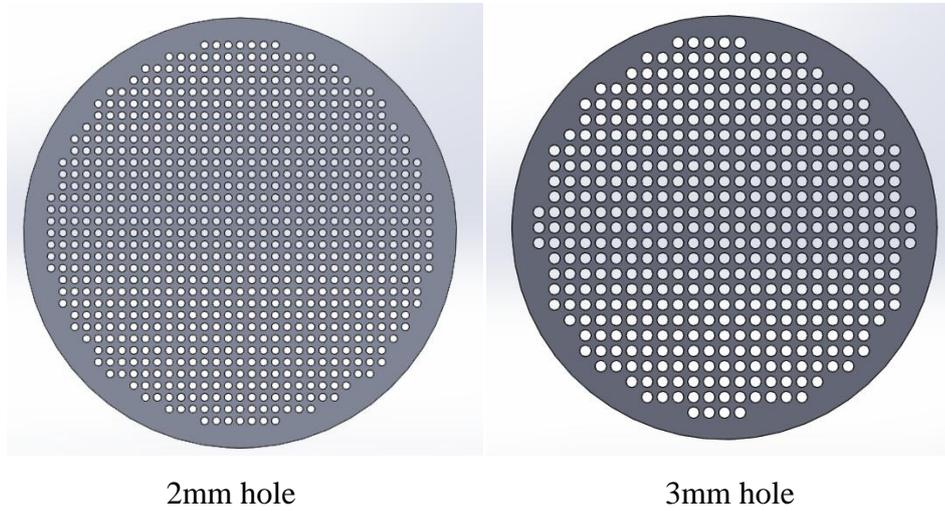


Figure 3.1: Design of Distributors 2mm and 3mm Linear Pattern

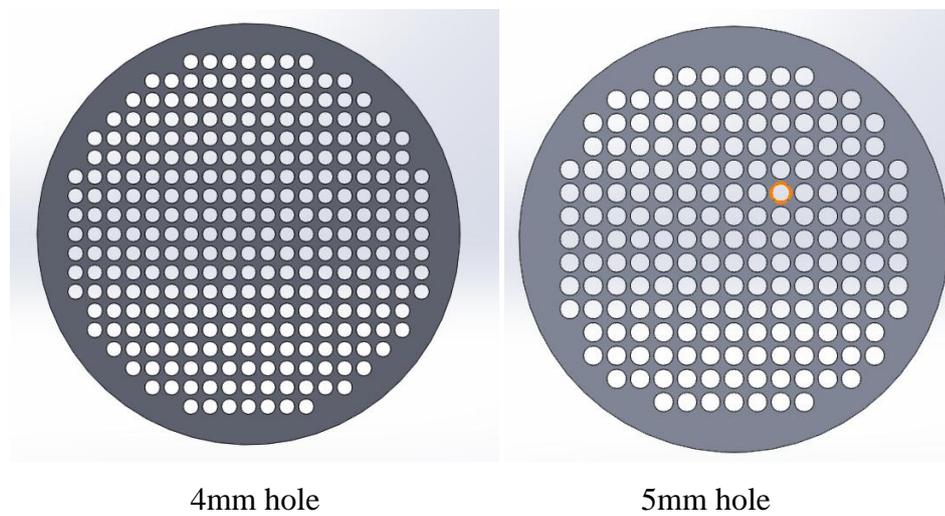


Figure 3.2: Design of Distributors 4mm and 5mm Linear Pattern

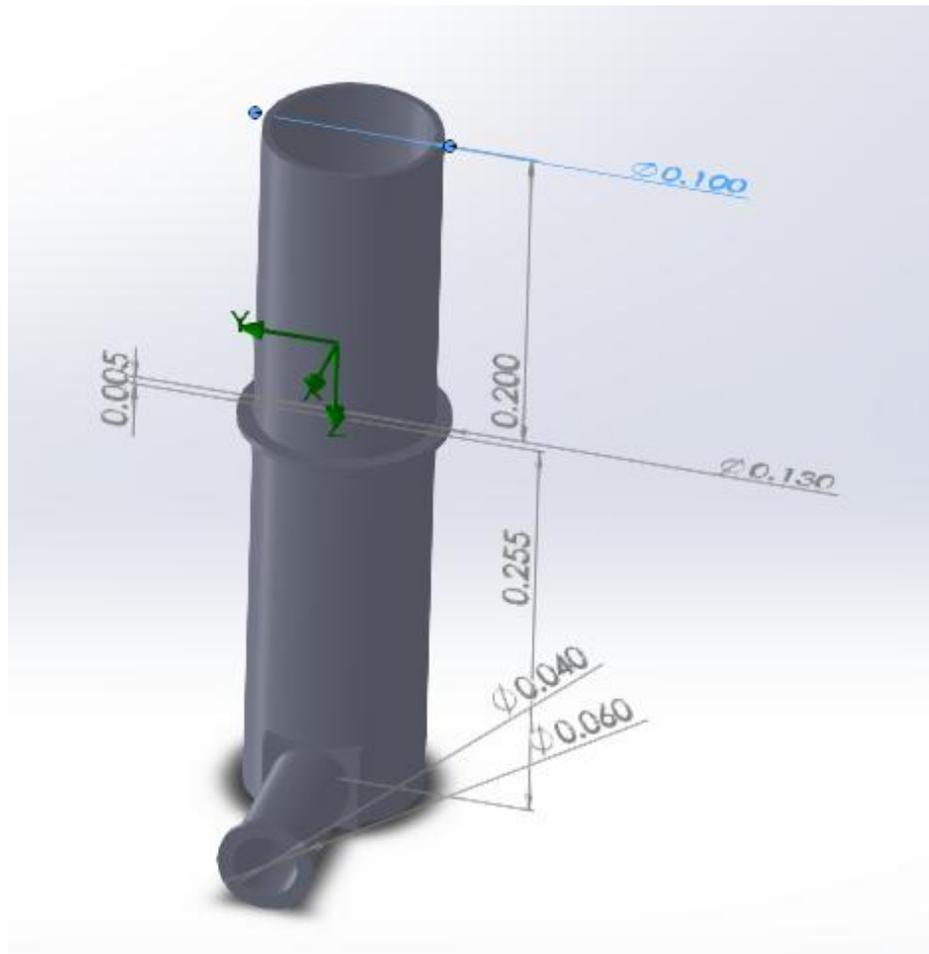


Figure 3.3: Dimension of the design

3.4.2 Solidworks Flow Simulations

Flow Simulation is an add-in program which is based on Solidworks 2012. To run the Flow Simulation the 3D geometry parts must be browsed in Solidworks.

Flow Simulation steps are shown from Figure 3.4 to Figure 3.12.

1. Select Flow Simulation icon

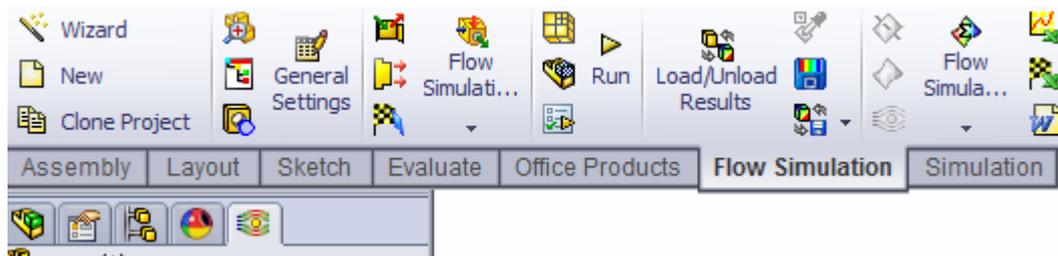


Figure 3.4: Solidworks tool bar

Figure 3.4 shows the Flow Simulation program in the Solidworks 2012 software.

2. Create lids

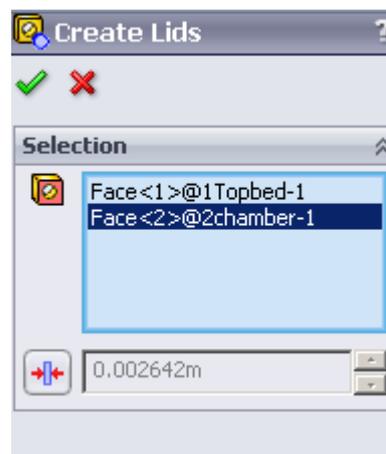


Figure 3.5: Create lids

Figure 3.5 shows there are two lids must be created which are inlet surface and outlet surface. The function of the lids is to present the inside fluid volume. And also

inlet and outlet boundary conditions are easy to set on the lids.

3. Select analysis type as internal flow and set the gravity

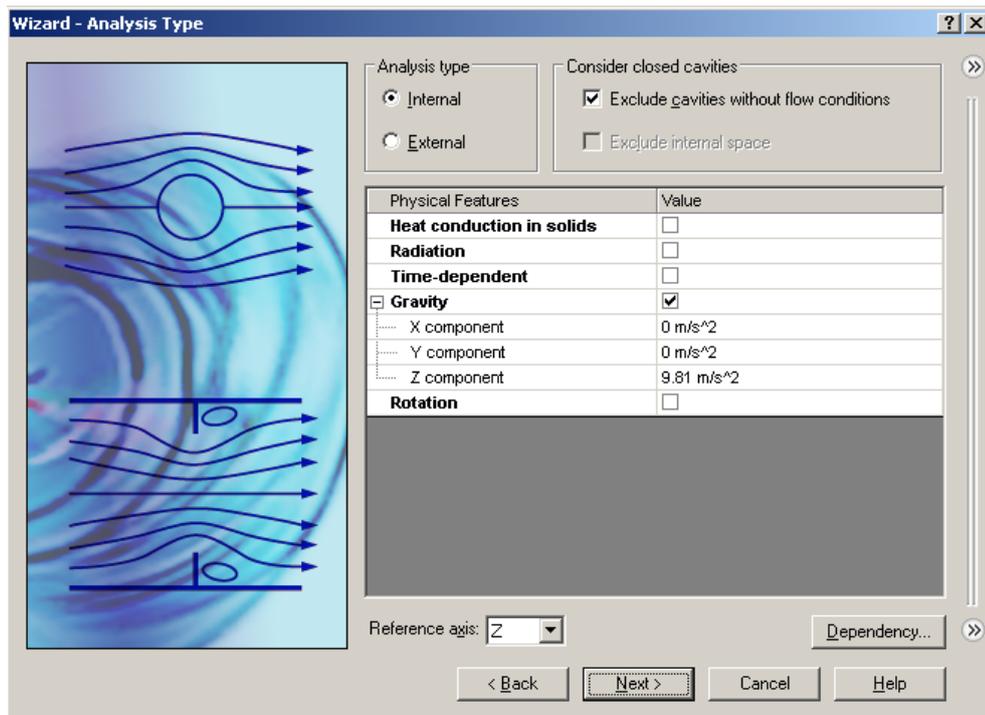


Figure 3.6: Gravity and flow type setting

Figure 3.6 shows the gravity and flow type setting. Gravity must follow the 3D geometry which was shown in Figure 3.3. The direction of gravity is z axis.

4. Choose the fluid

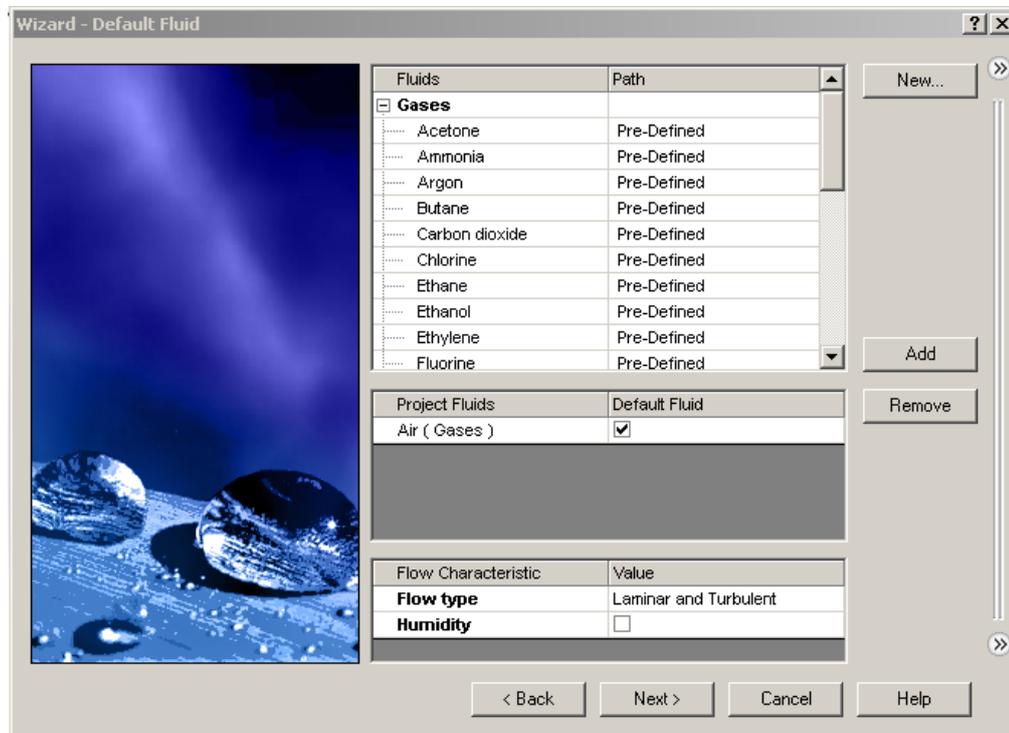


Figure 3.7: Select fluid

The fluid of this report is air. So the simulation selected air as the fluid.

5. Set the result resolution which level 8 is the best

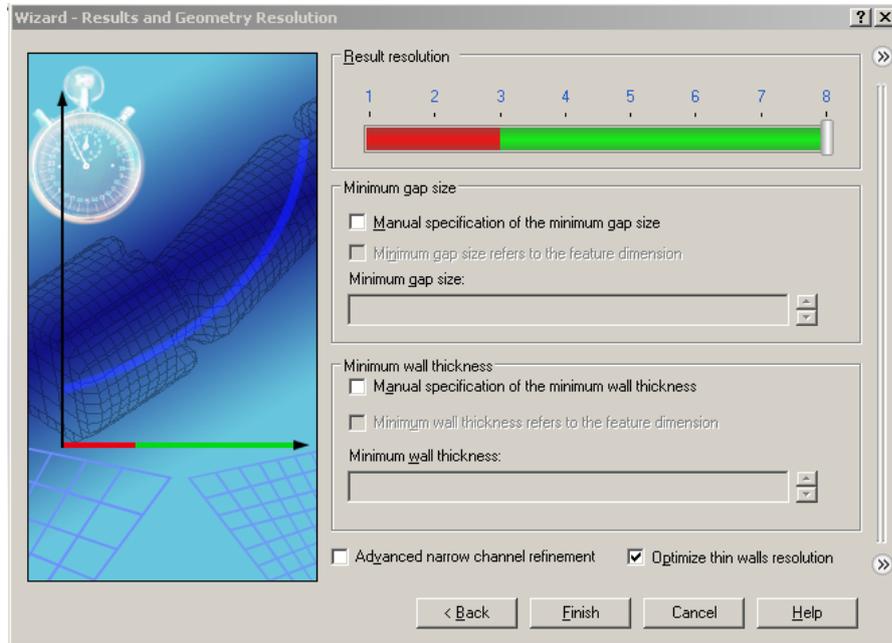


Figure 3.8: Result and geometry resolution setting

Figure 3.8 shows the result resolution was set at level 8 which is the best resolution in this software. It means the CFD meshing will use the minimum meshed size.

6. Set the fluid subdomain

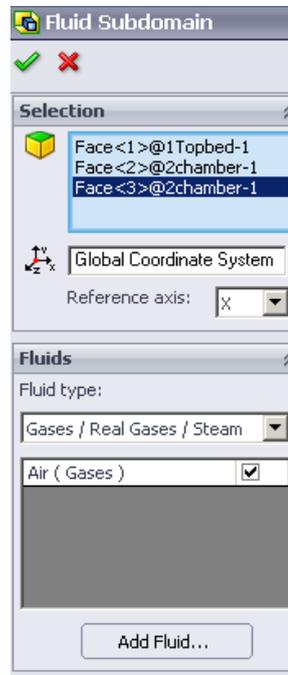


Figure 3.9: Subdomain setting

Figure 3.9 show the subdomain setting. This subdomain is the part of the simulation which should be computed. It is the operation area.

7. Set the boundary conditions

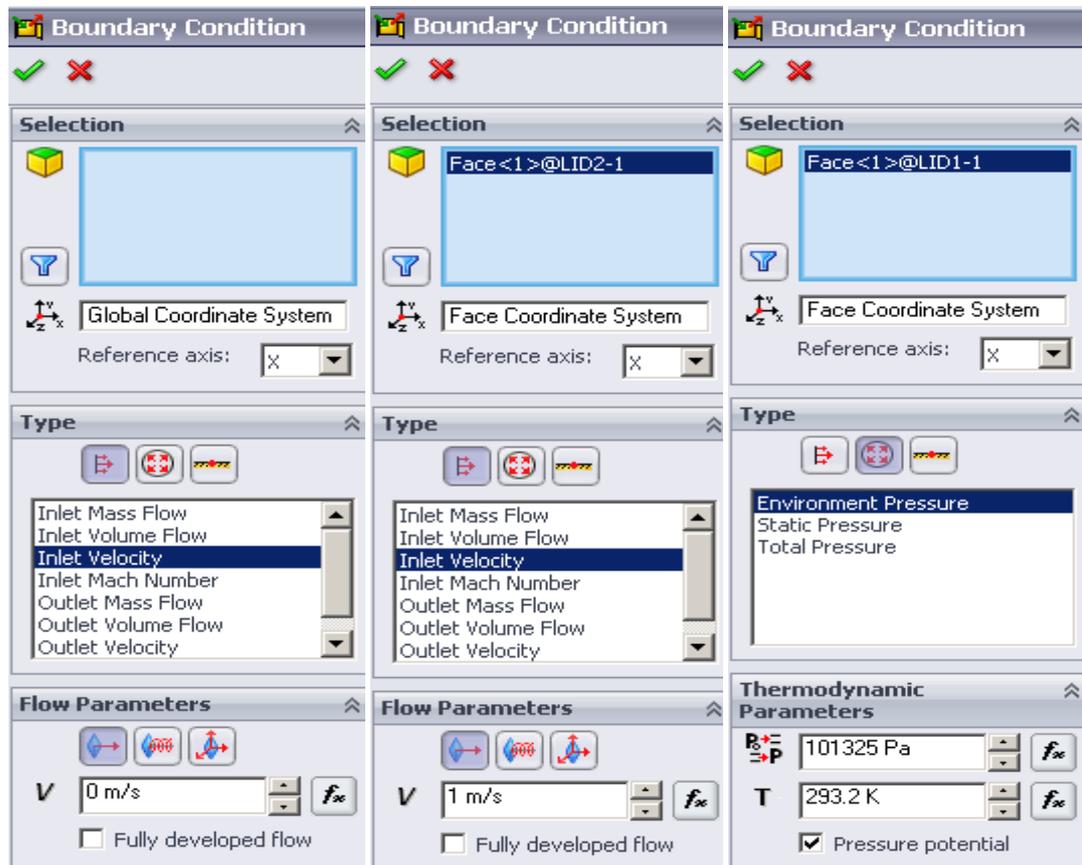


Figure 3.10: Boundary conditions setting

Inlet velocity and environment pressure have been set as shown in Figure 3.10.

8. Run the calculation

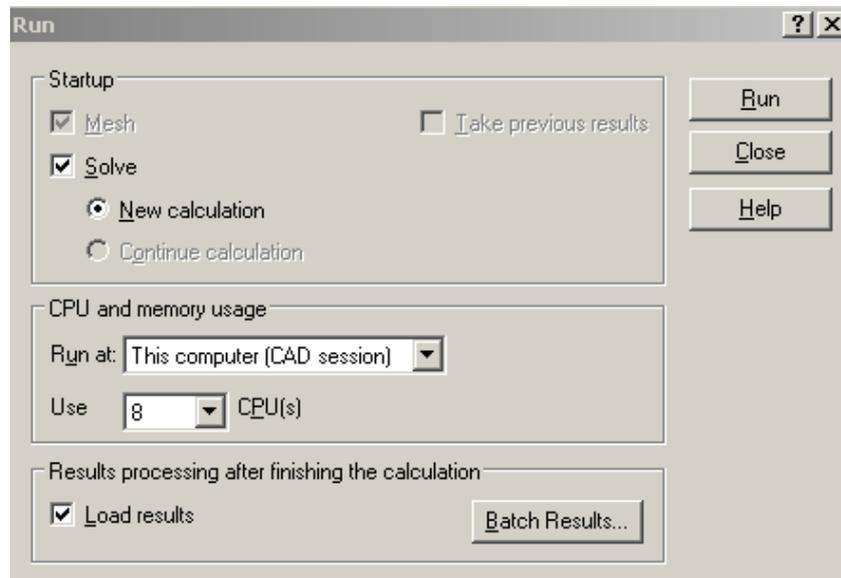


Figure 3.11: Run the calculation

After all the setting and simulation which is operated by Flow Simulation. The results are shown as Figure 3.12.

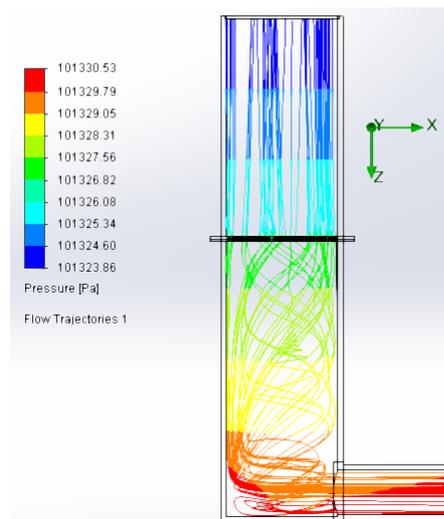


Figure 3.12: Example of air flow result

This Figure 3.12 shows the air flow inside the fluidized bed and the pressure drop can be calculated by using the color bar. The hole size of distributor are from 2mm, 3mm, 4mm, and 5mm. The inlet air velocities are 1m/s, 2m/s, 3m/s, 4m/s, and 5m/s. After all the simulation and calculation, draw the pressure drop table.

3.4.3 Flow chart of Flow Simulation

Figure 3.13 shows the steps of Solidworks 2012 flow simulation.

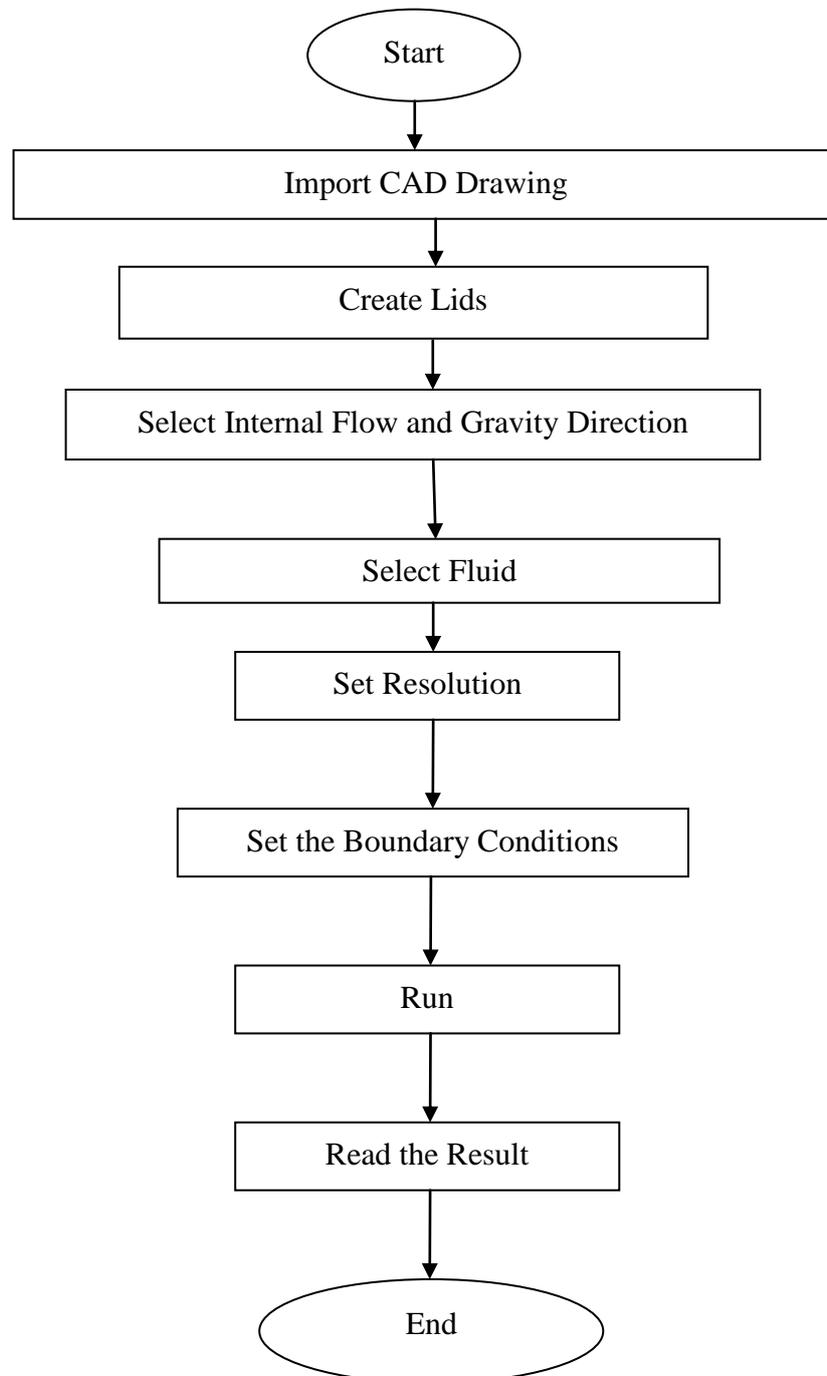


Figure 3.13: Flow simulation flow chart

3.5 FLOW CHART OF FYP

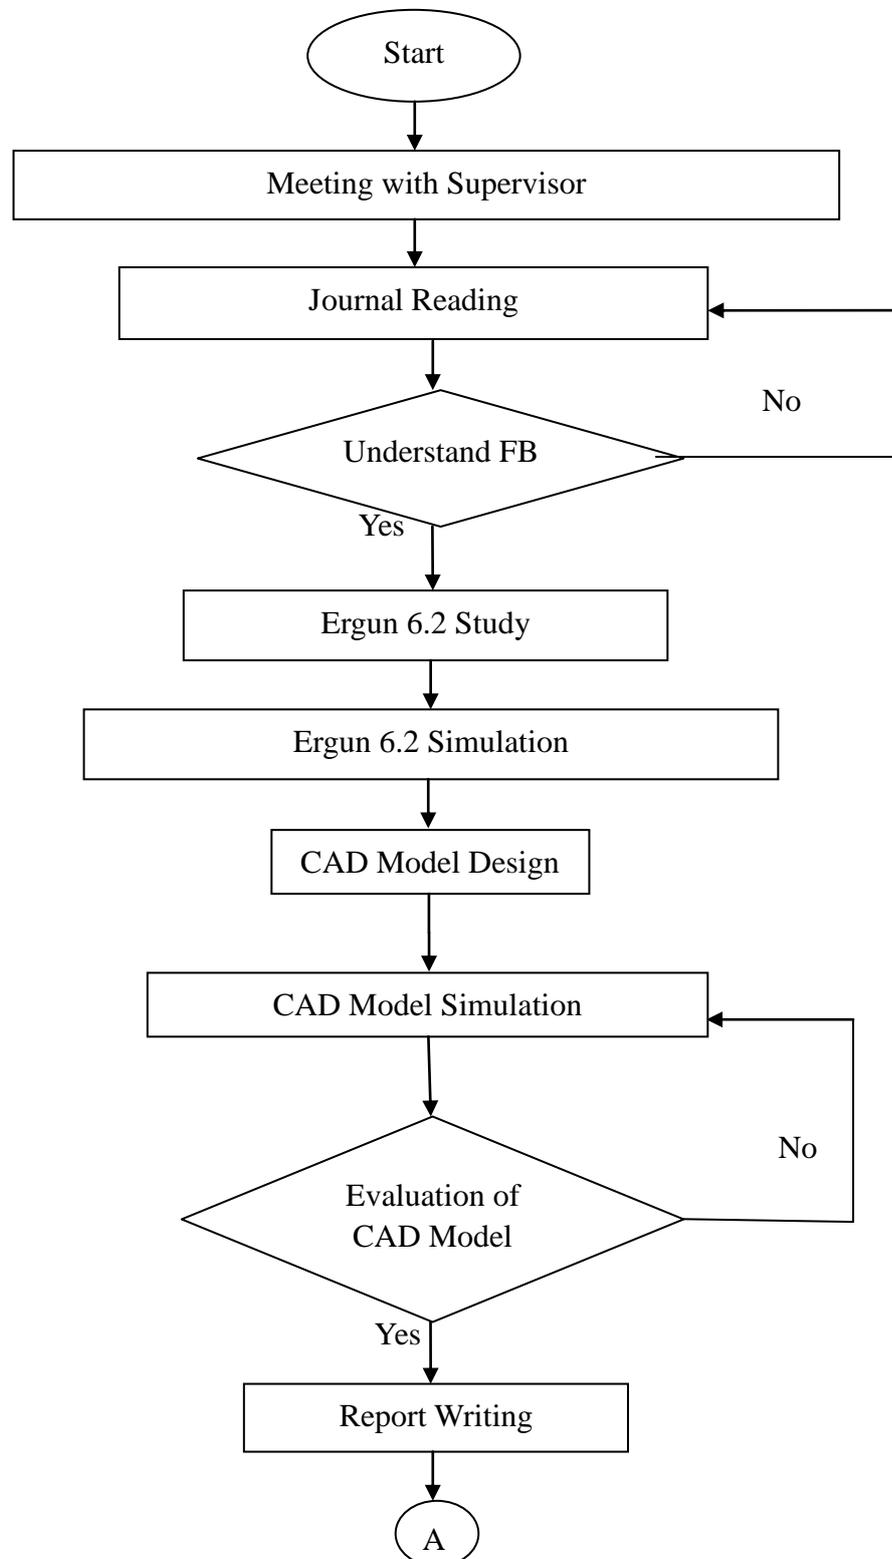


Figure 3.14: FYP 1 flow chart

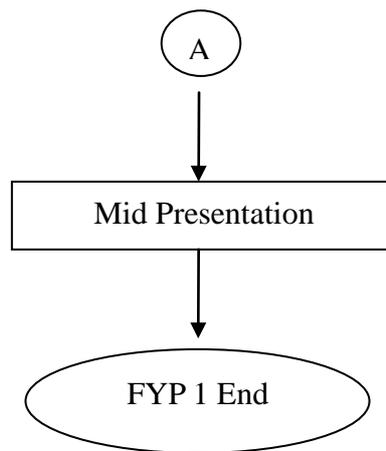


Figure 3.15: Continue Figure 3.14

Figure 3.14 and Figure 3.15 show the steps of final year project 1. These steps must finish in 12 weeks. Final year project 2 has been shown in Figure 3.16. When FYP 1 and FYP 2 have been done, all the Final Year Project has been done.

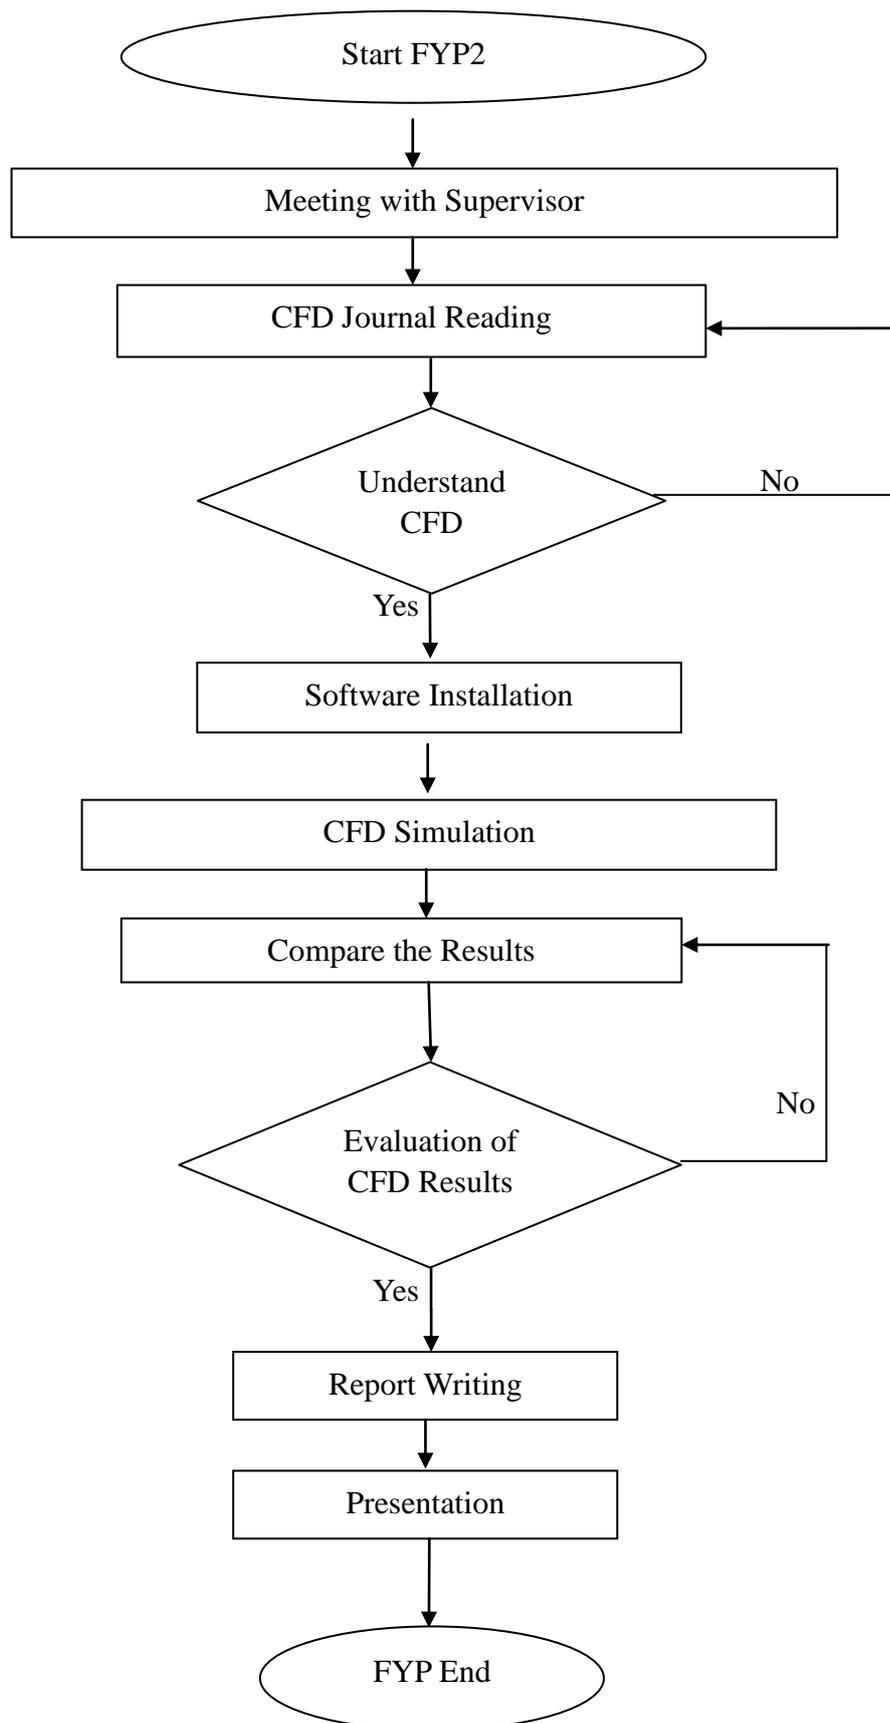


Figure 3.16: FYP 2 flow chart

CHAPTER 4

RESULT AND DISCUSSION

4.1 SYNOPSIS

As mentioned in the previous chapter, two kinds of simulations were conducted to achieve the two objectives for this project. Note that, some of the results from this simulation show the same pattern as other simulation. Next topics show the result of all the simulations. The simulation particle mixing that viewed using software Ergun 6.2. The simulation of air flow and that viewed using software Solidworks 2012 Flow Simulation, the pressure drop can be calculated by this results.

Ergun 6.2 is professional software which can run the fluidized bed only. So all the setting in Ergun 6.2 is prepared to run fluidized bed simulation. The target is to find out the operation point of particle simulation.

Solidworks 2012 Flow Simulation is CFD software which can make different CFD simulation. So it is very important to make the 3D drawings were in the stable condition before meshing can be started. The same geometry parts run the different air speed must keep the same meshing size and calculation. The target is to find the minimum pressure drop by using different distributor and different inlet air velocity.

4.2 PARTICLE MIXING SIMULATION

There are three types of sand have been used in this simulation by using Ergun 6.2. These are shown in Table 4.1.

Table 4.1: Table of sand properties

	ρ	dp
Sand 1	2167.055 kg/m ³	0.6809 mm
Sand 2	2333.65 kg/m ³	0.8301 mm
Sand 3	4111.7 kg/m ³	1.25 mm

The temperature of air is 298.2 K, the viscosity of air is 1.8270×10^{-5} Ns/m². The density of air is 1.18 kg/m³. The sand is from Kuala Pahang.

4.2.1.1 Particle 1 simulation

The Figure 4.1, 4.4 and 4.7 are shown particle mixing and segregation in the fluidized bed which was using sand 1, 2 and 3. Y axis shows density of particle and fluid mixture. X axis shows diameter of particle. And there are four areas in these Figures, area A is aeratable, B is sand like, C is cohesive, D is injectable.

For Figure 4.1, the particle mixing point is at B area which is sand like.

Table 4.2 shows the results which were calculated by Ergun software. From the table Reynolds number is 198.61, which is laminar flow. And the minimum fluidization velocity is 0.2765 m/s. It means at this velocity when using sand 1, it start the fluidization phenomenon.

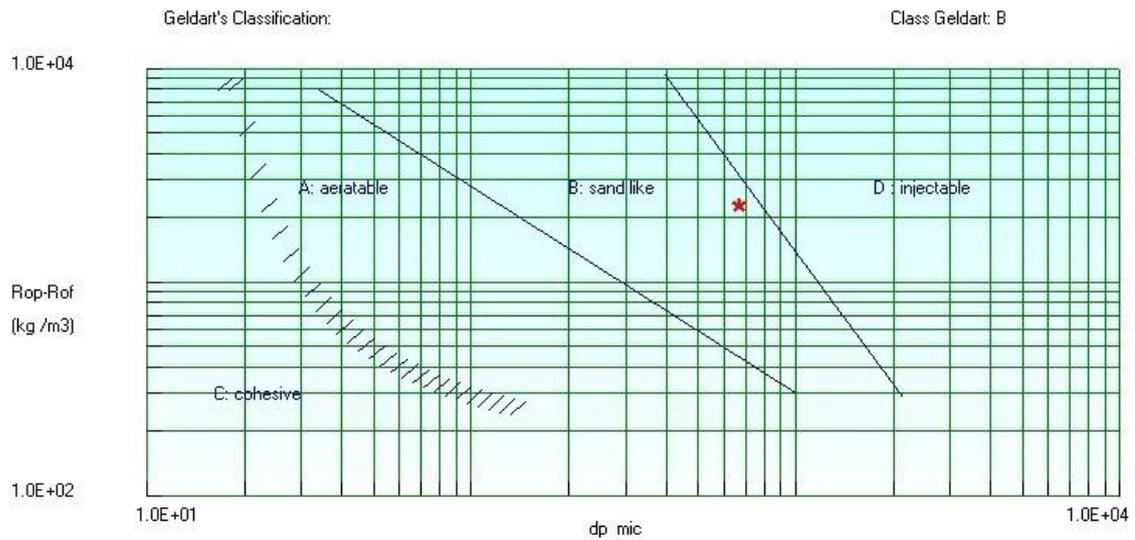


Figure 4.1: Sand 1, particle simulation (Ergun 6.2 result)

Table 4.2: Sand 1 Particle Simulation Results (Ergun 6.2 result)

Particle diameter	6.8090E-04 m
Particle density	2.1671E+03 kg/m ³
Fluid density	1.1800E+00 kg/m ³
Fluid viscosity	1.8270E-05 Ns/m ²
Raynolds number	1.9861E+02
Drag coefficient	8.0152E-01
Terminal velocity	4.5161E+00 m/s
Min. Fluidization velocity	2.7650E-01 m/s

4.2.1.2 Sand 1 Bubbling simulation

The Figure 4.2 shows operating point in the fluidized bed which was using sand 1. Figure 4.3 shows the maximum and minimum bubble diameter as well as bubble fraction at different bed height. The maximum bubble diameter is 2.004 m, and the operating bed height is 0.7581 m.

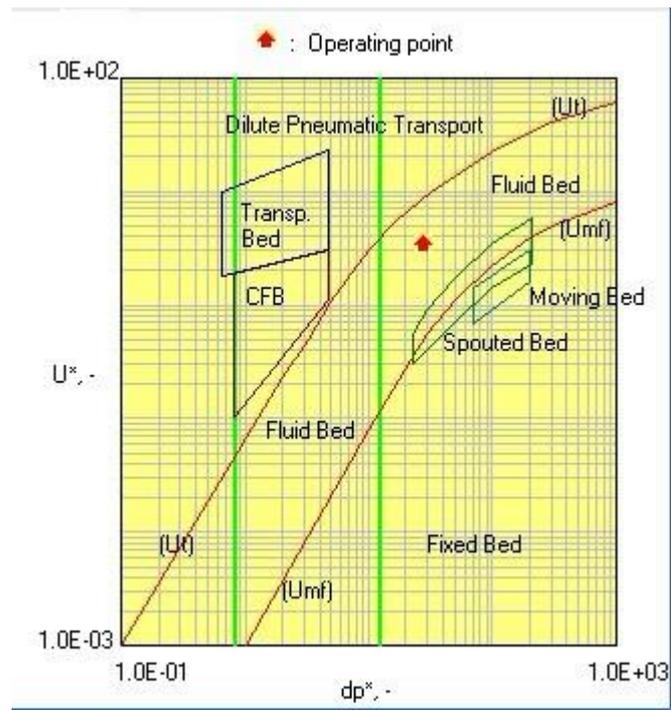


Figure 4.2: Sand 1, Bubbling Simulation of Operating Point (Ergun 6.2 result)

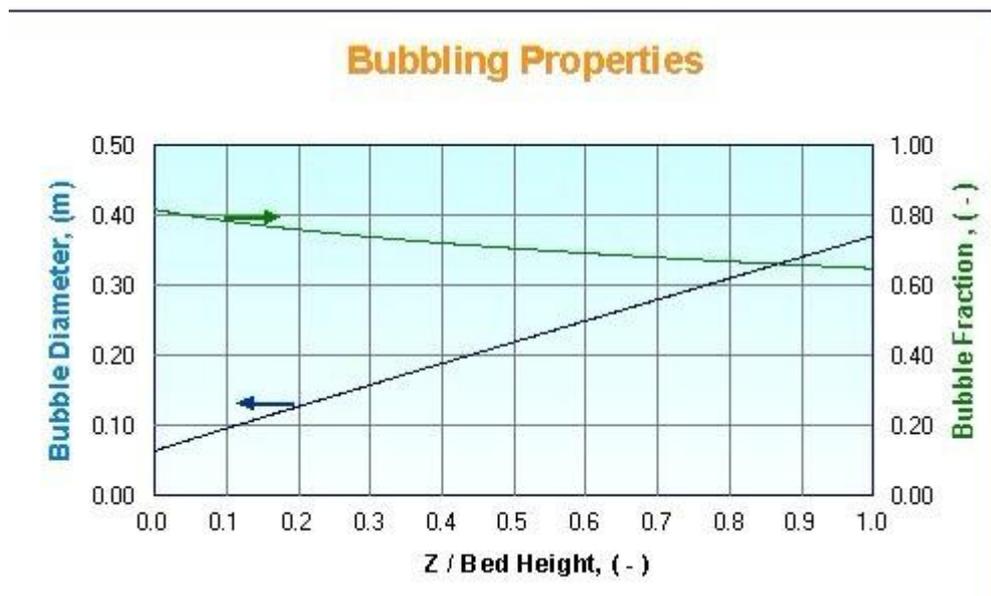


Figure 4.3: Sand 1, Bubbling Properties of Simulation (Ergun 6.2 result)

Table 4.3: Sand 1, Bubbling Simulation Results (Ergun 6.2 result)

Bubble mean diam (m)	2.175E-01
Bed mean voidage	8.470E-01
Bubbles void fraction	7.362E-01
Bubble rise velocity (m/s)	3.292E00
Bubble rise time (s)	1.265E-01
Bubble max diameter (m)	2.004E01
Bubble/suspension area(m ²)	2.031E01
Pressure drop at Umf (Pa)	2.466E03
Operating bed height (m)	7.581E-01
Bed height at Umf (m)	2.000E-01
Initial bed voidage (m)	4.200E-01
Min. Fluidiz. Velocity (m)	2.765E-01

4.2.2.1 Particle 2 Simulation

The Figure 4.4 is shown particle mixing and segregation in the fluidized bed which was using sand 2. The particle mixing point is at D area which is injectable. Table 4.4 shows the results which were calculated by Ergun software. From the table Reynolds number is 305.27, which is laminar flow. And the minimum fluidization velocity is 0.39702 m/s. It means at this velocity when using sand 1, it start the fluidization phenomenon.

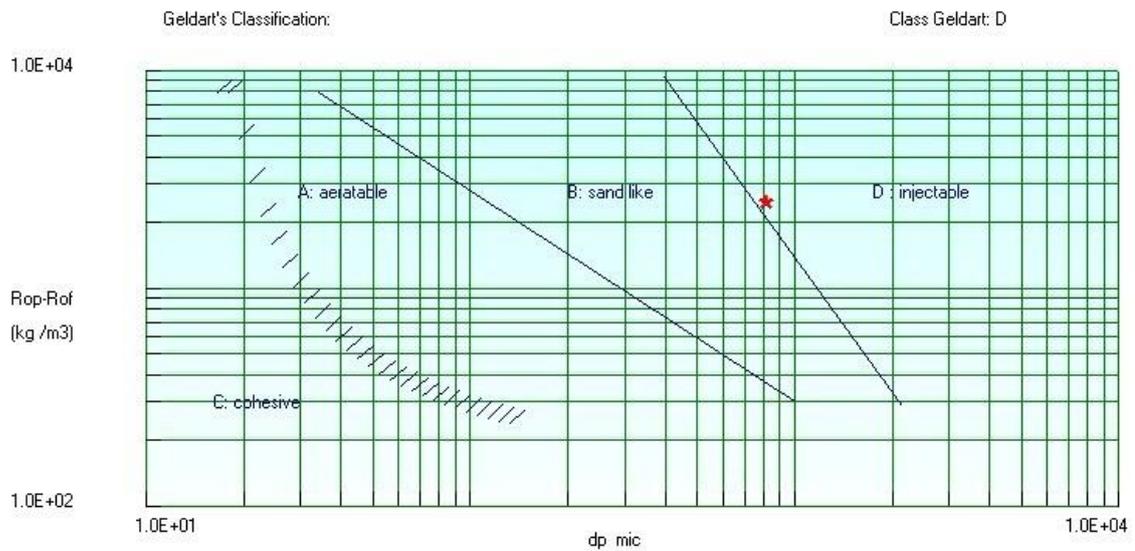


Figure 4.4: Sand 2, particle simulation (Ergun 6.2 result)

Table 4.4: Sand 2, Particle Simulation Results (Ergun 6.2 result)

Particle diameter	8.3010E-04m
Particle density	2.3337E+03kg/m3
Fluid density	1.1800E+00kg/m3
Fluid viscosity	1.8270E-05Ns/m2
Raynolds number	3.0527E+02
Drag coefficient	6.6199E-01
Terminal velocity	5.6939E+00m/s
Min. Fluidization velocity	3.9702E-01m/s

4.2.2.2 Sand 2 Bubbling Simulation

The Figure 4.5 shows operating point in the fluidized bed which was using sand 2. Figure 4.6 shows the maximum and minimum bubble diameter as well as bubble fraction at different bed height. The maximum bubble diameter is 2.765 m, and the operating bed height is 0.6959 m.

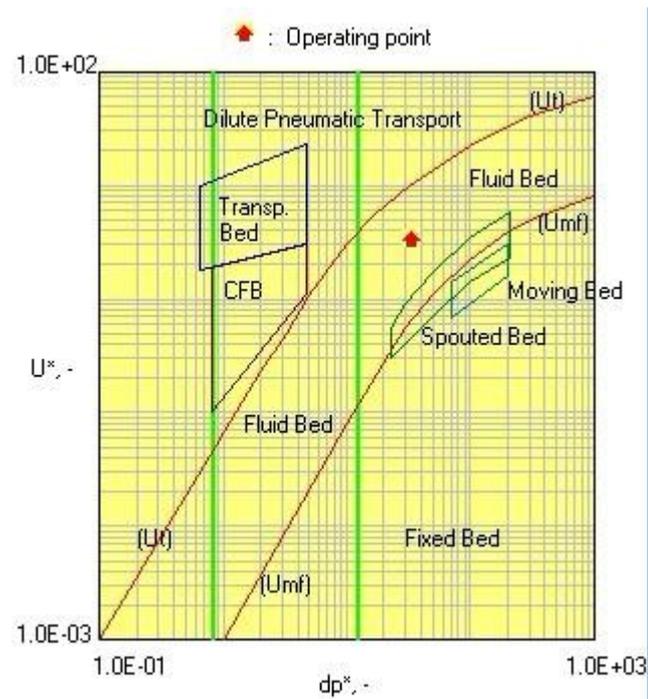


Figure 4.5: Sand 2, Bubbling Simulation of Operating Point (Ergun 6.2 result)

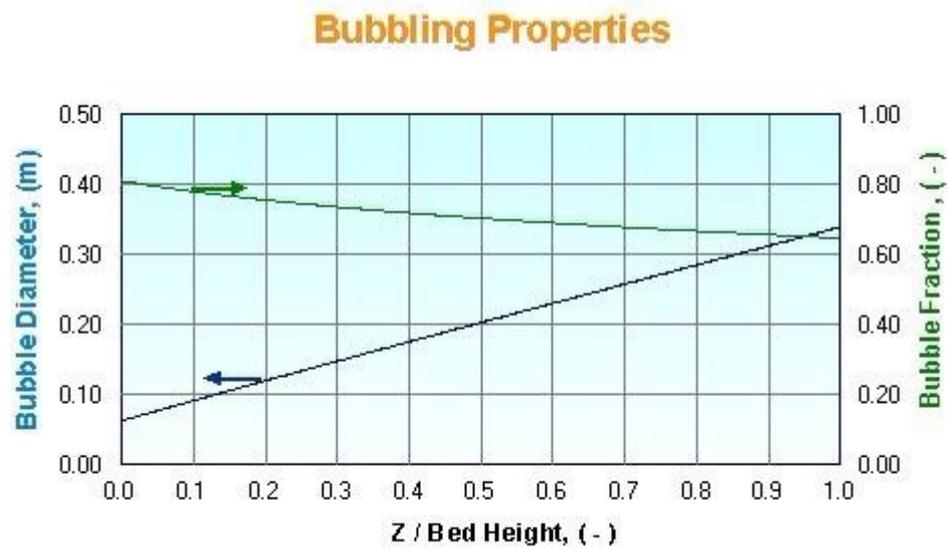


Figure 4.6: Sand 2, Bubbling Properties of Simulation (Ergun 6.2 result)

Table 4.5: Sand 2, Bubbling Simulation Results (Ergun 6.2 result)

Bubble mean diam (m)	2.111E-01
Bed mean voidage	8.333E-01
Bubbles void fraction	7.126E-01
Bubble rise velocity (m/s)	3.232E00
Bubble rise time(s)	1.173E-01
Bubble max diameter(m)	2.756E01
Bubble/suspension area(m ²)	2.026E01
Pressure drop at Umf (Pa)	2.656E03
Operating bed height(m)	6.959E-01
Bed height at Umf (m)	2.000E-01
Initial bed voidage(m)	4.200E-01
Min. Fluidiz. Velocity (m)	3.970E-01

4.2.3.1 Particle 3 Simulation

The Figure 4.7 is shown particle mixing and segregation in the fluidized bed which was using sand 3. The particle mixing point is at B area which is injectable. Table 4.6 shows the results which were calculated by Ergun software. From the table 4.6 Reynolds number is 886.50, which is laminar flow. And the minimum fluidization velocity is 0.96716 m/s. It means at this velocity when using sand 3, it start the fluidization phenomenon.

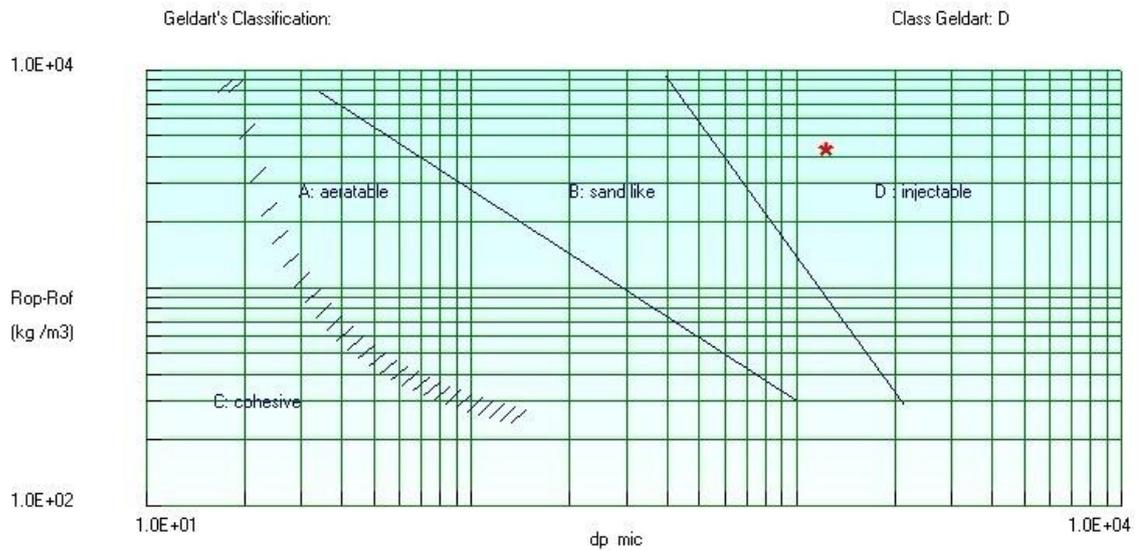


Figure 4.7: Sand 3, Particle Simulation (Ergun 6.2 result)

Table 4.6: Sand 3, Particle Simulation Results (Ergun 6.2 result)

Particle diameter	1.2500E-03m
Particle density	4.1117E+03kg/m3
Fluid density	1.1800E+00kg/m3
Fluid viscosity	1.8270E-05Ns/m2
Raynolds number	8.8650E+02
Drag coefficient	4.7237E-01
Terminal velocity	1.0981E+01m/s
Min. Fluidization velocity	9.6716E-01m/s

4.2.3.2 Sand 3 Bubbling Simulation

The Figure 4.8 shows operating point in the fluidized bed which was using sand 2. Figure 4.9 shows the maximum and minimum bubble diameter as well as bubble fraction at different bed height. The maximum bubble diameter is 8.062 m, and the operating bed height is 0.6131 m.

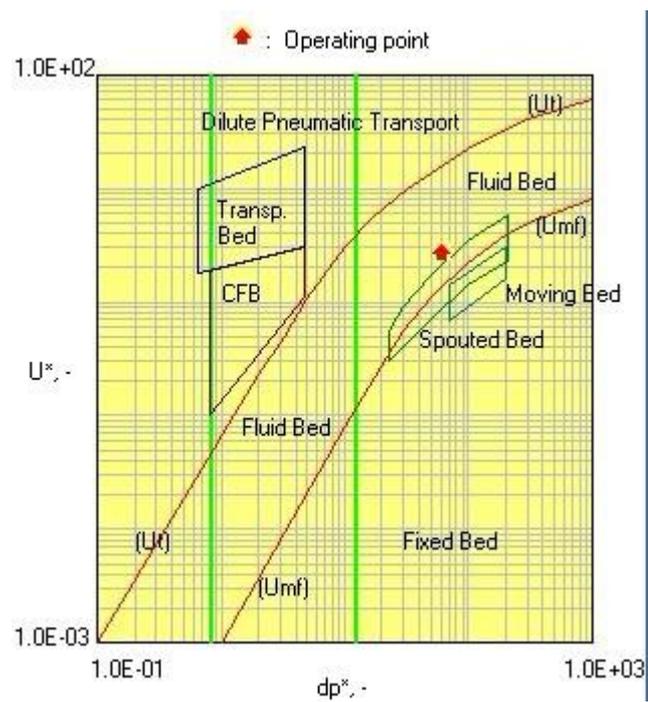


Figure 4.8: Sand 3 Bubbling Simulation of Operating Point (Ergun 6.2 result)

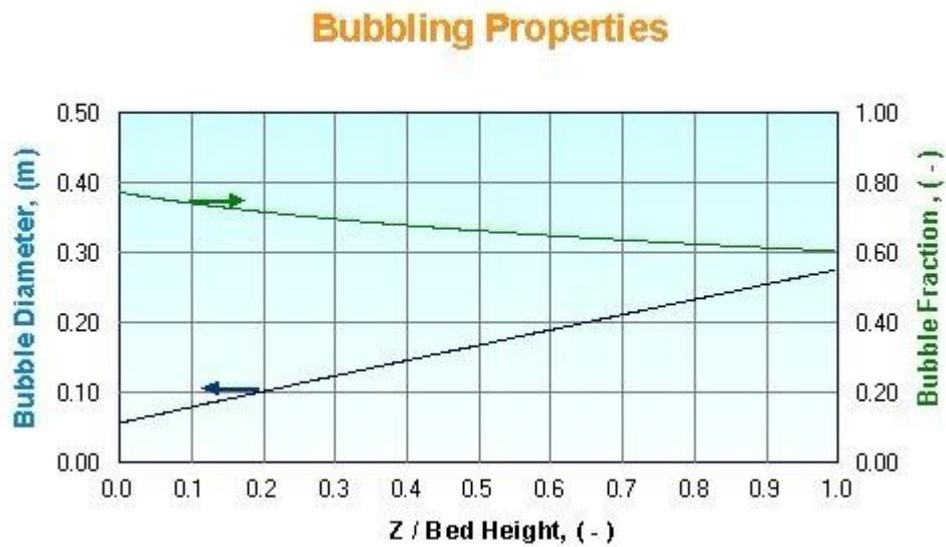


Figure 4.9: Sand 3 Bubbling Properties of Simulation (Ergun 6.2 result)

Table 4.7: Sand 3 Bubbling Simulation Results (Ergun 6.2 result)

Bubble mean diam (m)	1.715E-01
Bed mean voidage	8.108E-01
Bubbles void fraction	6.738E-01
Bubble rise velocity (m/s)	2.572E00
Bubble rise time (s)	1.163E-01
Bubble max diameter (m)	8.062E01
Bubble/suspension area(m ²)	2.357E01
Pressure drop at Umf (Pa)	4.679E03
Operating bed height (m)	6.131E-01
Bed height at Umf (m)	2.000E-01
Initial bed voidage (m)	4.200E-01
Min. Fluidiz. Velocity (m)	9.672E-01

4.3 PRESSURE DROP SIMULATION


The result and analysis for air flow through the distributor is now presented. Note that there are different designs found in this analysis compare to particle mixing simulation. The Figure of each air flow simulation that viewed using Solidworks2012 Flow Simulation software as in the Appendix B. From Appendix B, it is shown at the low velocity status the maximum pressure is located at the inlet tube. When the velocity increased, the location has been changed, where is focused on the wall which is normal to the inlet velocity.

After all the simulation, the pressure drop can be calculated and the table was drawn. The Table is shown that the pressure drop of different size of distributor at different inlet velocity. The minimum pressure drop is at 2 m/s by using 5 mm holes size distributor. And the maximum pressure drop is at the 4 m/s by using 1 mm holes size distributor.

Table 4.8: Pressure Drop of Each Distributor

	1m/s	2m/s	3m/s	4m/s	5m/s
2mm	2.22 Pa	1.14 Pa	3.79 Pa	9.38 Pa	9.0 Pa
3mm	2.16 Pa	1.95 Pa	3.24 Pa	3.75 Pa	2.95 Pa
4mm	1.34 Pa	0.95 Pa	1.41 Pa	4.35 Pa	3.1 Pa
5mm	1.37 Pa	0.89 Pa	1.37 Pa	3.95 Pa	2.85 Pa

From the table, a line chart can be drawn which is Figure. The Chart shows that, the pressure drop diverseness of each distributor at each inlet velocity. The maximum pressure drop is at 4 m/s by using 2 mm distributor. The minimum pressure drop is at 2 m/s by using 5 mm distributor. For all the distributors, the peak of pressure drop is at 4 m/s and the lowest pressure drop is at 2 m/s.

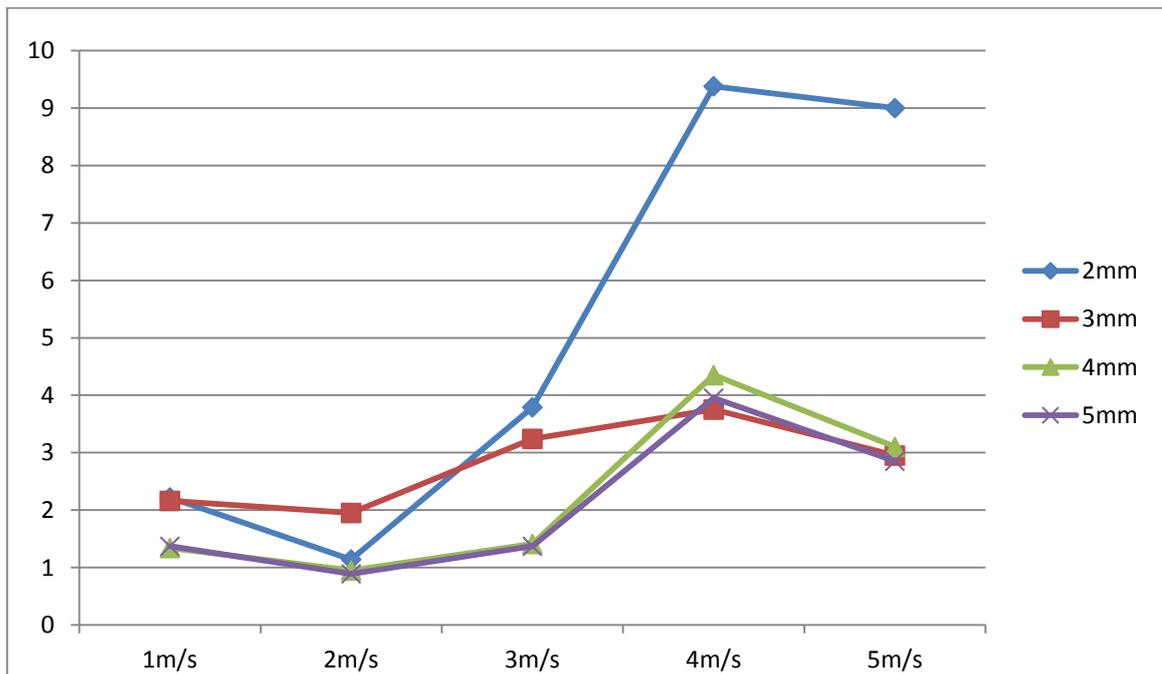**Figure 4.10:** Variation of Distributors

4.4 COMPARE WITH OTHER'S RESULT

The result from other researchers was shown the inlet velocity of minimum pressure drop is at 2.5 m/s to 3.0 m/s. Computational fluid dynamics and experimental study of the hydrodynamics of a gas–solid tapered fluidized bed by D.C. Sau, K.C. Biswal (2010).

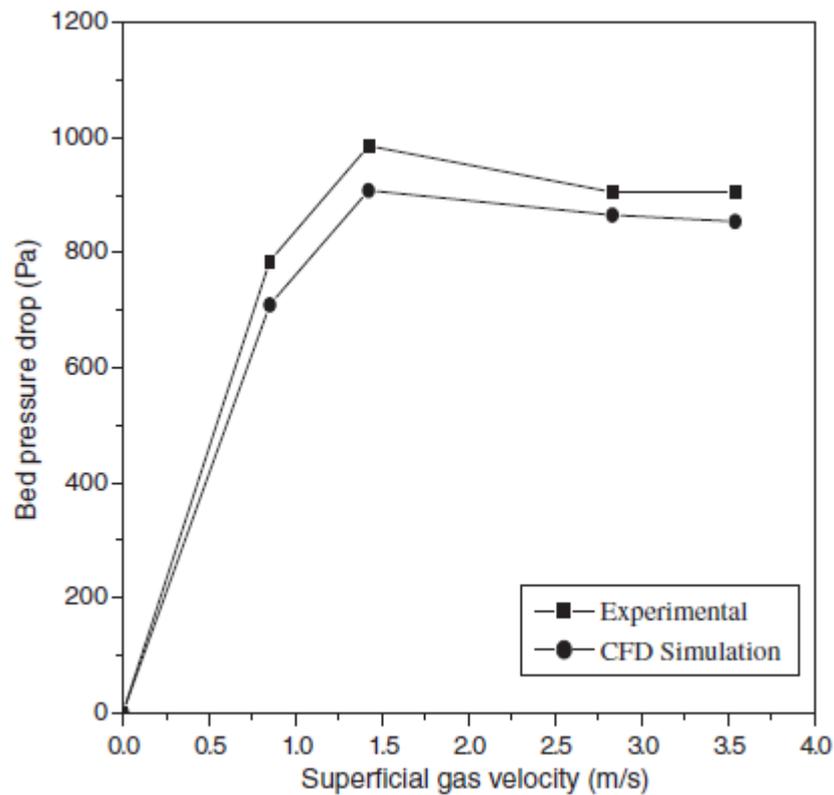


Figure 4.11: Result From Other Researcher

For this simulation the result of minimum pressure drop is at 2 m/s inlet velocity, it is closed to other's result. So the result of simulation is available.

CHAPTER 5

CONCLUSION

5.1 CONCLUSION

This report has been done the study of CFD simulation of particle mixing in a fluidized bed. The technology of fluidized bed is not new. CFD simulation in fluidized bed is advanced but also not the latest technology. It has been researched by so many researchers. The results of CFD simulation is the ideal result which is calculated by computers. It is not a real case. Simulation results can help researchers to do the experiment easier but it would be a real result.

From this project, two kinds of simulations have been done. First simulation is particle mixing simulation by using Ergun 6.2 software. For Ergun simulations, the minimum fluidization velocity has found when the different particles have been used. For sand 1, the minimum fluidization velocity is 0.2765 m/s. For sand 2, the minimum fluidization velocity is 0.39702 m/s. For sand 3, the minimum fluidization velocity is 0.96716 m/s. Second simulation is low pressure drop simulation which was using Flow Simulation. When the holes size of distributor is increasing from 2mm to 5mm, the low pressure drop performance will be better. It means the distributor with 5 mm holes the pressure drop is lower than other distributors. And the low pressure drop inlet velocity is around 2 m/s. It has compared with other researcher's result, it is closed. The result of simulations can be accepted.

5.2 RECOMMENDATION

The result of this paper is not a complete and perfect result. The result for different inlet air flow classifying simulation was based on only 5 velocities for each type of distributor. However, the result may be dissimilar if more velocities were used, but with little difference. Further research need to be done for more data and having more general flow coefficient distributor that can be used for general effect of flow and distributor classification. And also, the experiment is significant to continue this research.

REFERENCE

Saurabh Srivastava, Garima Mishra 2010; 2(4): 236-246 Fluid Bed Technology: Overview and Parameters for Process Selection

QIMaozhan, WANG Li , NI Xue zi 1998 Nonequilibrium thermodynamic model of fluidized beds

Yuqing FENG, Aibing YU 2009 CFD-DEM MODELLING OF GAS FLUIDIZATION OF PARTICLE MIXTURES WITH SIZE AND DENSITY DIFFERENCES

Hyun Tae Jang, Tae Sung Park, Wang Seog Cha 2009 Mixing–segregation phenomena of binary system in a fluidized bed

Kevin D. Seibert and Mark A. Burns 1998 Simulation of Structural Phenomena in Mixed-Particle Fluidized Beds

Lu Huilin, ZhaoYunhua, Jianmin Ding, Dimitri Gidaspow, LiWei 2007 Investigation of mixing/segregation of mixture particles in gas–solid fluidized beds

G. Kwant, W. Prins, W.P.M. van Swaaij 1995 Particle mixing and separation in a binary solids floating fluidized bed

Hideya Nakamura, Takayuki Tokuda, Tomohiro Iwasaki, Satoru Watano 2007 Numerical analysis of particle mixing in a rotating fluidized bed

D.C. Sau, K.C. Biswal 2011 Computational fluid dynamics and experimental study of the hydrodynamics of a gas–solid tapered fluidized bed

Xi-Zhong Chen, De-Pan Shi, Xi Gao, Zheng-Hong Luo 2011 A fundamental CFD study of the gas–solid flow field in fluidized bed polymerization reactors

Jian Chang, Shuqing Yang, Kai Zhang 2011 A particle-to-particle heat transfer model for dense gas–solid fluidized bed of binary mixture

Scott Cooper, Charles J. Coronella 2005 CFD simulations of particle mixing in a binary fluidized bed

K. SAVOLAINEN, R. KARVINEN 2010 PARTICLE MIXING IN GAS-SOLID BUBBLING BED

S.M. Tasirin, S.K. Kamarudin, A.M.A. Hweage 2008 Mixing Behavior of Binary Polymer Particles in Bubbling Fluidized Bed


A.E.QURESHI, D.E. CREASY 1987 Fluidised Bed Gas Distributors

D.Sathiyamoorthy, Masayuki Horio, 2003 On the influence of aspect ratio and distributor in gas fluidized beds

Scott Cooper, Charles J. Coronella 2005 CFD Simulations of particle mixing in a binary fluidized bed



APPENDIX A


GANTT CHART OF FYP

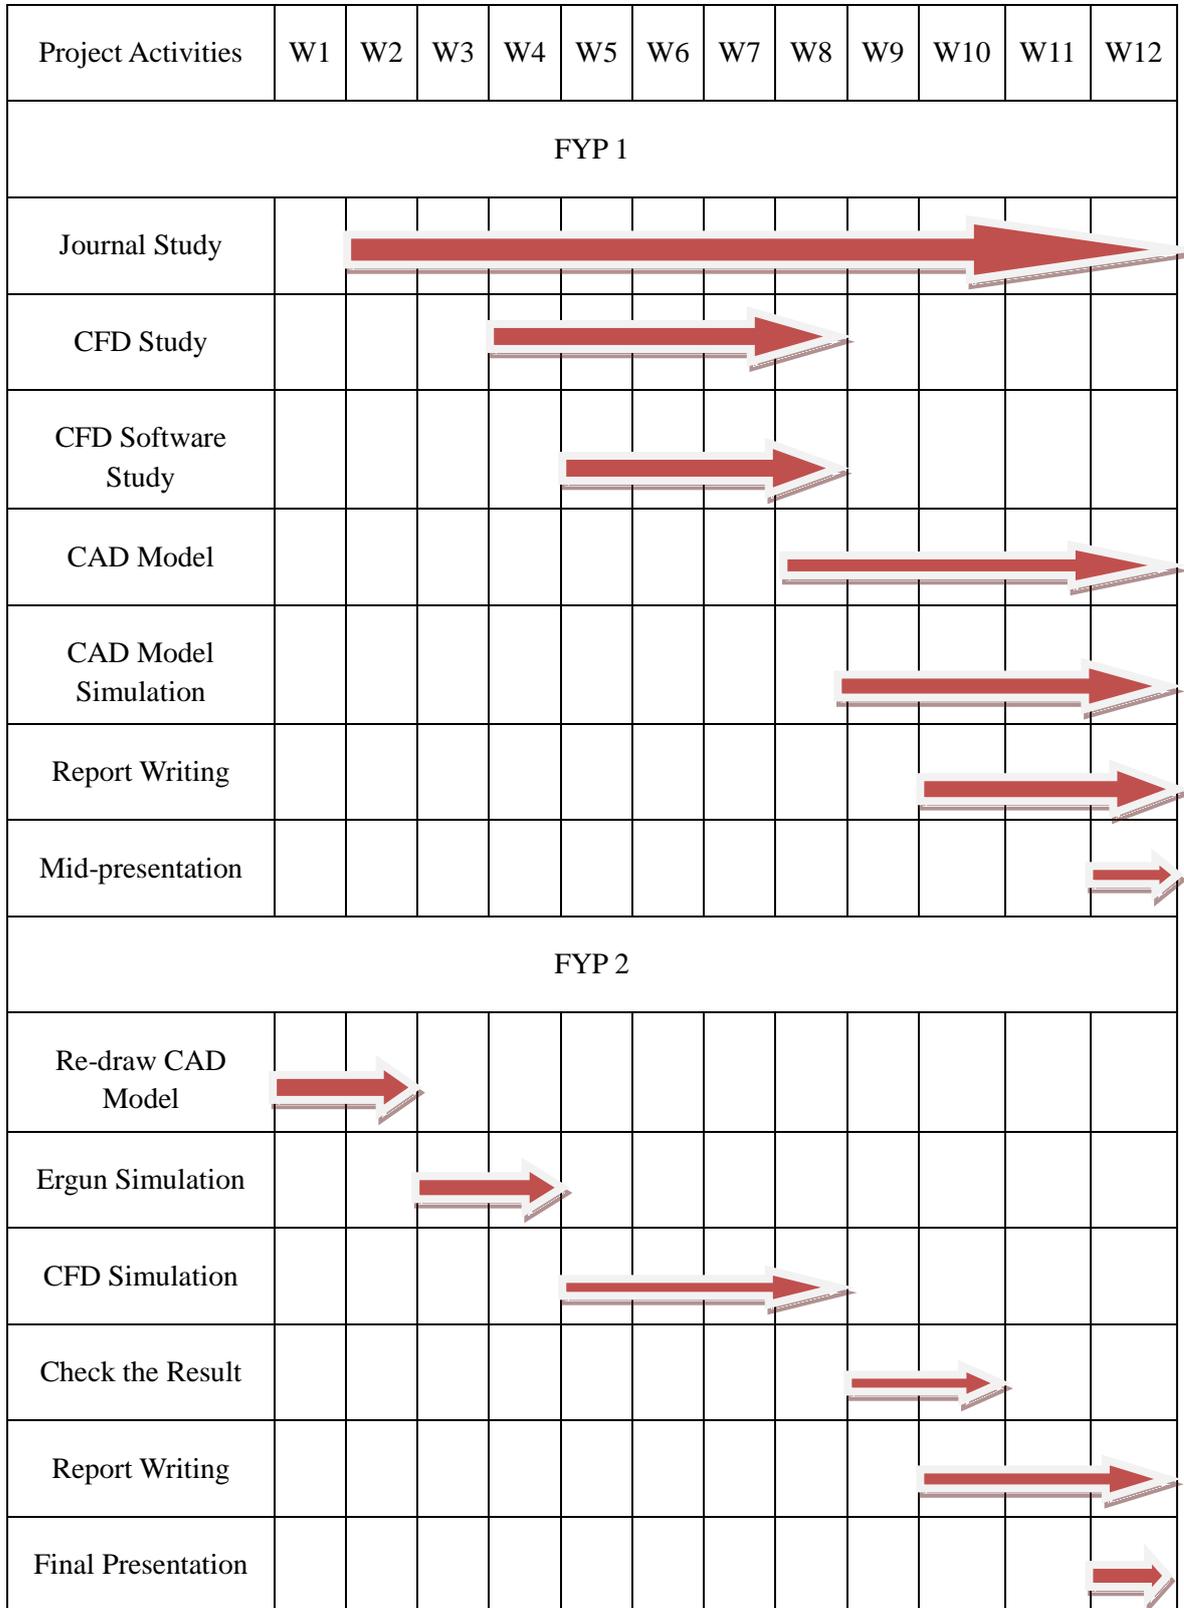



APPENDIX B


LIST OF SIMULATION RESULT

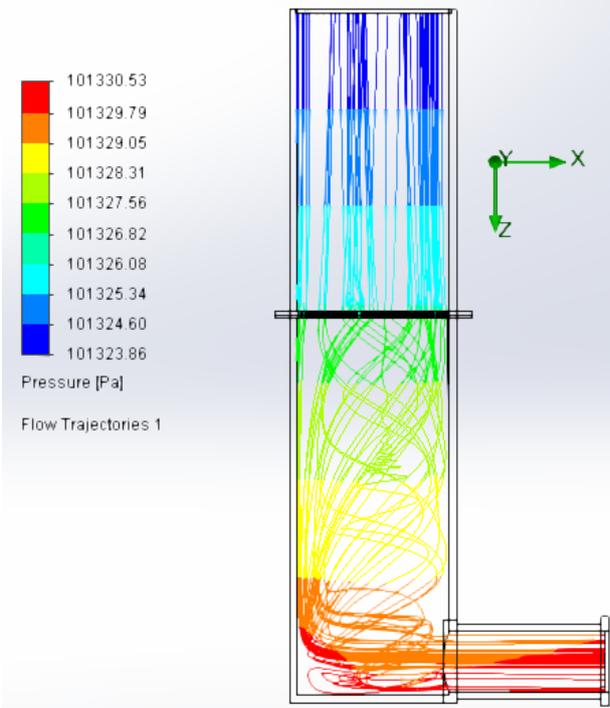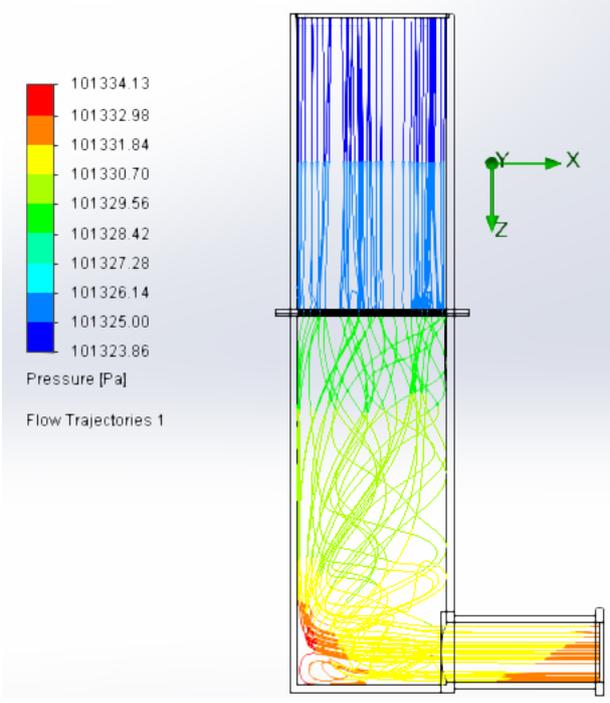
<p>2mm @ 1m/s</p>	
<p>2mm @ 2m/s</p>	

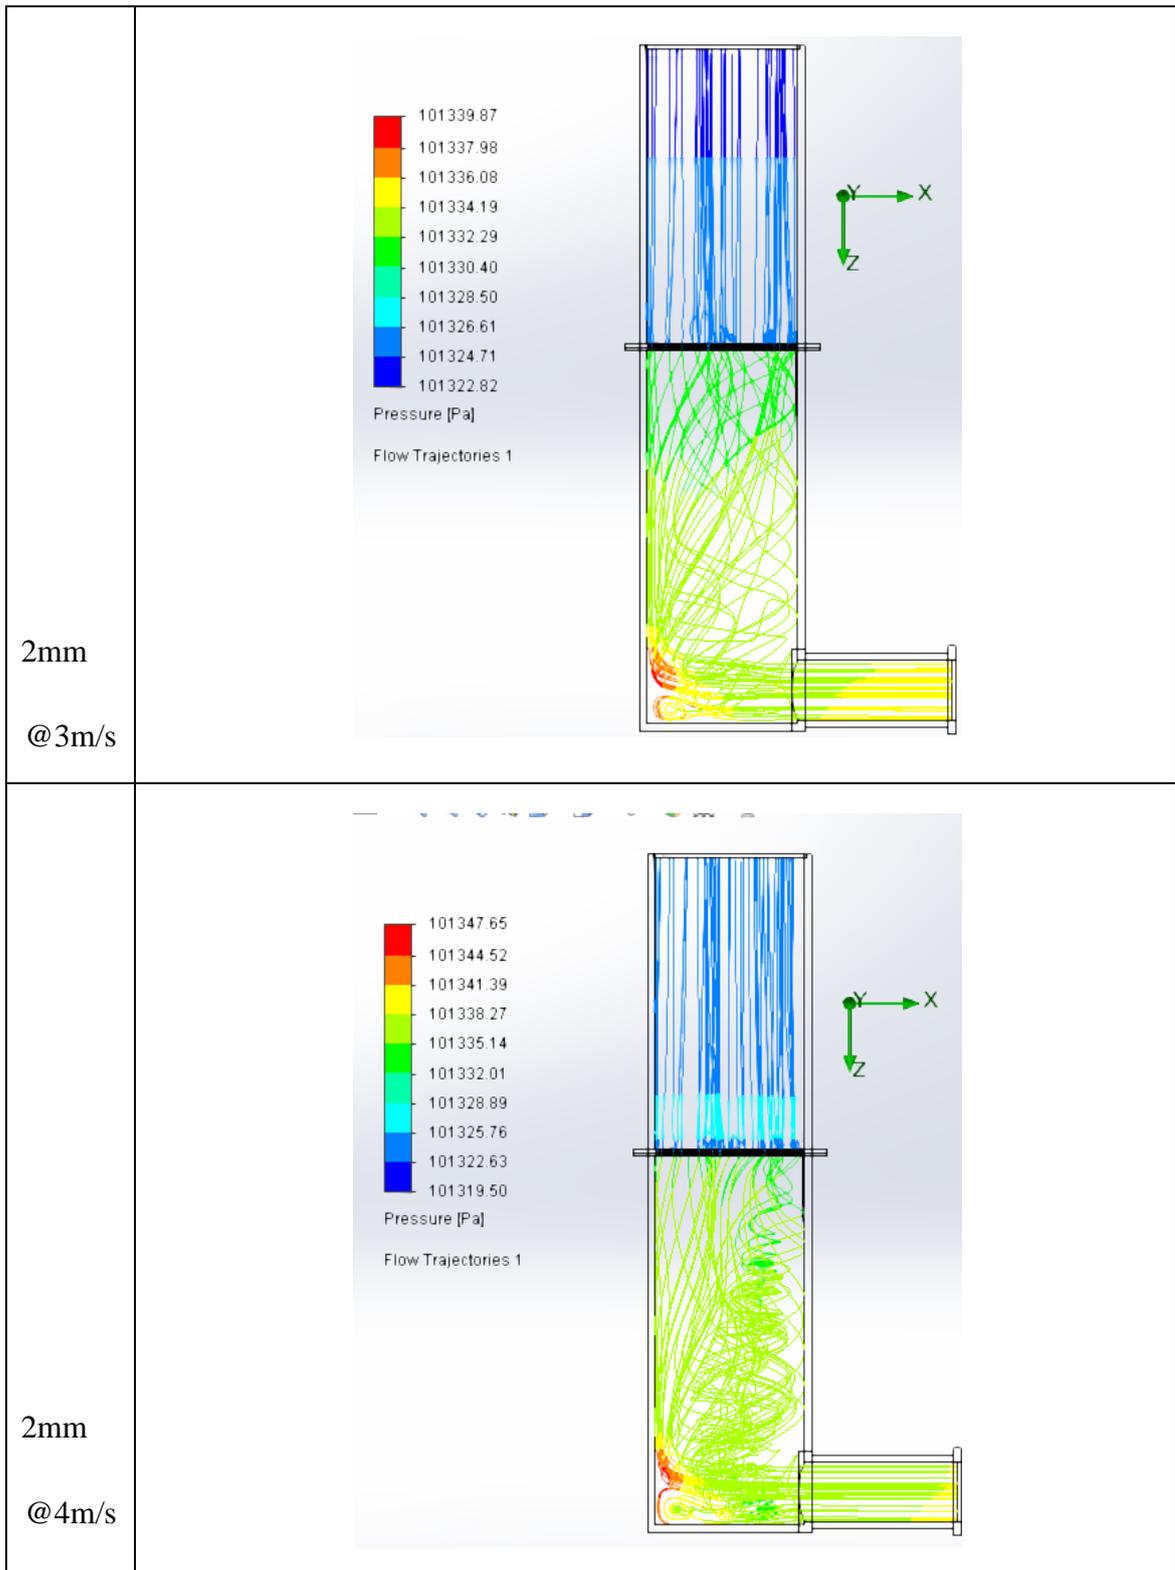


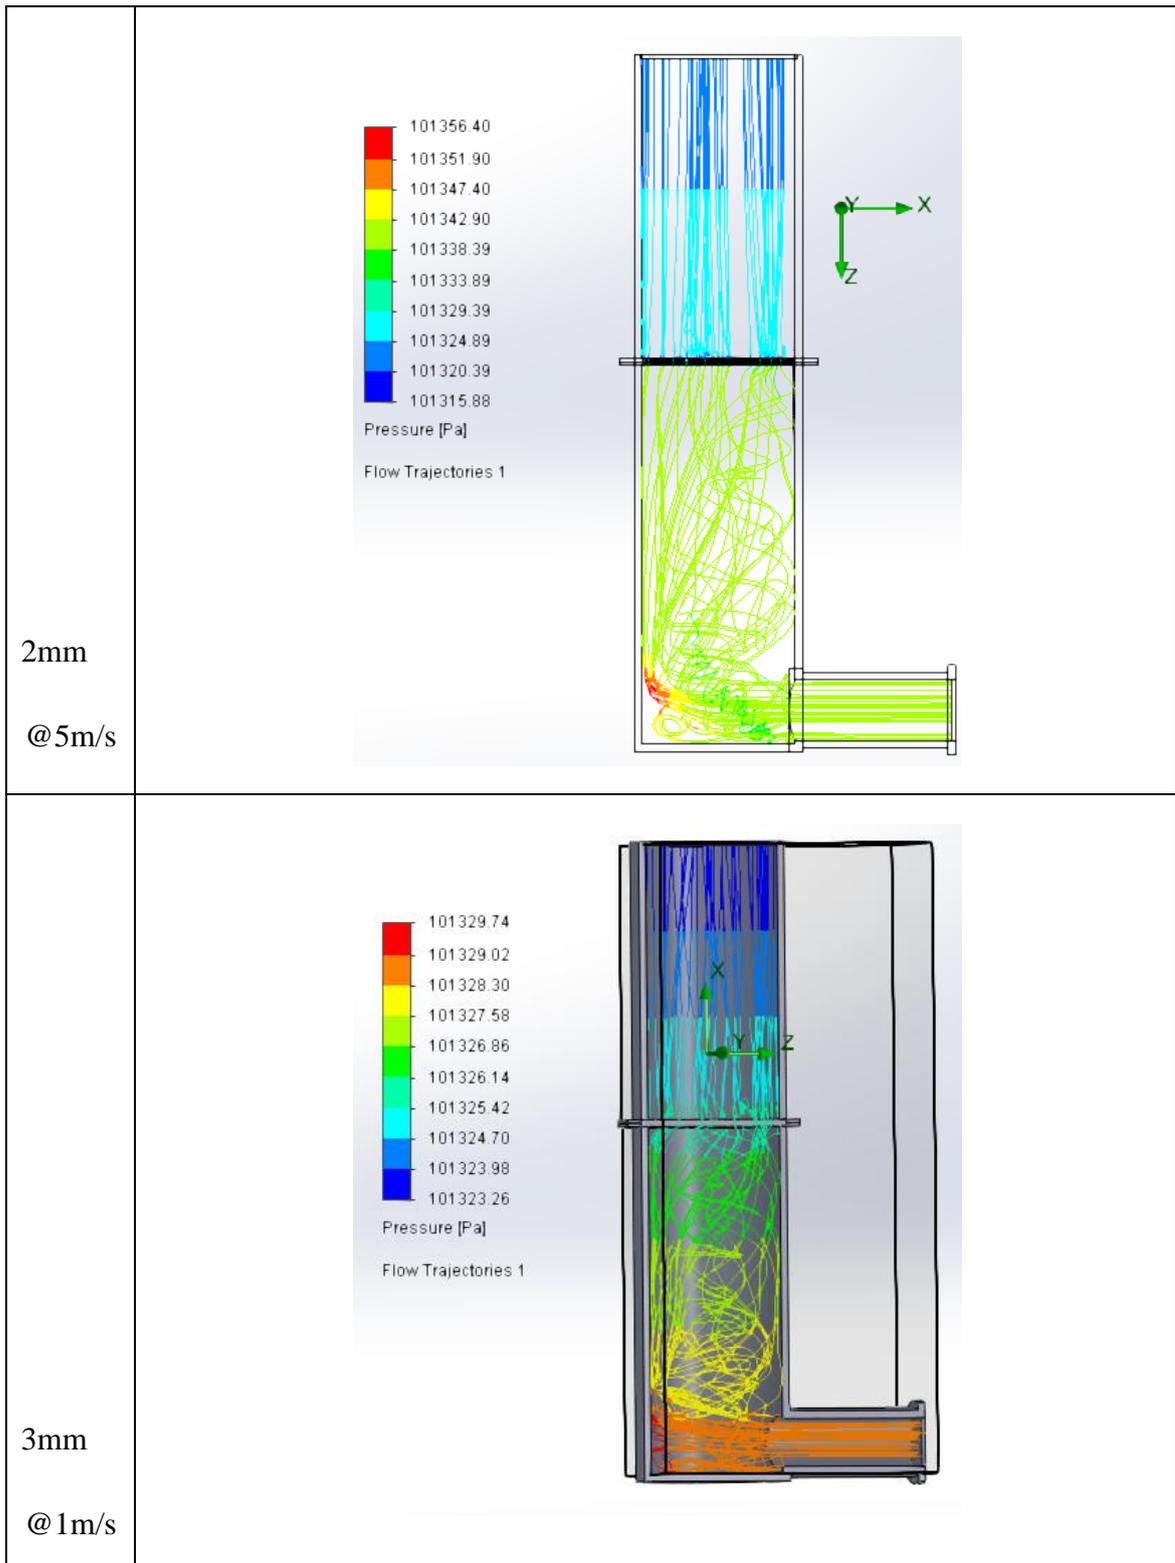


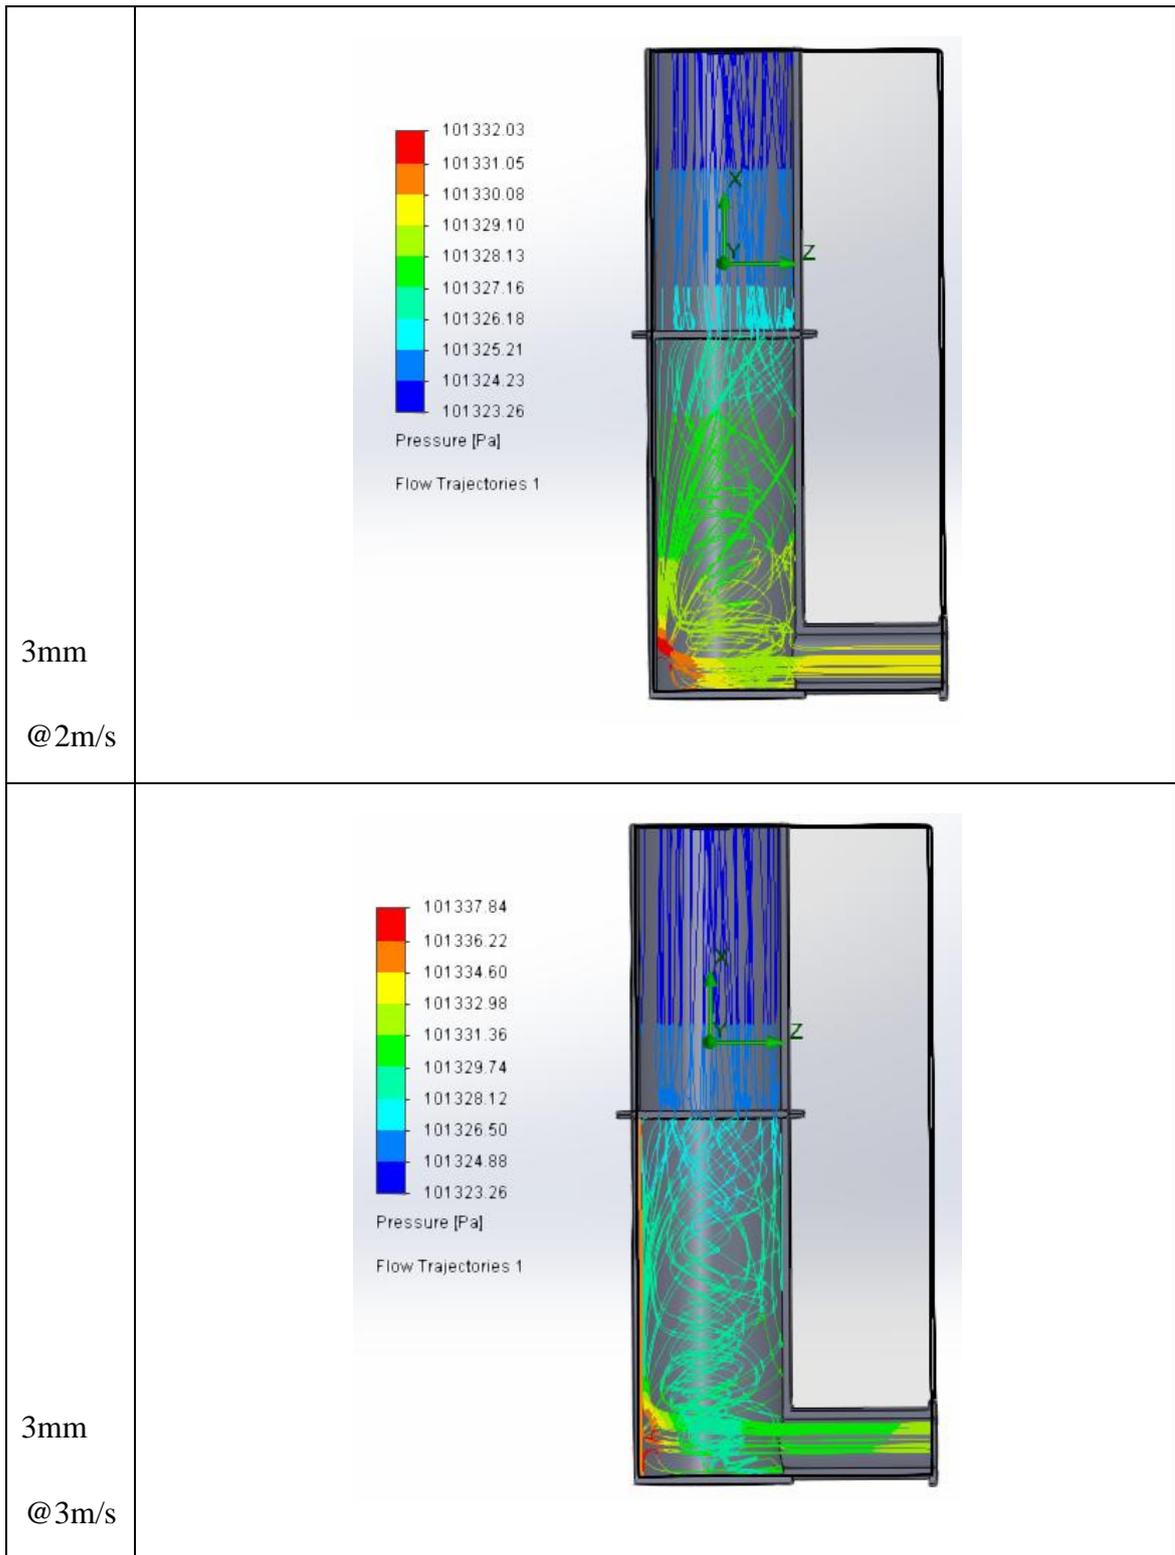


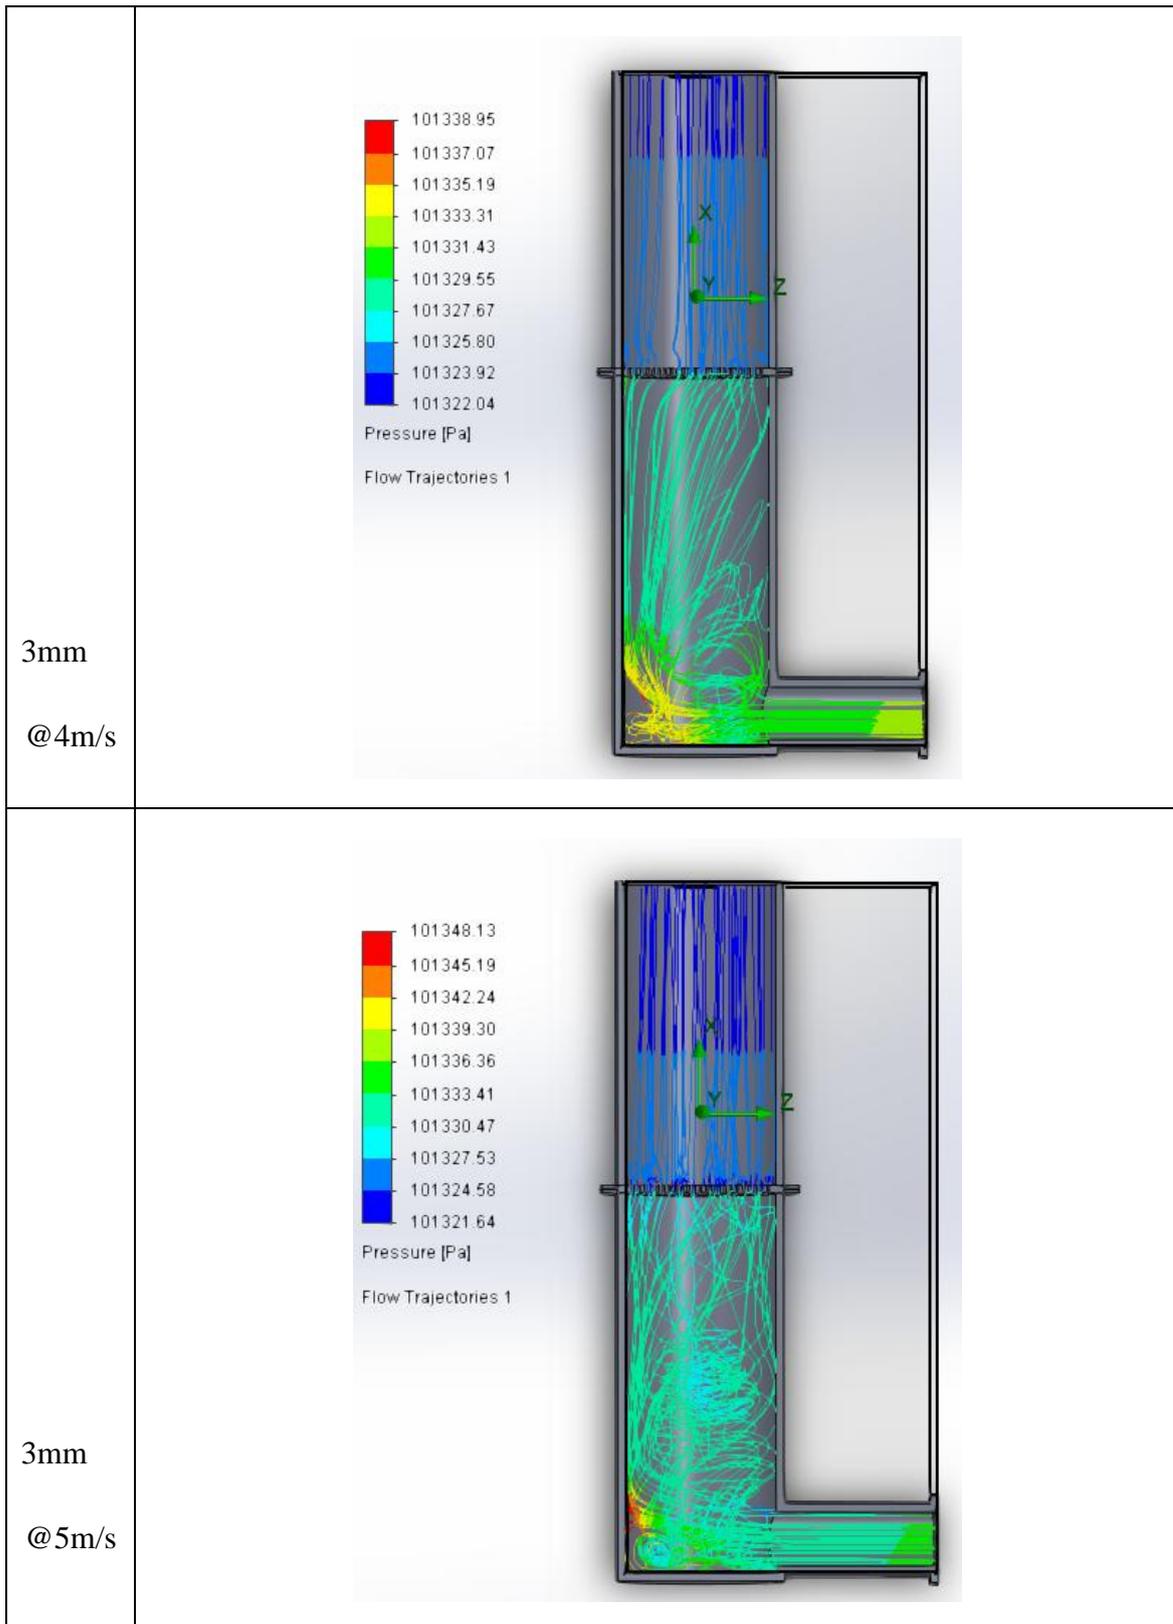


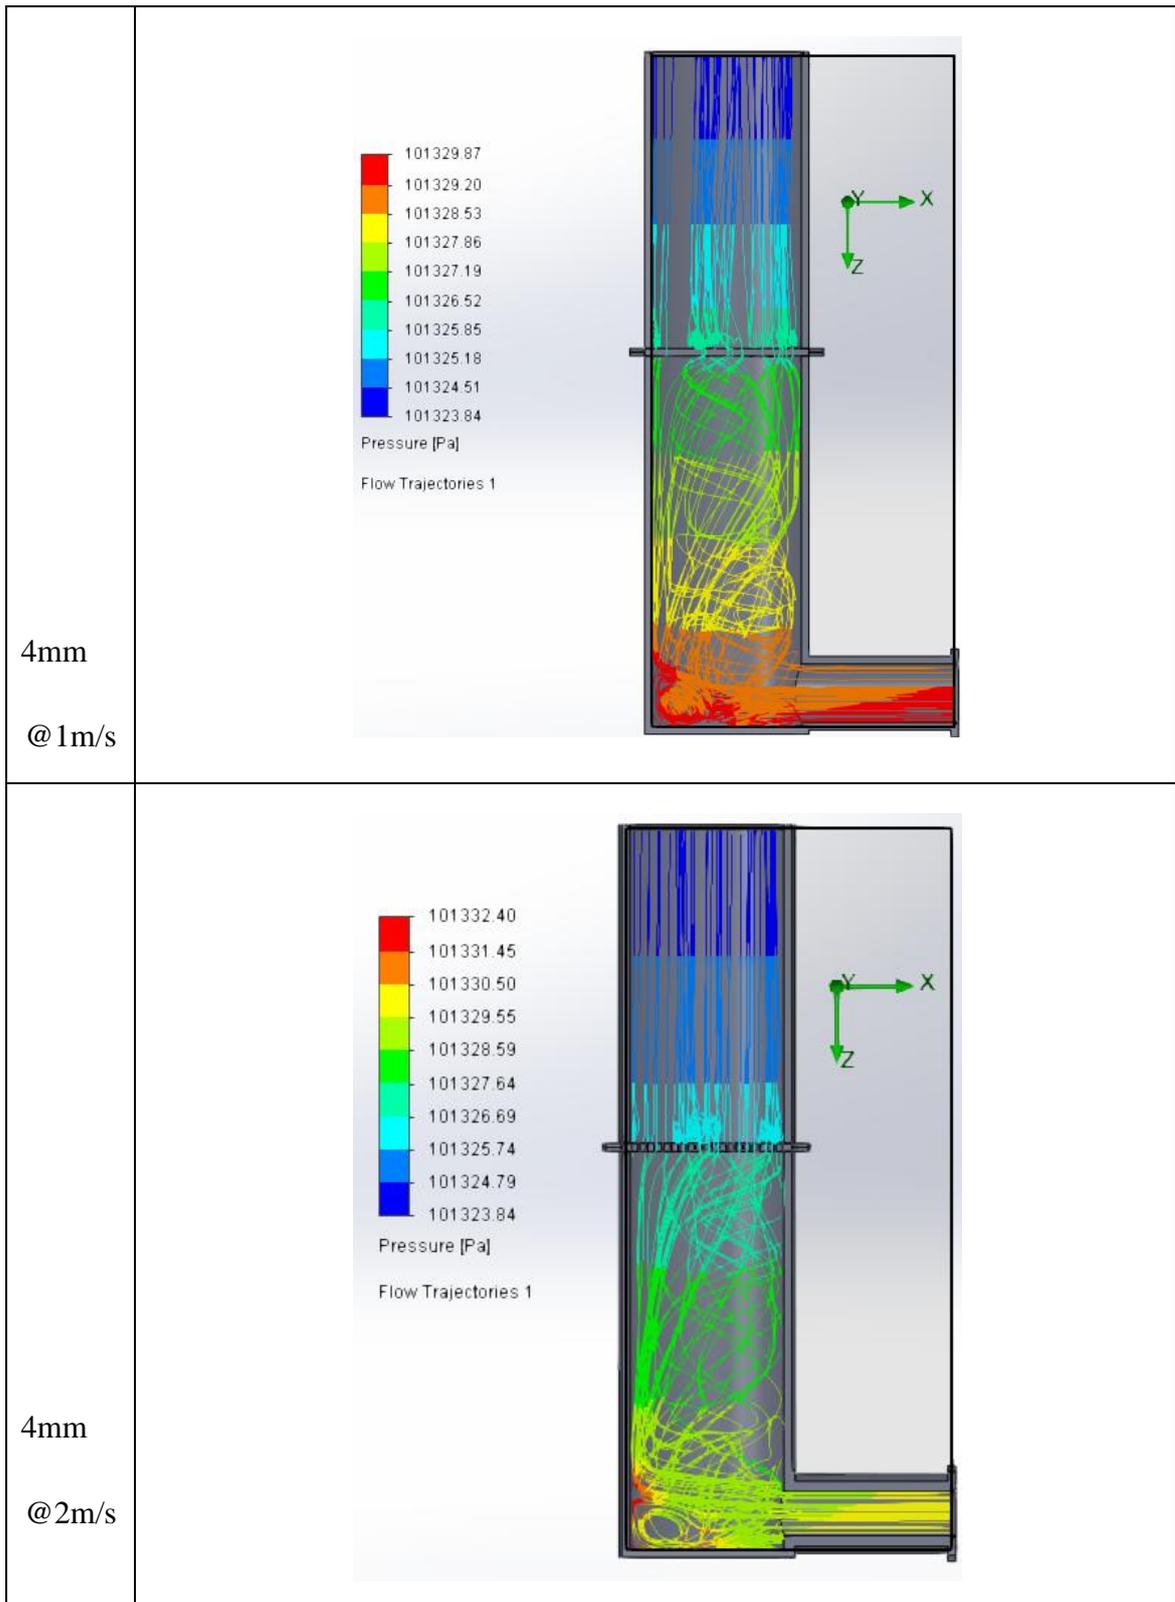

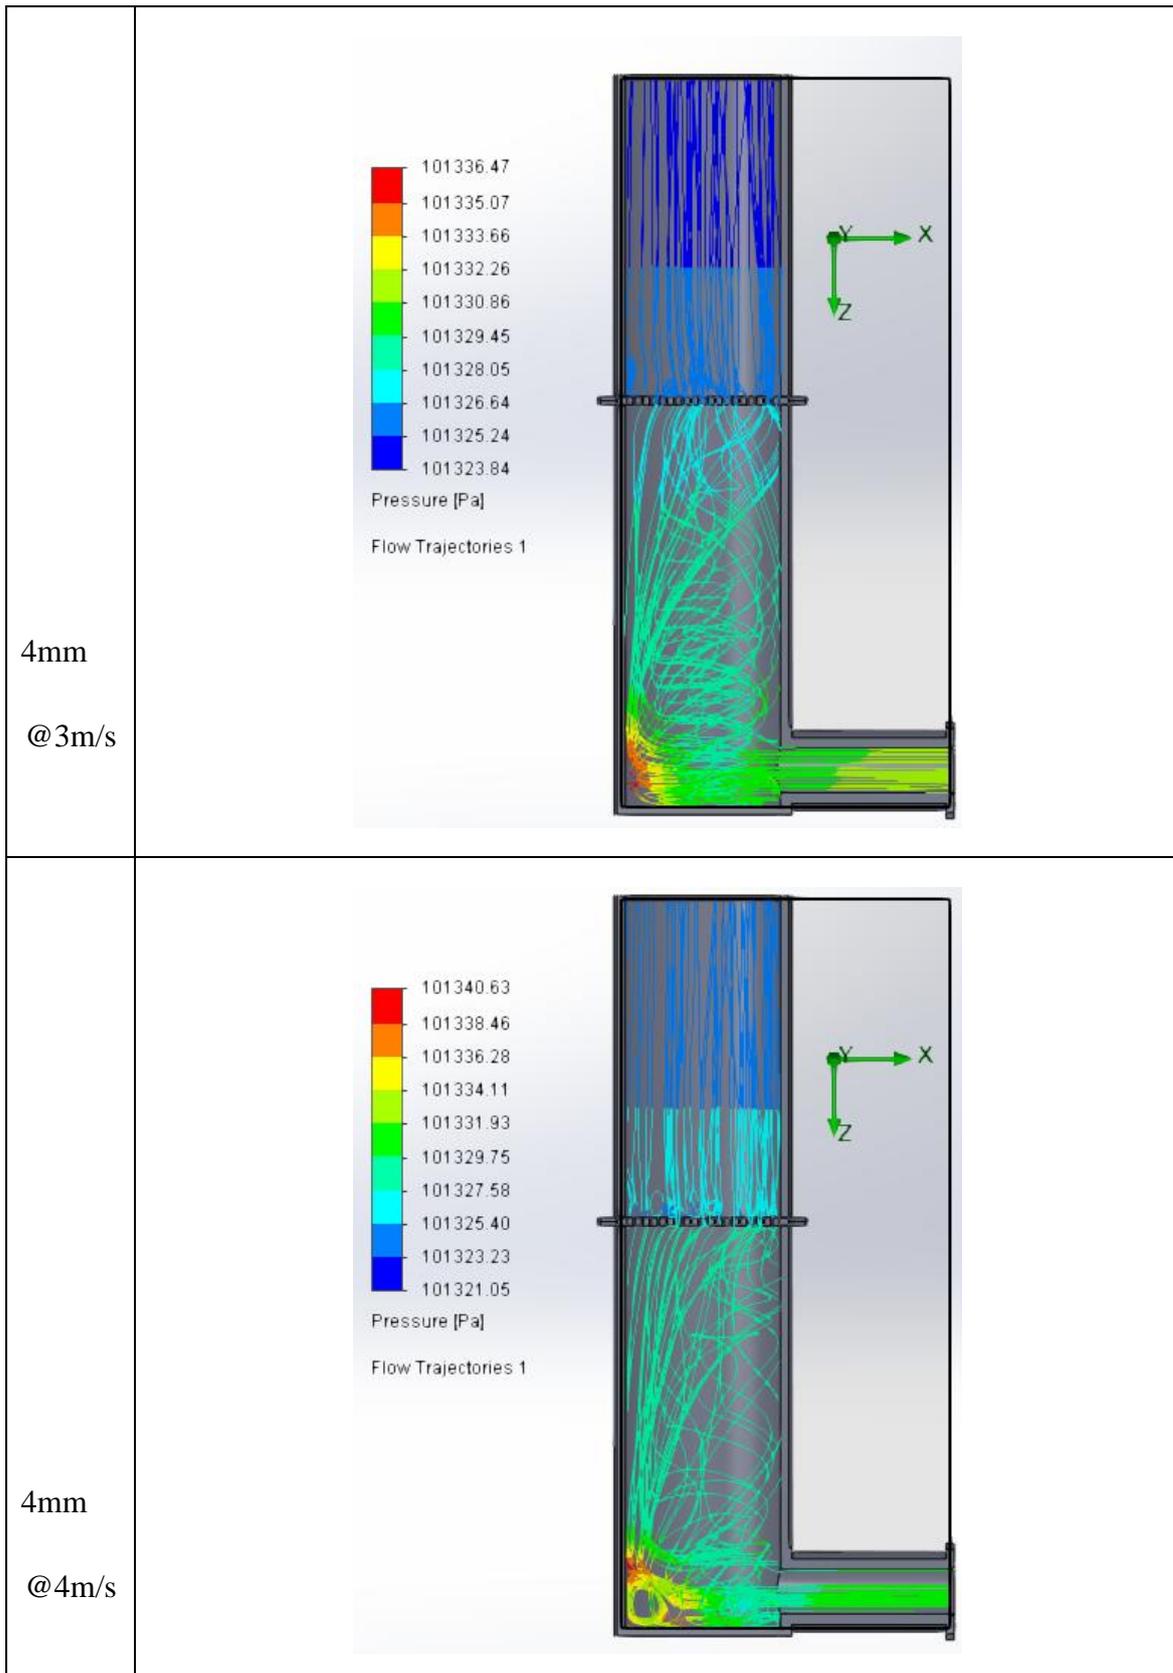

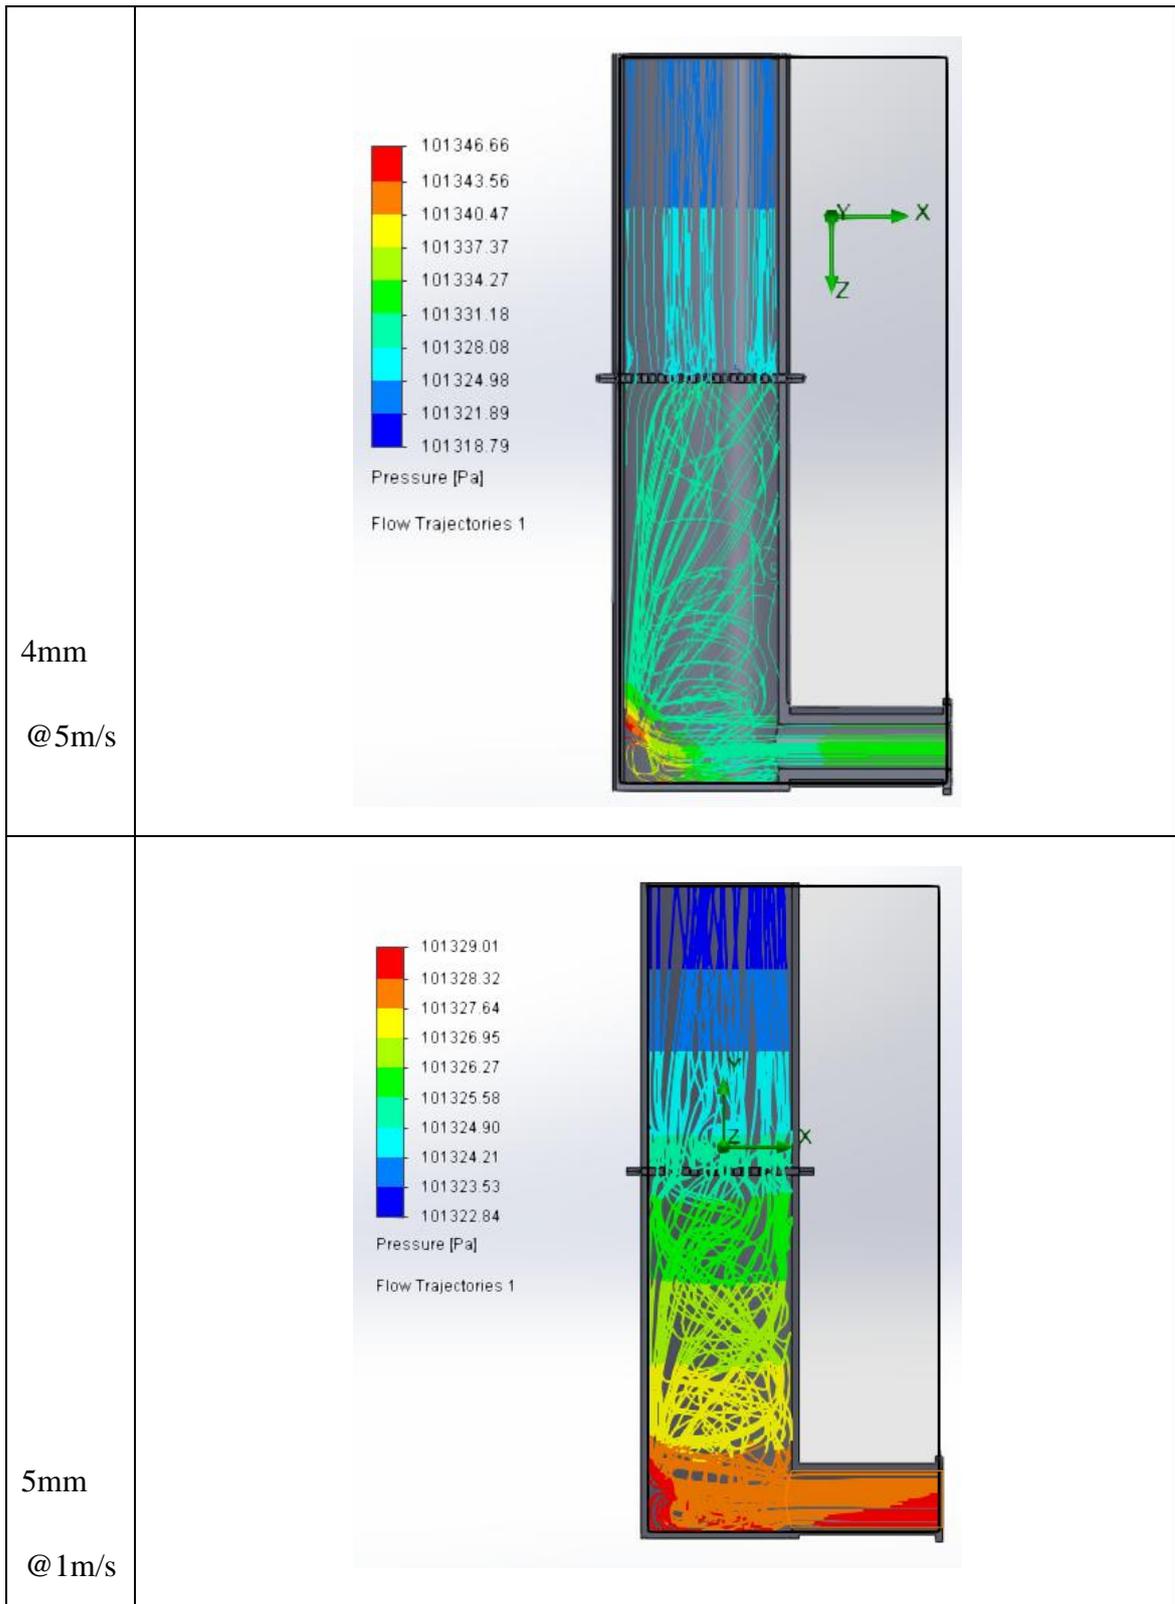

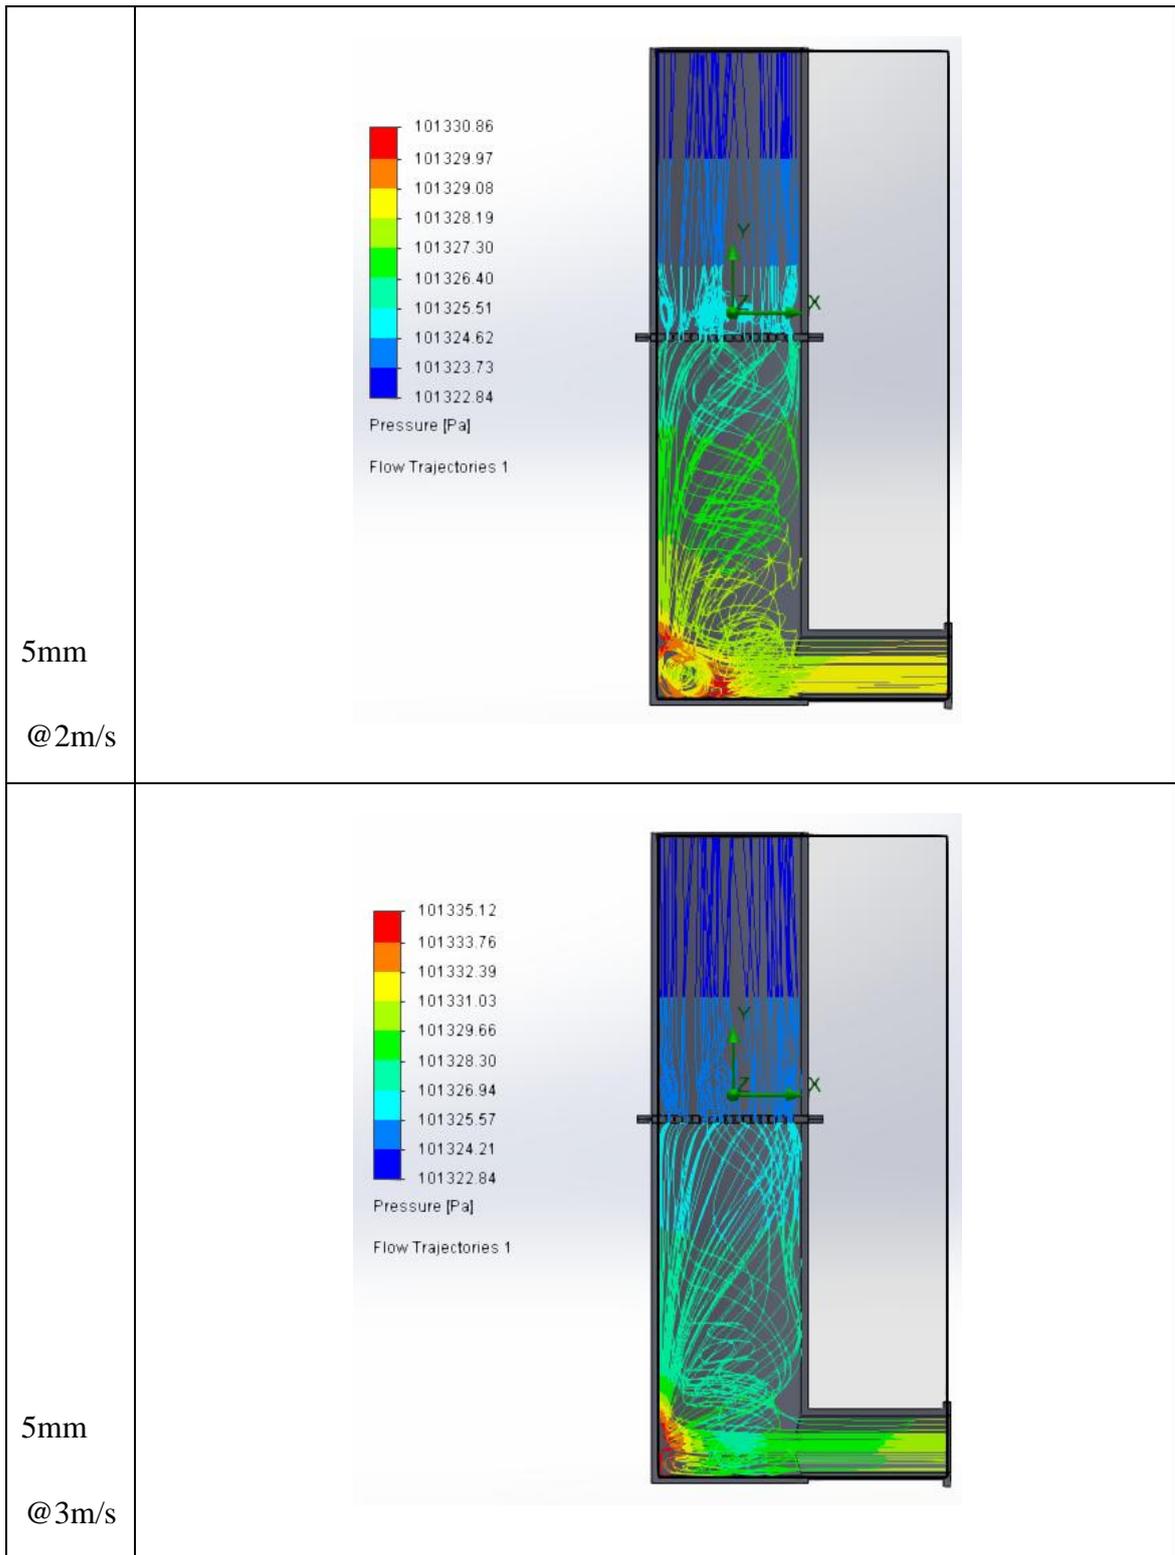

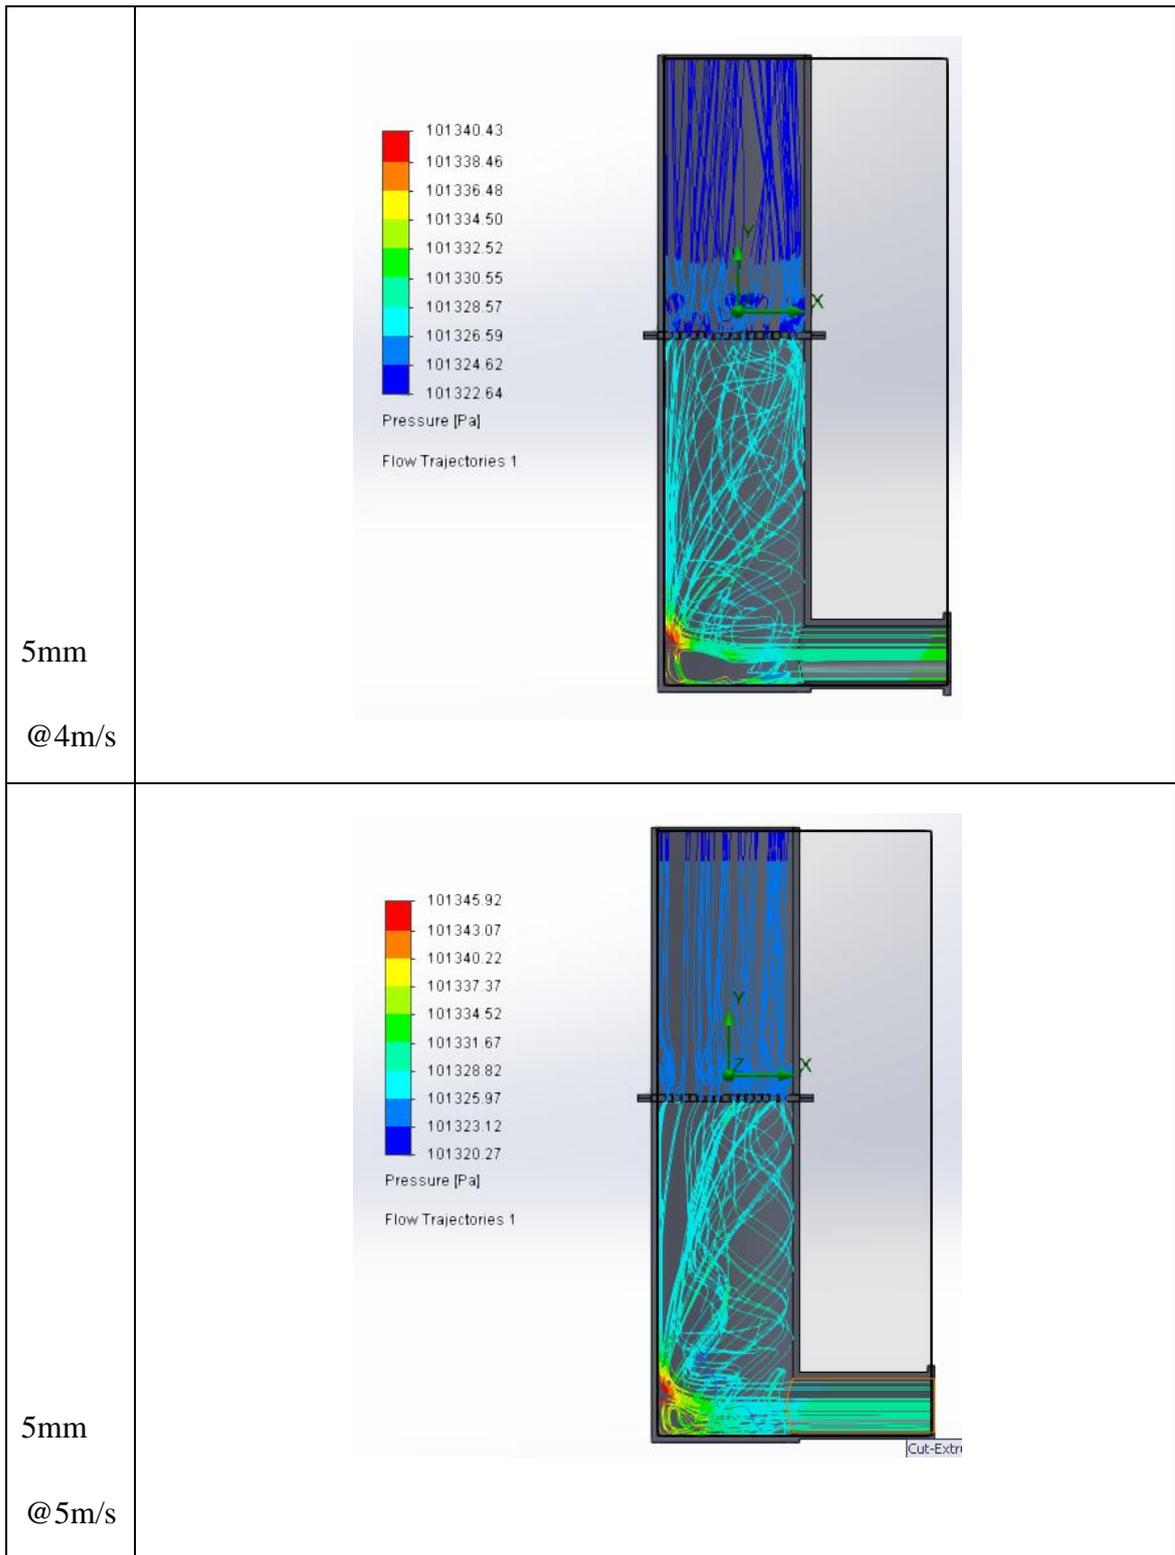

APPENDIX C

SOFTWARE SPECIFICATION

Type of Software	Name	Purpose
Operating System	<ul style="list-style-type: none"> • Microsoft Windows 7™ Home Premium • Microsoft Windows XP™ Home Basic SP3 	<ul style="list-style-type: none"> ➤ To run the computer program and software
Software Application	<ul style="list-style-type: none"> • Ergun 6.2 • Solidworks 2010 SP0.0 FloXpress • ANSYS 14 FLUENT 	<ul style="list-style-type: none"> ➤ To build the geometric model ➤ To run the simulations
	<ul style="list-style-type: none"> • Microsoft Office 2010 <ul style="list-style-type: none"> - Microsoft Office Word 2010 - Microsoft Office Project 2010 - Microsoft Office PowerPoint 2010 - Microsoft Office Excel 2010 	<ul style="list-style-type: none"> ➤ For documentation, to generate presentation slide, Gantt chart, and graphical diagram.

APPENDIX D

HARDWARE SPECIFICATION

Hardware	Specification	Purpose
Laptop 1	<ul style="list-style-type: none"> • -Intel(R)Pentium(R) M processor 740 @ 1.73GHz • -2 GB RAM • -Intel(R) Graphics Media Accelerator 900 • -60 GB HDD 	<ul style="list-style-type: none"> ➤ To run the Windows XP 32bit and Ergun 6.2
Laptop 2	<ul style="list-style-type: none"> • -Intel (R) Core (TM) i7-2630QM @ 2.0 to 2.9 GHz • -DDR3 8 GB RAM (4GB*2) • -640 GB HDD • -NVIDIA GT 555/ 2GB DDR3 	<ul style="list-style-type: none"> ➤ To run Windows 7 64bit ➤ To run Solidworks 2012 ➤ To run Flow Simulation ➤ To run ANASYS 14 ➤ To run Microsoft Office 2010